

KN MODERN AND CLASSIC DOOR HANDLES


CATALOGUE
2021



2027



MODERN HANDLES

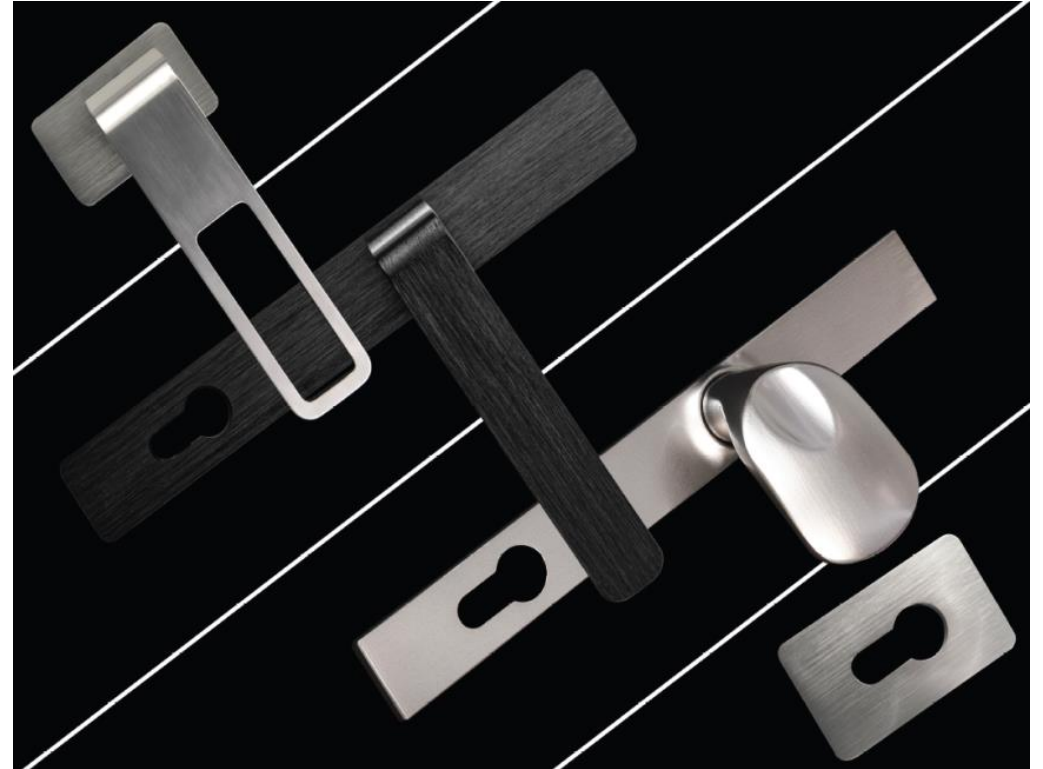

CLASSIC HANDLES

KN



MODERN HANDLES



MP-1100



MZ-1100



P1



P5



P8



P10 25-50



P10 30-40



P-10D



P44



P44D



P45



P45D



P10B



P45B



P45L



P60

MAIN MENU



Q10



Q10 20-40



Q10D



Q10RX



Q10RXD



Q45 10-25



Q45 20-40



Q45D



Q45RX 25



Q45RX 20-40




Q45RXD



Q60




MAIN MENU

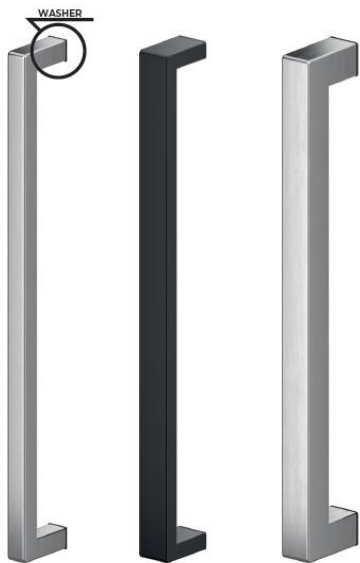

Q90



Q90D

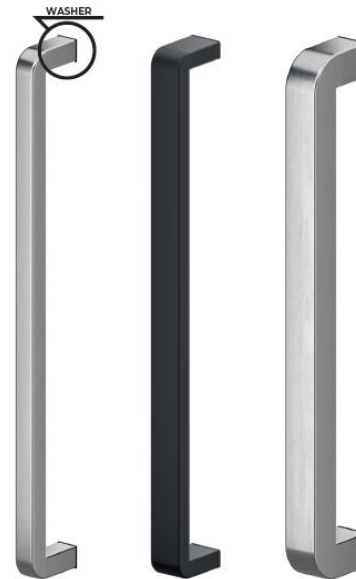

Q90C



Q90CD




Q135



Q135D



Q5

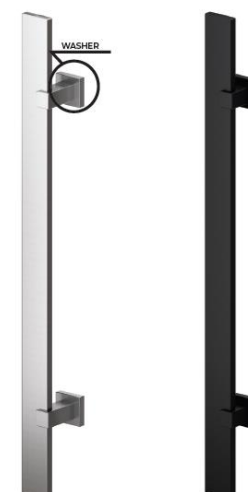


Q10X



Q45X

MAIN MENU

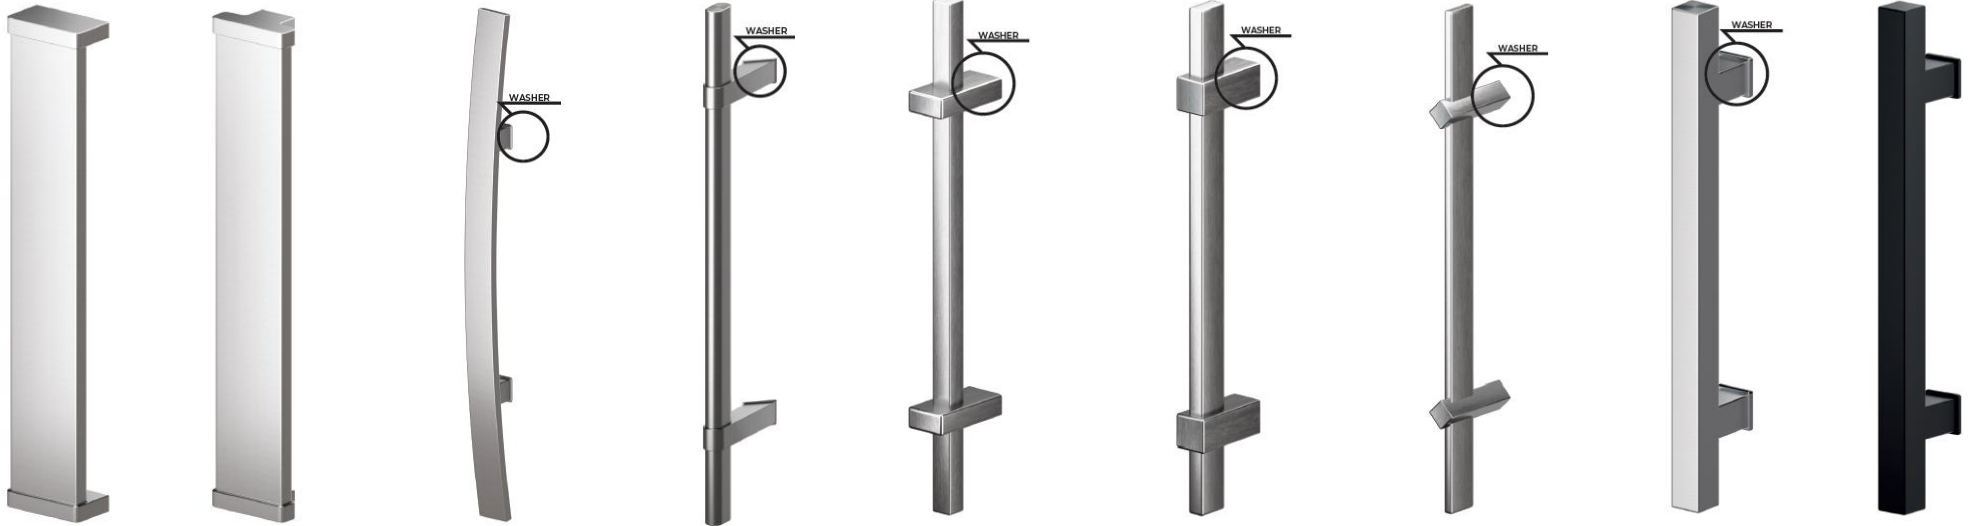

Q10ZX

Q10B

Q45P

Q10P

Q10PJ1

Q10PJ2

S10



S10J



DP10




DP45R




DQ10

MAIN MENU

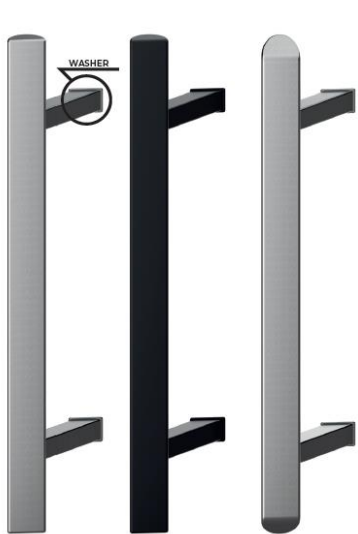

DQ45R

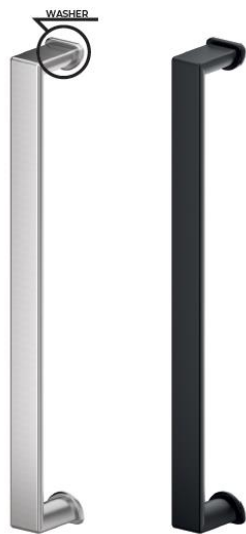

D90



DQS



QS



OS



PS-PS-W



PS11



PS12



PS21



Z1



Z1 OVAL



Z1 ELLIPSE



Z1N



Z1P



MAIN MENU



K1-K1L 150



K1-K1L 550



K1-K1L 115



K3



K5



KA1



KA1A 200



KA1A 250



EKEY



INDECOM 1



SOREX UNILOCK

MAIN MENU



INDECOM 2




SIEGENIA



NAVKOM



SOMMER

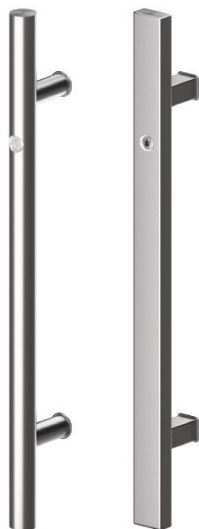


MICROSWITCH



TOUCH SENSOR



SWITCH

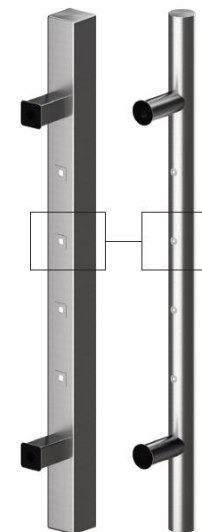

LED IN A TUBE

MP-1100

STEEL 304

POLISHED

BRUSHED (DEFAULT)

ALUMINIUM

7016

7021

7024

9005

8077

8019

8017

8003

1036W

9001

9010

9016

7035

9006

SILVER

ANODE NATURAL

GOLD W3

GOLD W4

RAL

BRASS*

CHROME PLATED

POLISHED

BRUSHED

WASHER

1100 (X)

891,3

644,6

30°

Ø 30

1.5

STEEL 304

Ø 30

2

ALUMINIUM BRASS

WASHER

TKO

STEEL - PLATE

THROUGH MOUNTING

GLASS-GLASS SHEET

Ø 30

Ø 30

65

95

2.5

Ø 35

5

5

Ø 35

7.5

5

Ø 35

1.5

4

1.5

Ø 35

3

5.5

[MAIN MENU](#)
[MODERN HANDLES](#)

MZ-1100



STEEL 304



POLISHED



BRUSHED (DEFAULT)



ALUMINIUM



7016



7021



7024



9005



8077



8019



8017



8003



1036W



9001



9010



9016



7035



9006



SILVER



ANODE NATURAL



GOLD W3



GOLD W4



RAL



BRASS*





CHROME PLATED








POLISHED




BRUSHED

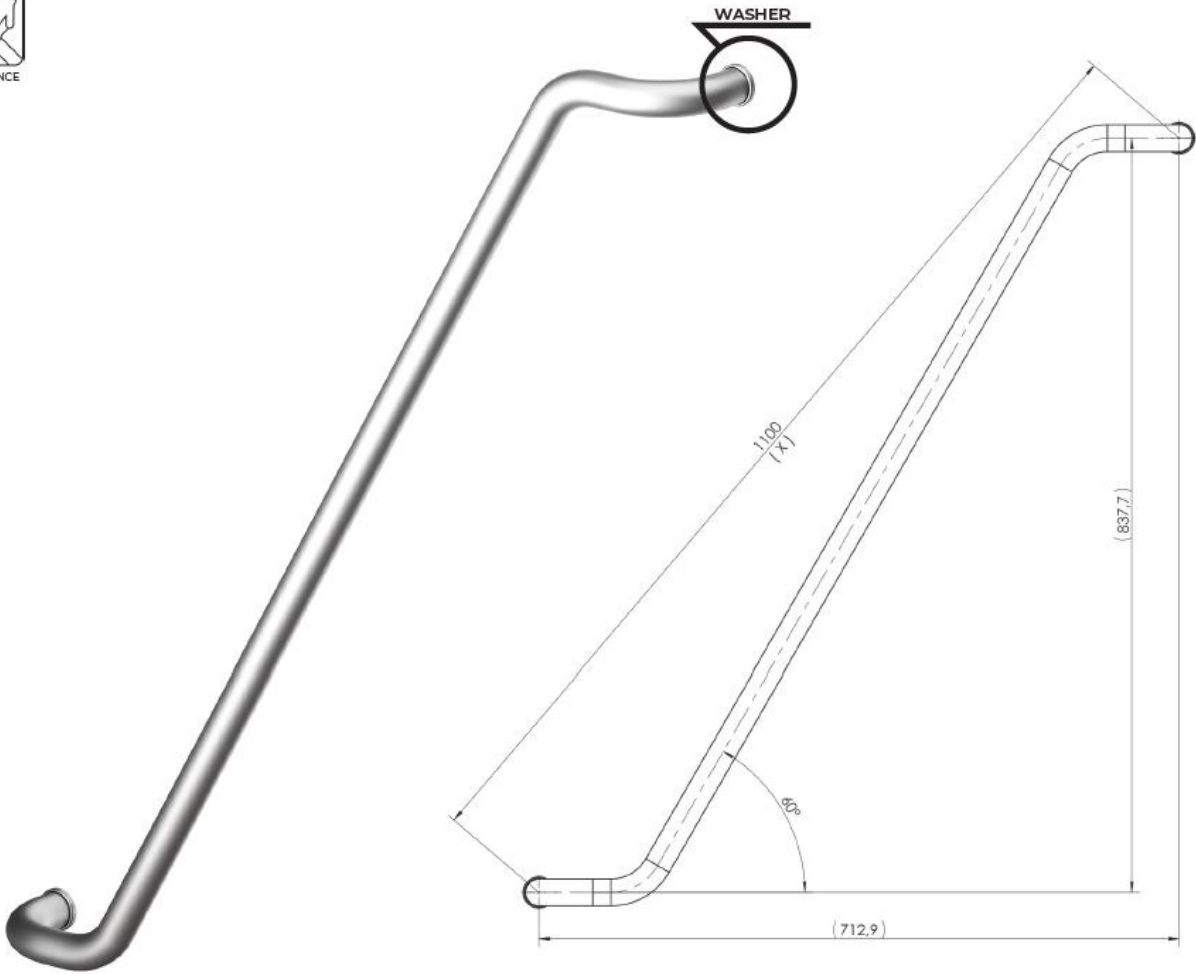

WASHER
 TKO
 STEEL - PLATE
 THROUGH MOUNTING
 GLASS-GLASS SHEET



STEEL 304






ALUMINIUM
BRASS

[MAIN MENU](#)
[MODERN HANDLES](#)






P1

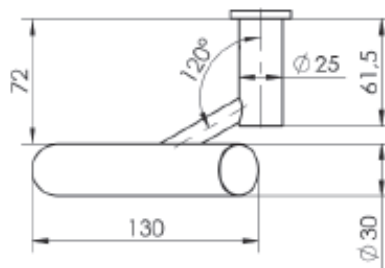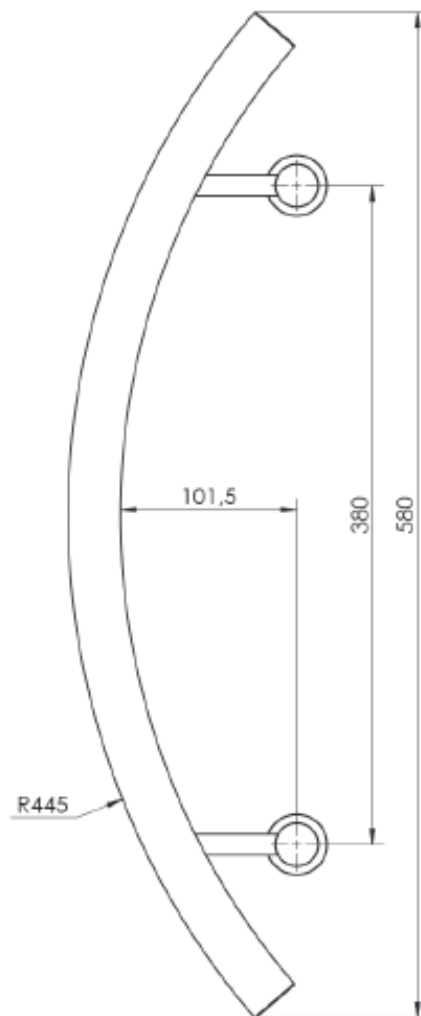

KN

[MAIN MENU](#)
[MODERN HANDLES](#)





P5

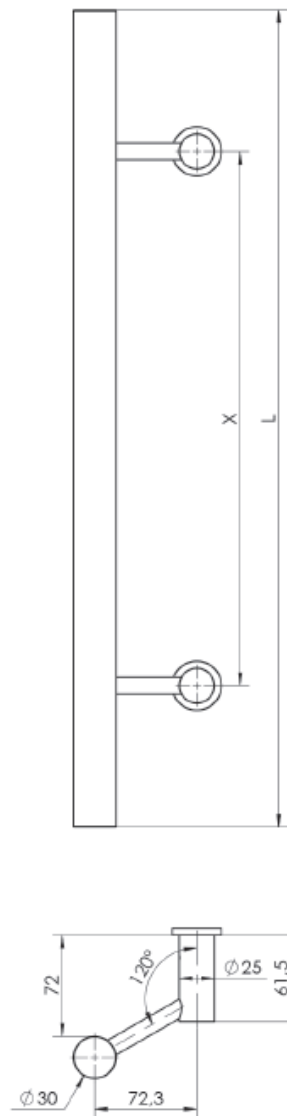

LENGTH L	HOLE SPACING X	Ø 30
406 - 960	206 - 760	•
*2200	*2000	•

- Product made for individual order
- Product unavailable
- * 3 base recommended








P8

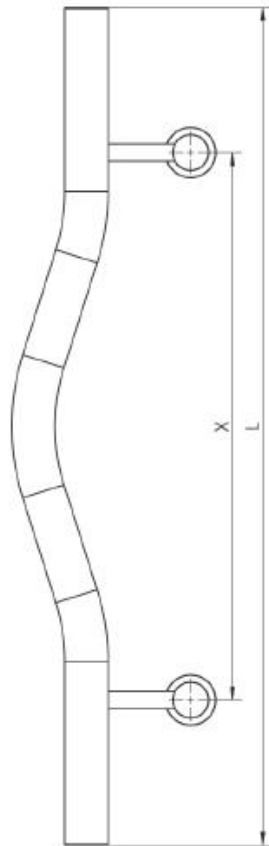

LENGTH L	HOLE SPACING X	Ø 30
580 - 980	380 - 780	•

- Product made for individual order
- Product unavailable

P10 25-50

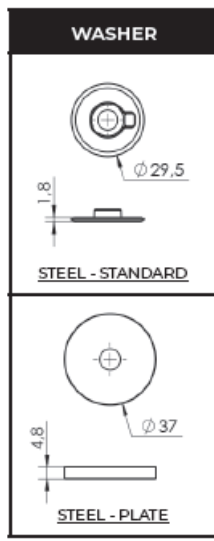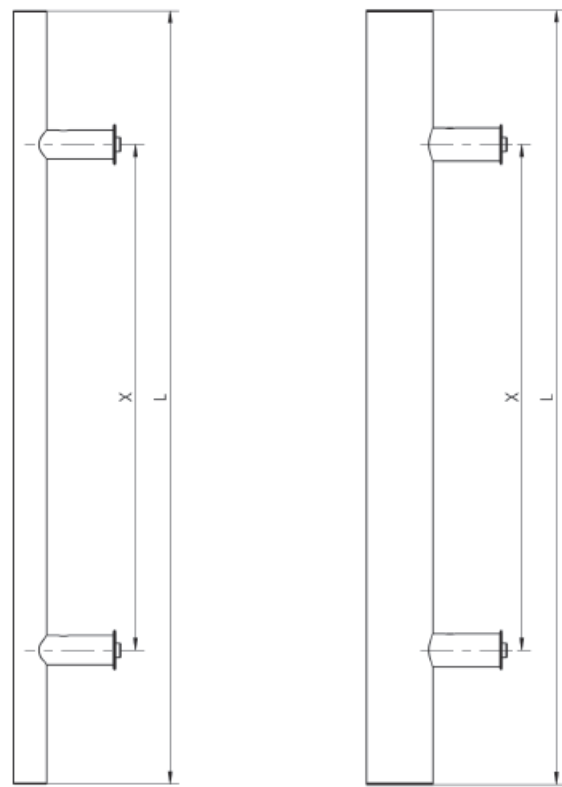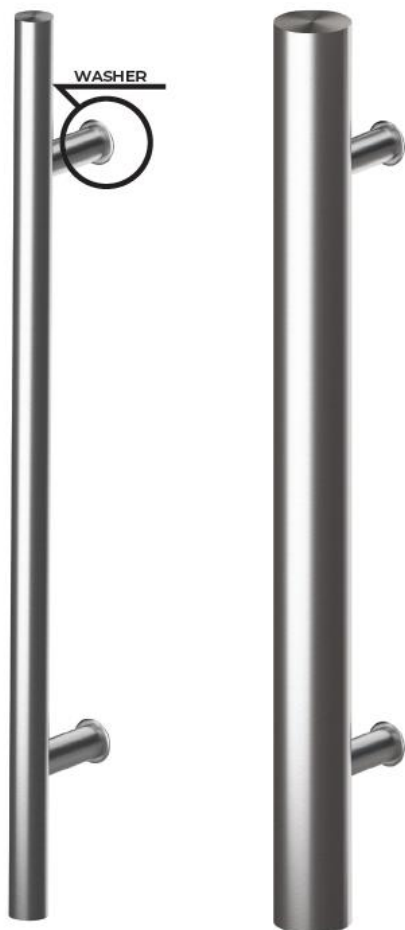







LENGTH L	HOLE SPACING X	304		316	
		Ø25	Ø50	Ø25	Ø50
300 - 580	200 - 380	•	◦	◦	◦
600 - 1000	400 - 800	•	◦	•	◦
1200	1000	•	•	◦	◦
1400	1200	◦	•	◦	◦
1600	1200	◦	•	◦	•
1800	1300	◦	•	◦	◦
2000 - 2200	1800 - 2000	◦	•	◦	•
max 3500	max 3000	◦	•	◦	•

• Product made for individual order
◦ Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)

P10 30-40

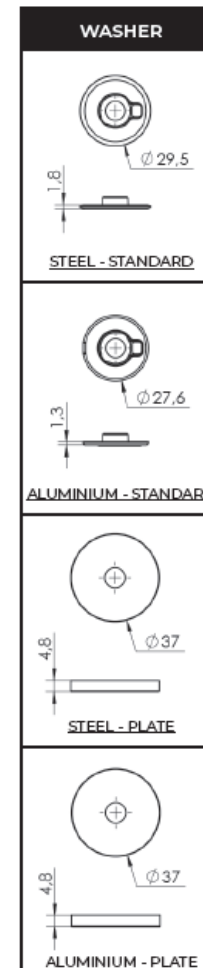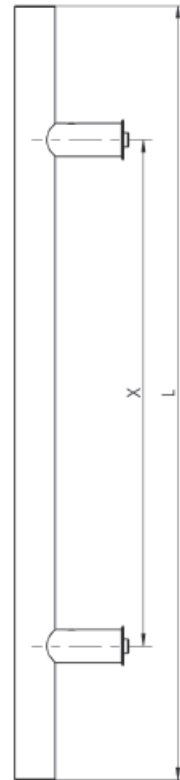

LENGTH L	HOLE SPACING X	304		316		ALUMINIUM	
		Ø30	Ø40	Ø30	Ø40	Ø30	Ø40
300 - 580	200 - 380	•	•	•	•	•	•
600	400	•	•	•	•	•	•
800 - 1000	600 - 800	•	•	•	•	•	•
1200	1000	•	•	•	•	•	•
1400	1200	•	•	•	•	•	•
1600	1200	•	•	•	•	•	•
1800	1300	•	•	•	•	•	•
2000 - 2200	1800 - 2000	•	•	•	•	•	•
max 2600	max 2300	•	•	•	•	L max 2600	


• Product made for individual order
 • Product unavailable
 From L2300 in aluminium, 3 base recommended



KN

MAIN MENU
MODERN HANDLES

P10D

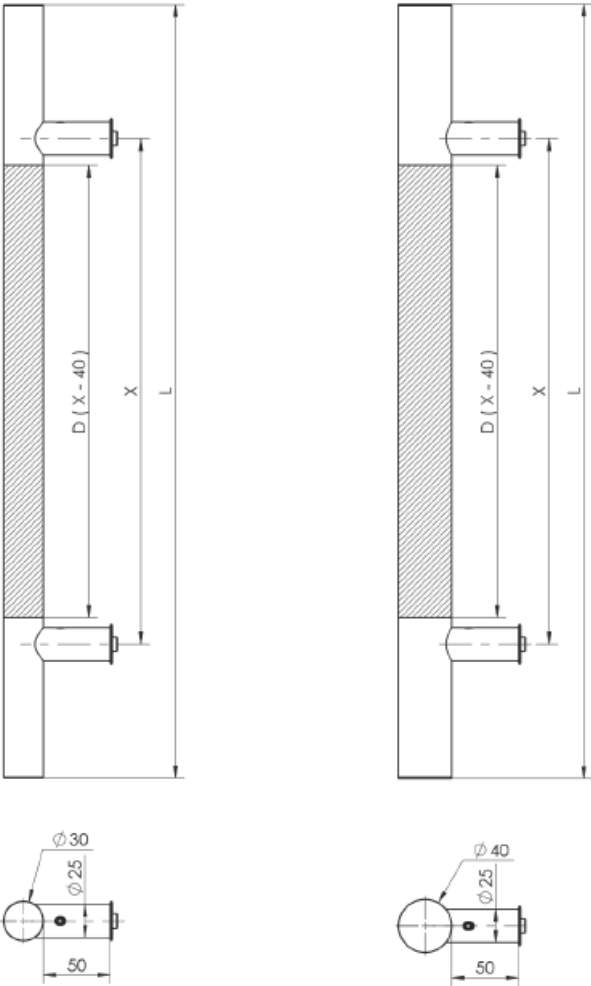


LENGTH L	HOLE SPACING X	304		316		ALUMINIUM	
		Ø30	Ø40	Ø30	Ø40	Ø30	Ø40
580 - 800	380 - 600	*	o	*	o	*	o
1200	1000	*	*	*	*	*	*
1600	1000	*	o	*	o	*	o
1600	1400	o	*	o	*	o	*

- Product made for individual order
- o Product unavailable



The handle with the wooden baluster should be protected against rain and sun by inserting the door in recesses or using a roof above the door mounted in straight walls. The roof should shade the handle with the baluster at noon in the summer. It is recommended to carry out periodic care: 2-3 times a year. After wiping with a soft cloth moistened with water, protect the painting surface with a wood care agent (alkaline or solvent agents cannot be used for maintenance).

If the door does not have the required roofing, the handle will not be covered by the warranty.
During external and internal works of the building, the handle should be protected against dirt.

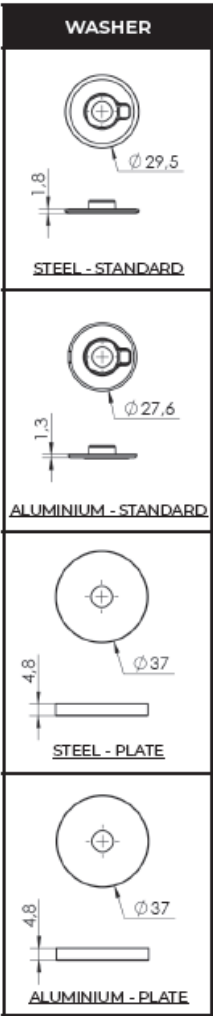

[MAIN MENU](#)
[MODERN HANDLES](#)

P44

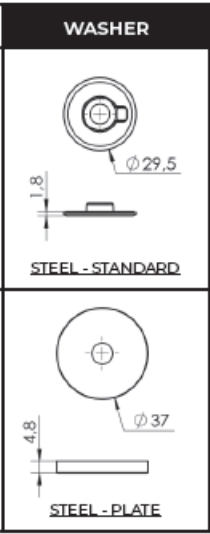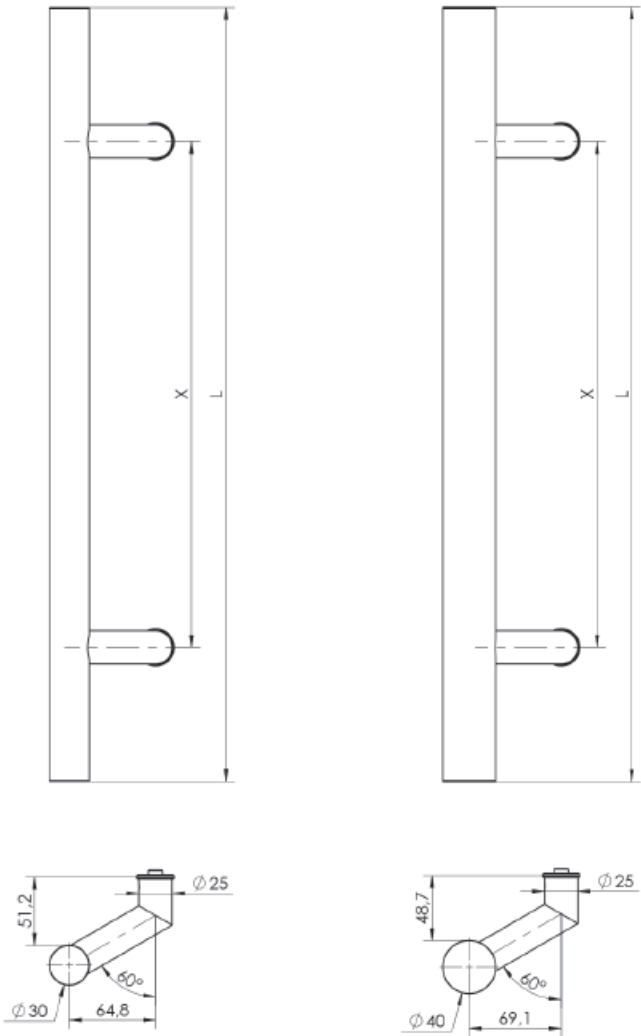



LENGTH L	HOLE SPACING X	304		316	
		Ø30	Ø40	Ø30	Ø40
300 - 580	200 - 380	•	•	•	•
600 - 1000	400 - 800	•	•	•	•
1200 - 1400	1000 - 1200	•	•	•	•
1600	1200	•	•	•	•
1800	1300	•	•	•	•
2000 - 2200	1800 - 2000	•	•	•	•
max 2600	max 2300	•	•	•	•

• Product made for individual order
• Product unavailable

[MAIN MENU](#)
[MODERN HANDLES](#)



P44D

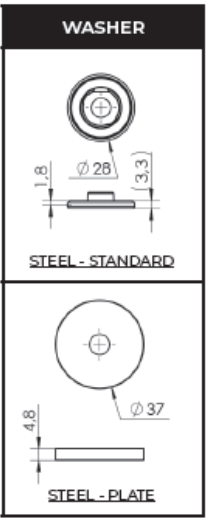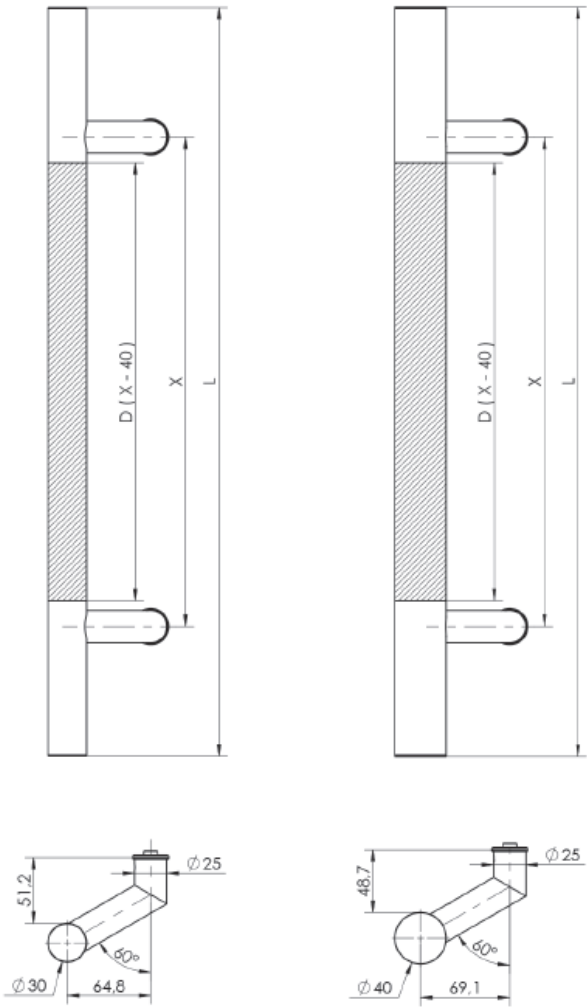

LENGTH L	HOLE SPACING X	304		316	
		Ø30	Ø40	Ø30	Ø40
580 - 800	380 - 600	•	•	•	•
1200	1000	•	•	•	•
1600	1000	•	•	•	•
1600	1400	•	•	•	•

- Product made for individual order
- Product unavailable






The handle with the wooden baluster should be protected against rain and sun by inserting the door in recesses or using a roof above the door mounted in straight walls. The roof should shade the handle with the baluster at noon in the summer. It is recommended to carry out periodic care: 2-3 times a year. After wiping with a soft cloth moistened with water, protect the painting surface with a wood care agent (alkaline or solvent agents cannot be used for maintenance).

If the door does not have the required roofing, the handle will not be covered by the warranty.
During external and internal works of the building, the handle should be protected against dirt.



[MAIN MENU](#)
[MODERN HANDLES](#)


P45

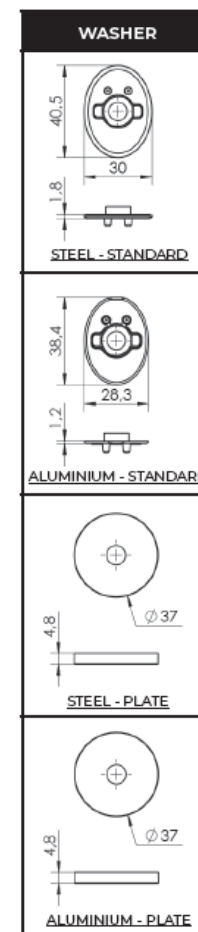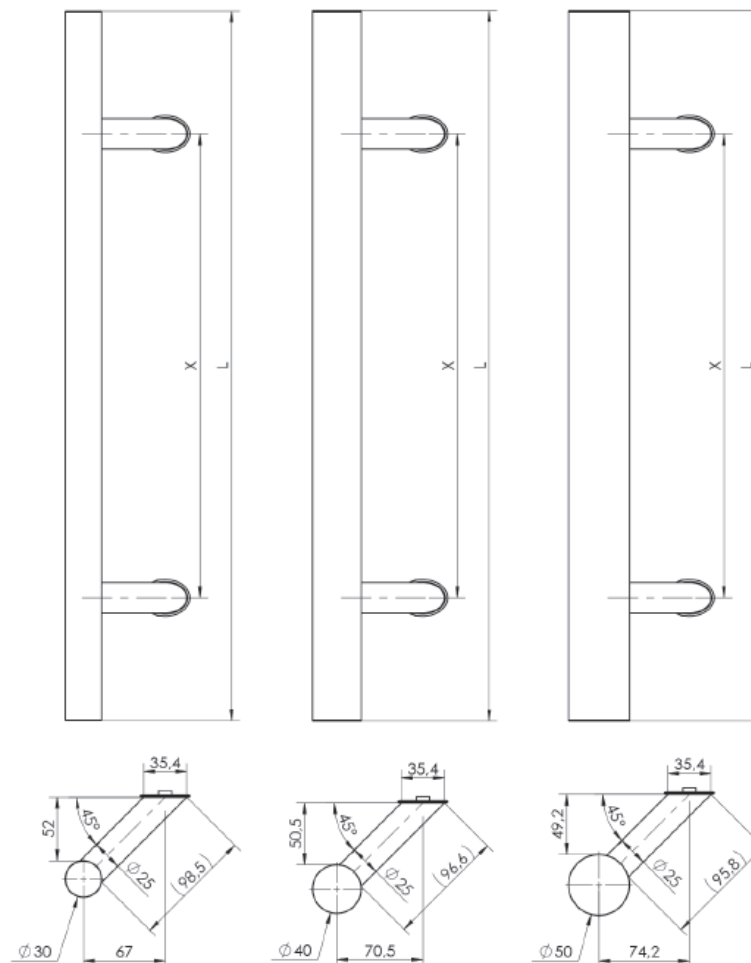

LENGTH L	HOLE SPACING X	304			316			ALUMINIUM	
		Ø30	Ø40	Ø50	Ø30	Ø40	Ø50	Ø30	Ø40
300 - 580	200 - 380	•	•	•	•	•	•	•	•
600	400	•	•	•	•	•	•	•	•
800 - 1000	600 - 800	•	•	•	•	•	•	•	•
1200 - 1400	1000 - 1200	•	•	•	•	•	•	•	•
1600	1200	•	•	•	•	•	•	•	•
1800	1300	•	•	•	•	•	•	•	•
2000 - 2200	1800 - 2000	•	•	•	•	•	•	•	•
max 2600	max 2300	•	•	•	•	•	•	L max 2600	
max 3500	max 3000	•	•	•	•	•	•	L max 2600	

• Product made for individual order
 • Product unavailable
 From L2300 in aluminium, 3 base recommended

P45D

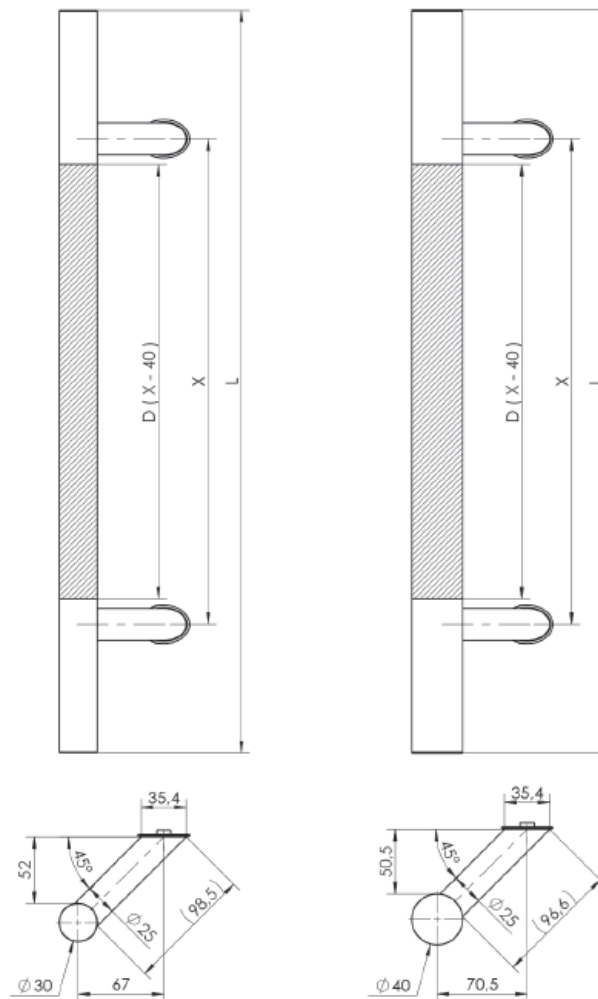

LENGTH L	HOLE SPACING X	304		316		ALUMINIUM	
		Ø30	Ø40	Ø30	Ø40	Ø30	Ø40
580 - 800	380 - 600	•	•	•	•	•	•
1200	1000	•	•	•	•	•	•
1600	1000	•	•	•	•	•	•
1600	1400	•	•	•	•	•	•


• Product made for individual order

◦ Product unavailable

The handle with the wooden baluster should be protected against rain and sun by inserting the door in recesses or using a roof above the door mounted in straight walls. The roof should shade the handle with the baluster at noon in the summer. It is recommended to carry out periodic care: 2-3 times a year. After wiping with a soft cloth moistened with water, protect the painting surface with a wood care agent (alkaline or solvent agents cannot be used for maintenance).

If the door does not have the required roofing, the handle will not be covered by the warranty.





During external and internal works of the building, the handle should be protected against dirt.

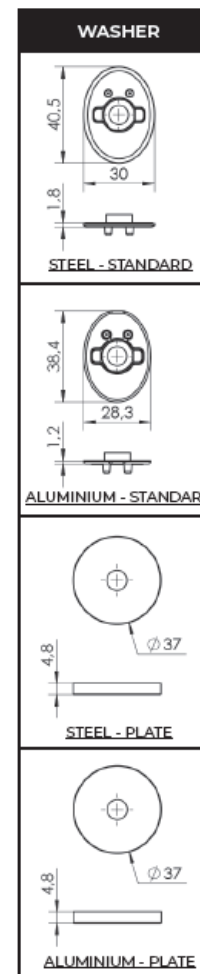

KN

MAIN MENU
MODERN HANDLES






P10B

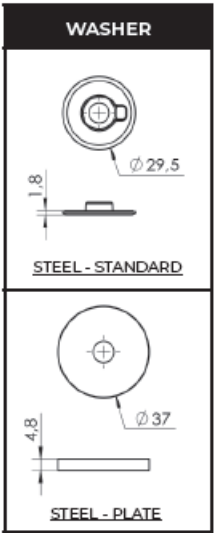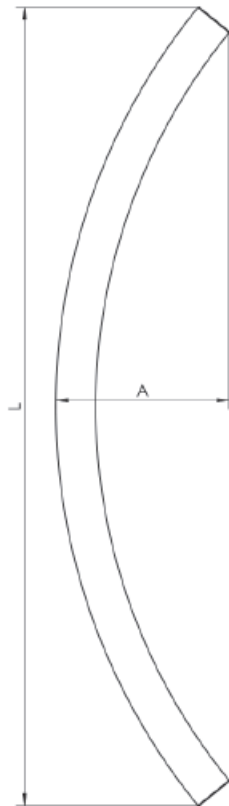

LENGTH L	HOLE SPACING X	$\varnothing 30$
560 - 1600	510 - 1200	•

- Product made for individual order
- Product unavailable

P45B

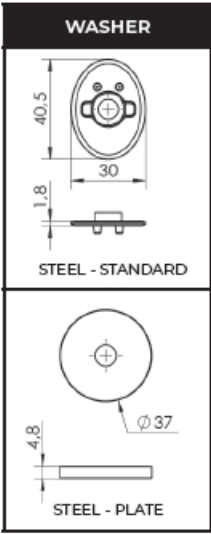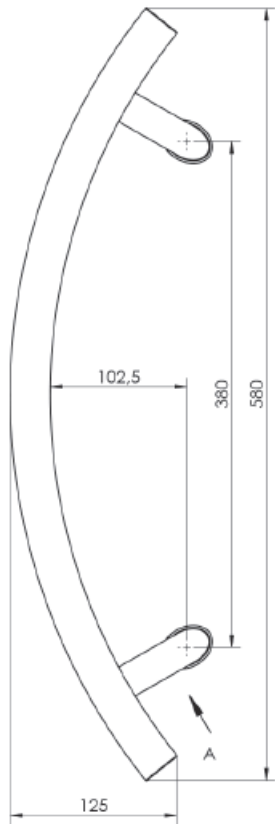



LENGTH L	HOLE SPACING X	Ø 30
580	380	•

• Product made for individual order
◦ Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)

P45L

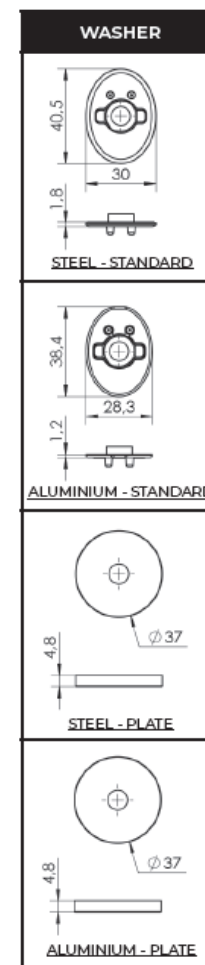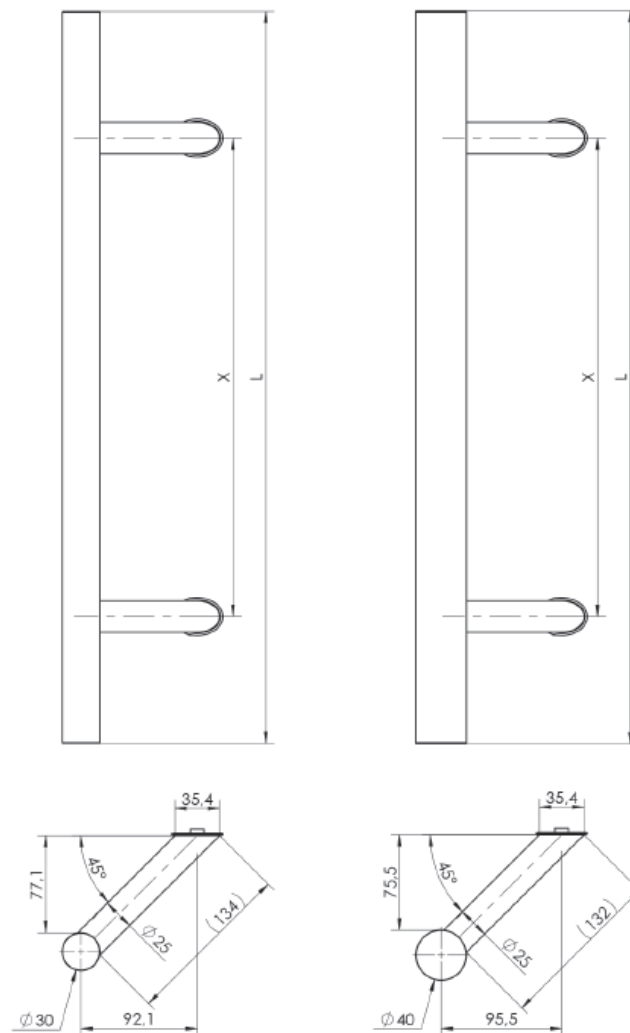





LENGTH L	HOLE SPACING X	304		316		ALUMINIUM	
		Ø30	Ø40	Ø30	Ø40	Ø30	Ø40
300 - 580	200 - 380	*	o	o	o	*	o
600	400	*	o	*	o	*	o
800 - 1000	600 - 800	*	o	*	o	*	*
1200 - 1400	1000 - 1200	*	*	o	o	*	*
1600	1200	*	*	o	*	*	*
1800	1300	*	*	o	o	o	*
2000 - 2200	1800 - 2000	o	*	o	*	o	*
max 2600	max 2300	o	*	o	*	o	*

• Product made for individual order
 o Product unavailable
 From L2300 in aluminium, 3 base recommended

KN

MAIN MENU
MODERN HANDLES

P60

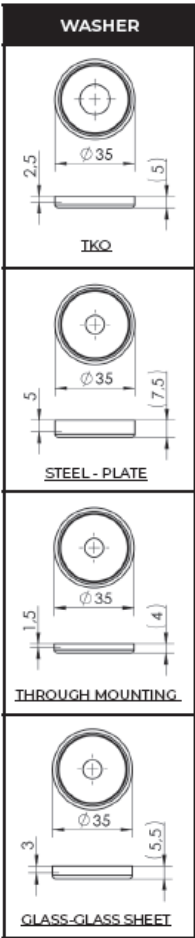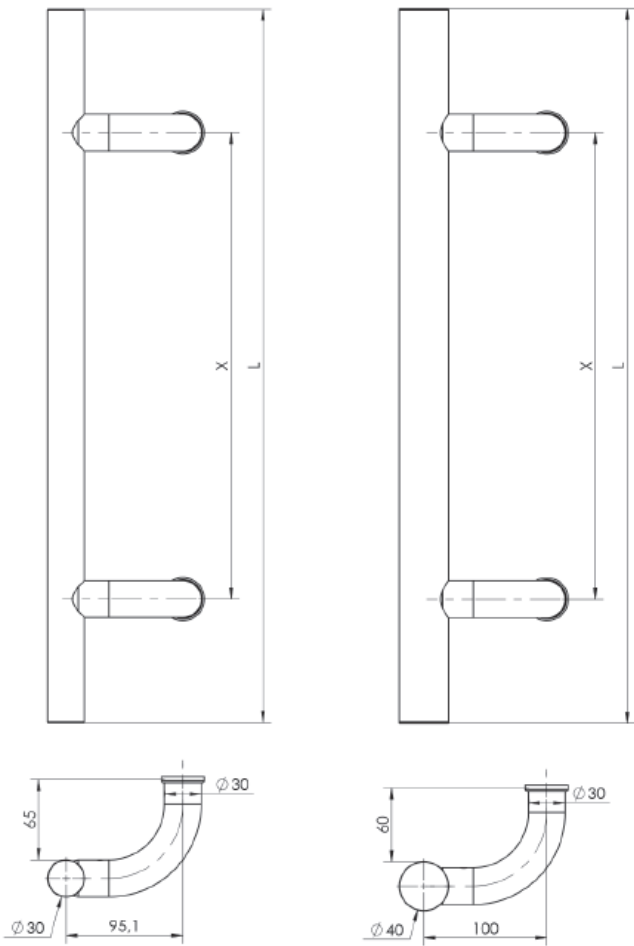







LENGTH L	HOLE SPACING X	304		ALUMINIUM
		Ø30	Ø40	Ø30
580 - 800	380 - 600	•	•	•
max 1200	max 1000	•	•	•
max 2500	max 2300	•	•	•

• Product made for individual order
• Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)

Q10

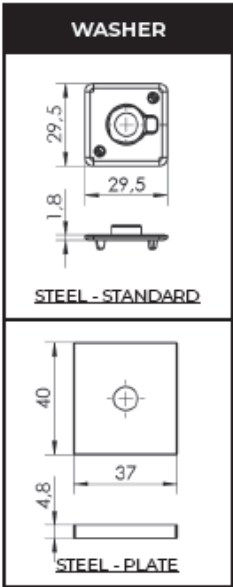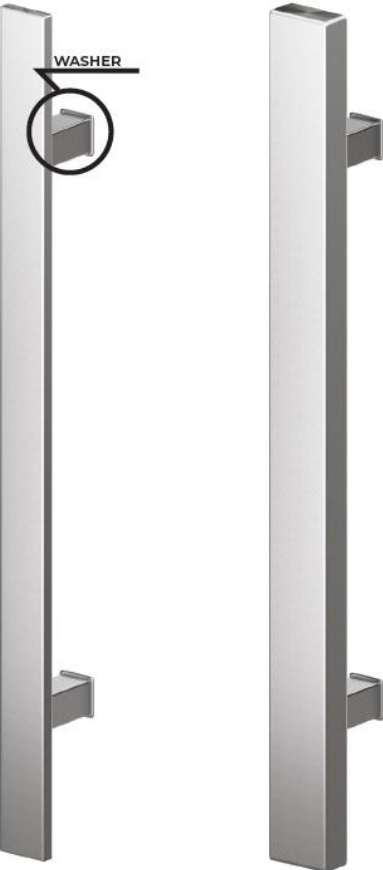





LENGTH L	HOLE SPACING X	304		316	
		40x10	50x25	40x10	50x25
300 - 400	200	•	◦	◦	◦
500 - 580	300 - 380	•	◦	•	◦
600 - 1000	400 - 800	•	•	•	◦
1200	1000	•	•	•	•
1400 - 1500	1200 - 1300	◦	•	◦	◦
1600	1400	◦	•	◦	•
1800	1600	◦	•	◦	•
2000 - 2200	1800 - 2000	◦	•	◦	◦
150 - 1200	X	•	•	•	•
max 2600	max 2300	◦	•	◦	•

• Product made for individual order
◦ Product unavailable

[MAIN MENU](#)
[MODERN HANDLES](#)



Q10 20-40

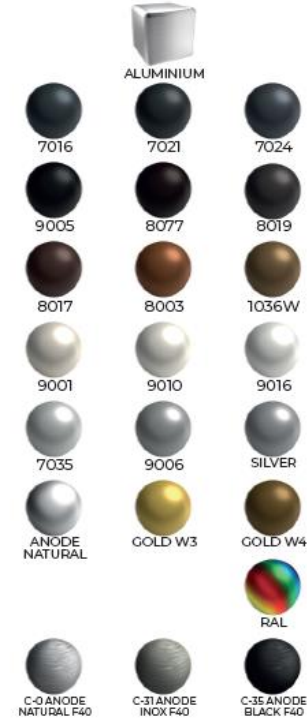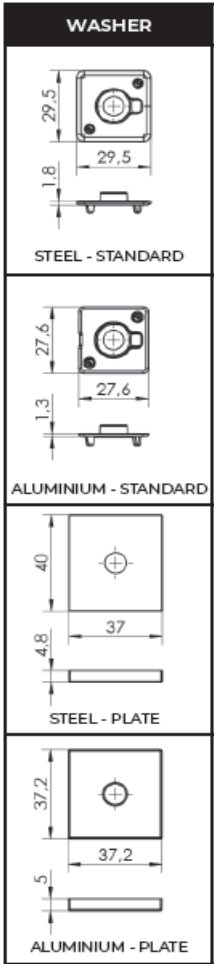
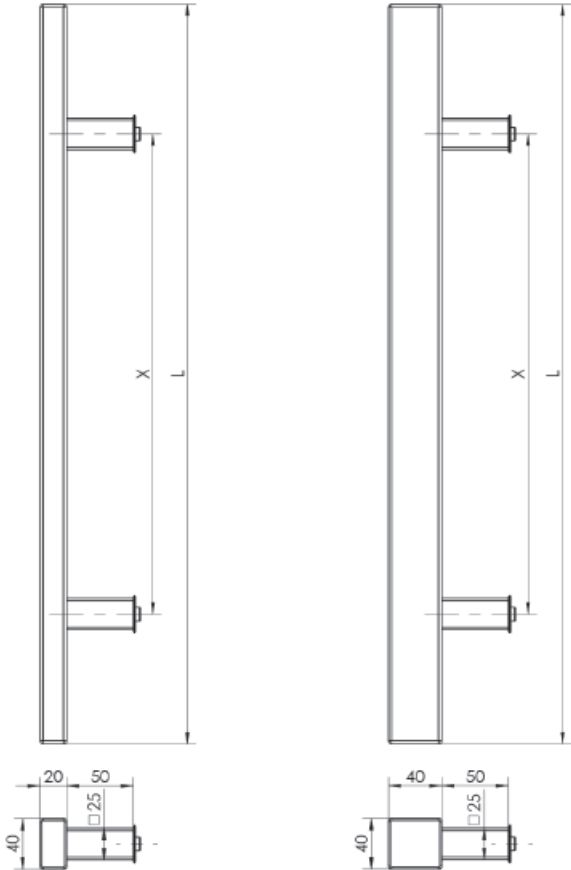
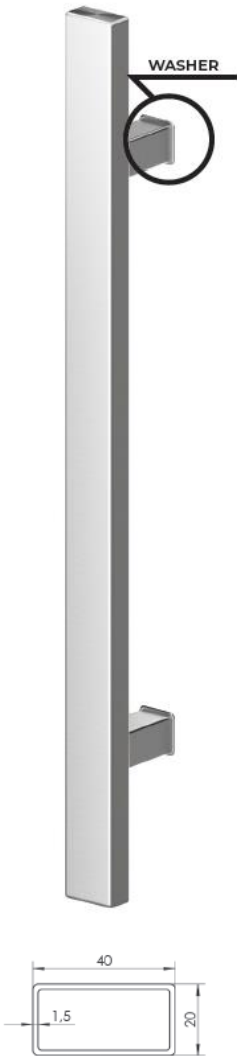


LENGTH L	HOLE SPACING X	304		316		ALUMINIUM	
		40x20	40x40	40x20	40x40	40x20	40x40
300 - 400	200	*	o	o	o	*	o
500 - 580	300 - 380	*	o	*	o	*	o
600	400	*	*	*	o	*	o
800 - 1000	600 - 800	*	*	*	o	*	*
1200	1000	*	*	*	*	*	*
1400 - 1500	1200 - 1300	*	*	o	o	*	*
1600	1200	o	o	o	o	*	*
1600	1300	*	o	o	o	o	o
1600	1400	o	*	o	*	o	o
1800	1300	*	o	o	o	o	*
1800	1600	o	*	o	*	o	o
2000	1600	o	o	o	o	o	*
2000 - 2200	1800 - 2000	o	*	o	o	o	o
max 2600	max 2300	o	*	o	o	o	o



[MAIN MENU](#)
[MODERN HANDLES](#)

Q10D

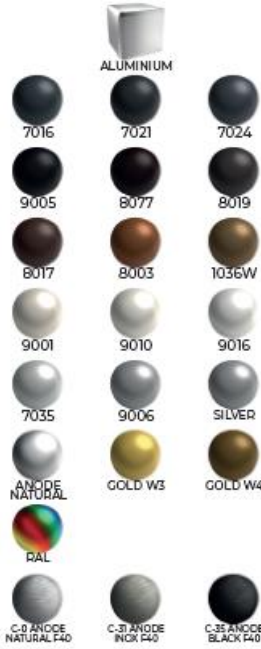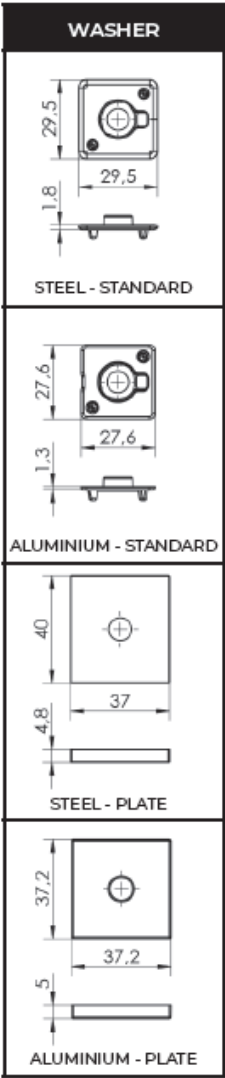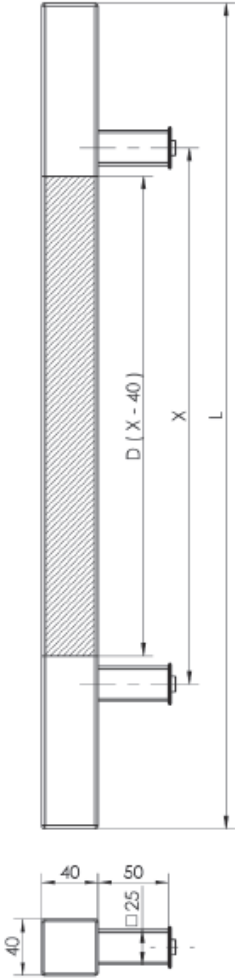

LENGTH L	HOLE SPACING X	304	316	ALUMINIUM
		40x40	40x40	40x40
1000	800	•	•	•
1200	1000	•	•	•
1600	1400	•	•	•

- Product made for individual order
- Product unavailable

The handle with the wooden baluster should be protected against rain and sun by inserting the door in recesses or using a roof above the door mounted in straight walls. The roof should shade the handle with the baluster at noon in the summer. It is recommended to carry out periodic care: 2-3 times a year. After wiping with a soft cloth moistened with water, protect the painting surface with a wood care agent (alkaline or solvent agents cannot be used for maintenance).



If the door does not have the required roofing, the handle will not be covered by the warranty.

During external and internal works of the building, the handle should be protected against dirt.



[MAIN MENU](#)
[MODERN HANDLES](#)

Q10RX



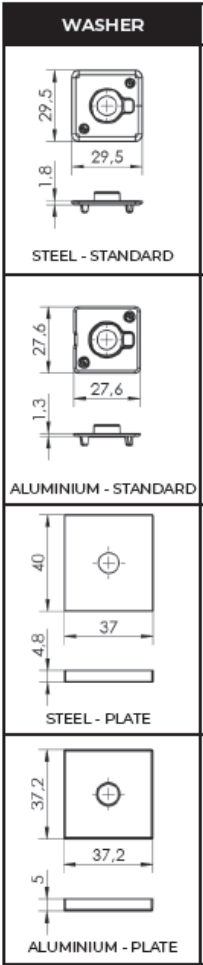
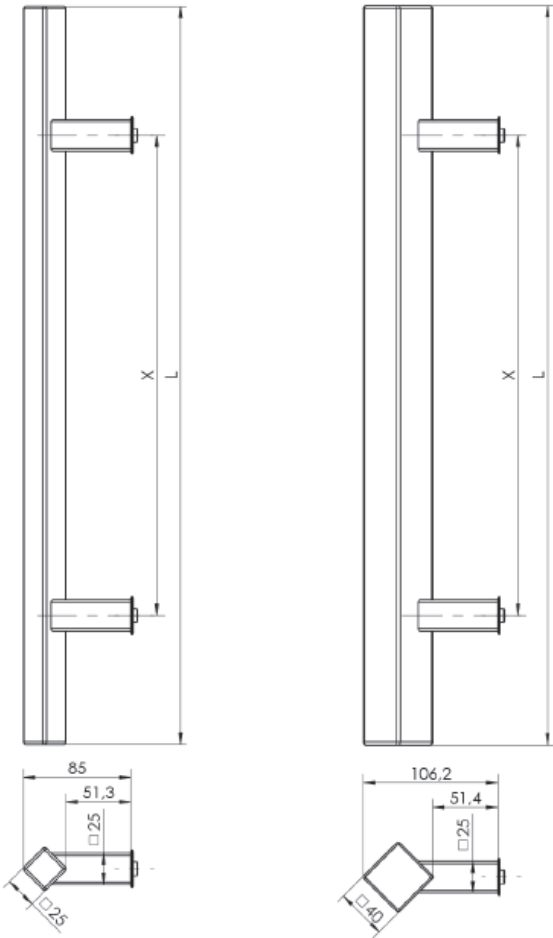


LENGTH L	HOLE SPACING X	304		316		ALUMINIUM	
		25x25	40x40	25x25	40x40	25x25	40x40
300 - 400	200	•	•	•	•	•	•
500 - 580	300 - 380	•	•	•	•	•	•
600	400	•	•	•	•	•	•
800 - 1000	600 - 800	•	•	•	•	•	•
1200	1000	•	•	•	•	•	•
1400 - 1500	1200 - 1300	•	•	•	•	•	•
1600	1200	•	•	•	•	•	•
1600	1300	•	•	•	•	•	•
1600	1400	•	•	•	•	•	•
1800	1300	•	•	•	•	•	•
1800	1600	•	•	•	•	•	•
2000	1600	•	•	•	•	•	•
2000 - 2200	1800 - 2000	•	•	•	•	•	•
max 2600	max 2300	•	•	•	•	•	•



[MAIN MENU](#)
[MODERN HANDLES](#)

Q10RXD

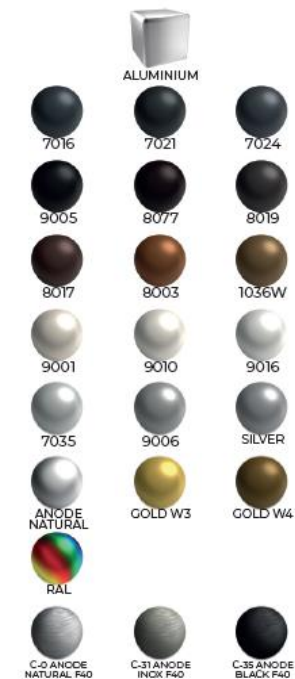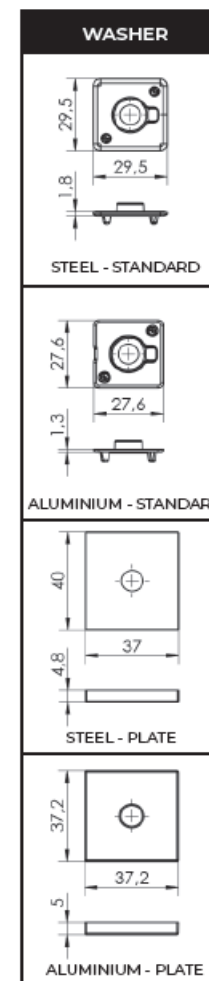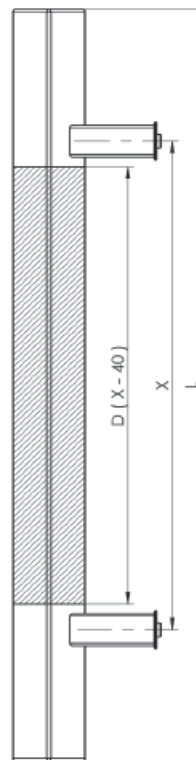

LENGTH L	HOLE SPACING X	304	316	ALUMINIUM
		40x40	40x40	40x40
1000	800	•	•	•
1200	1000	•	•	•
1600	1400	•	•	•

- Product made for individual order
- Product unavailable

The handle with the wooden baluster should be protected against rain and sun by inserting the door in recesses or using a roof above the door mounted in straight walls. The roof should shade the handle with the baluster at noon in the summer. It is recommended to carry out periodic care: 2-3 times a year. After wiping with a soft cloth moistened with water, protect the painting surface with a wood care agent (alkaline or solvent agents cannot be used for maintenance).


If the door does not have the required roofing, the handle will not be covered by the warranty.

During external and internal works of the building, the handle should be protected against dirt.



MAIN MENU
MODERN HANDLES

Q45 10-25

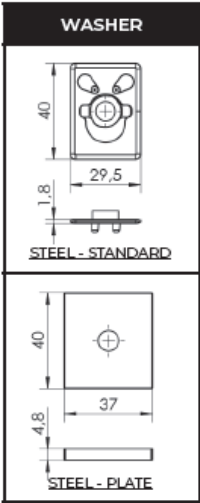



LENGTH L	HOLE SPACING X	304		316	
		40x10	50x25	40x10	50x25
300 - 400	200	•	◦	◦	◦
500 - 580	300 - 380	•	◦	•	◦
600 - 1000	400 - 800	•	•	•	◦
1200	1000	•	•	•	•
1400 - 1500	1200 - 1300	◦	•	◦	◦
1600	1400	◦	•	◦	•
1800	1600	◦	•	◦	•
2000 - 2200	1800 - 2000	◦	•	◦	◦
150 - 1200	X	•	•	•	•
max 2600	max 2300	◦	•	◦	•

• Product made for individual order
◦ Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)

Q45 20-40


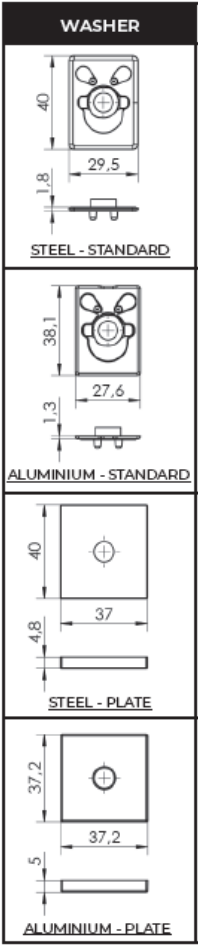
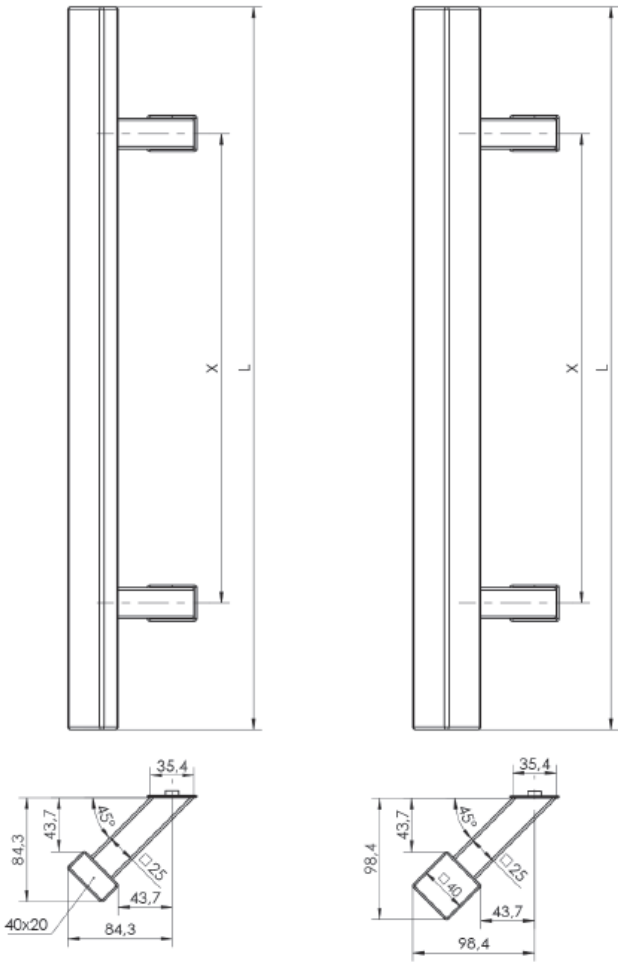


LENGTH L	HOLE SPACING X	304		316		ALUMINIUM	
		40x20	40x40	40x20	40x40	40x20	40x40
300 - 400	200	•	•	•	•	•	•
500 - 580	300 - 380	•	•	•	•	•	•
600	400	•	•	•	•	•	•
800 - 1000	600 - 800	•	•	•	•	•	•
1200	1000	•	•	•	•	•	•
1400 - 1500	1200 - 1300	•	•	•	•	•	•
1600	1200	•	•	•	•	•	•
1600	1300	•	•	•	•	•	•
1600	1400	•	•	•	•	•	•
1800	1300	•	•	•	•	•	•
1800	1600	•	•	•	•	•	•
2000	1600	•	•	•	•	•	•
2000 - 2200	1800 - 2000	•	•	•	•	•	•
max 2600	max 2300	•	•	•	•	•	•



[MAIN MENU](#)
[MODERN HANDLES](#)

Q45D

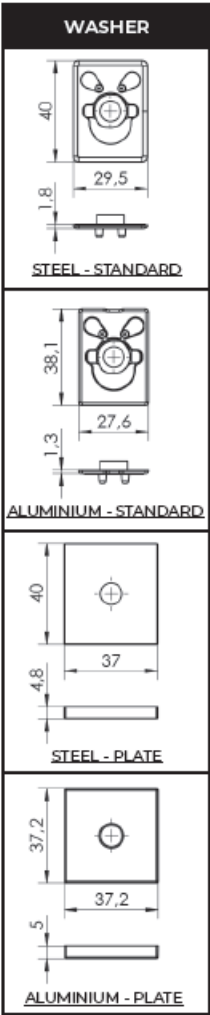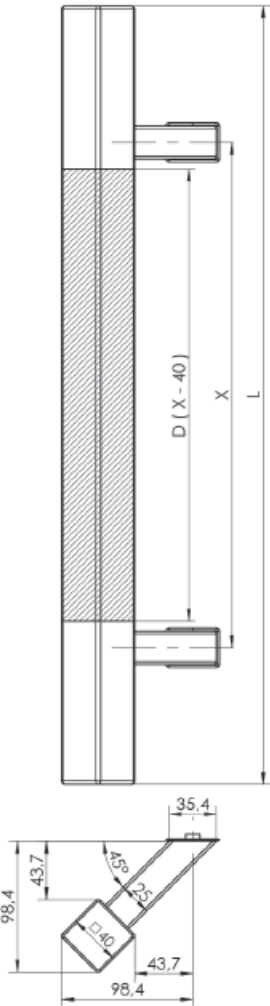

LENGTH L	HOLE SPACING X	304	316	ALUMINIUM
		40x40	40x40	40x40
1000	800	•	•	•
1200	1000	•	•	•
1600	1400	•	•	•

- Product made for individual order
- Product unavailable



The handle with the wooden baluster should be protected against rain and sun by inserting the door in recesses or using a roof above the door mounted in straight walls. The roof should shade the handle at noon in the summer. It is recommended to carry out periodic care: 2-3 times a year. After wiping with a soft cloth moistened with water, protect the painting surface with a wood care agent (alkaline or solvent agents cannot be used for maintenance).

If the door does not have the required roofing, the handle will not be covered by the warranty.
During external and internal works of the building, the handle should be protected against dirt.



[MAIN MENU](#)
[MODERN HANDLES](#)




Q45RX 25

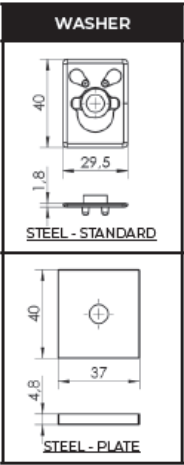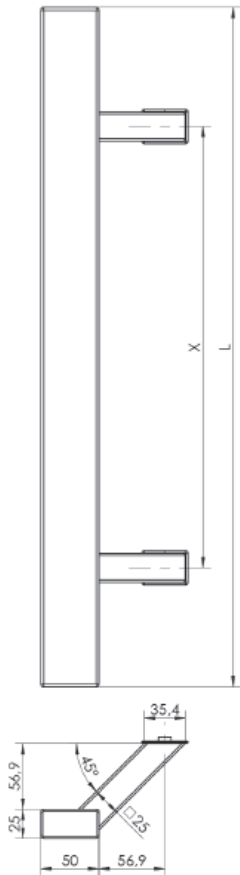

LENGTH L	HOLE SPACING X	304	316
		50x25	50x25
600 - 1000	400 - 800	•	◦
1200	1000	•	•
1400 - 1500	1200 - 1300	•	◦
1600	1400	•	•
1800	1600	•	•
2000 - 2200	1800 - 2000	•	◦
max 2600	max 2000	•	•

• Product made for individual order
◦ Product unavailable

Q45RX 20-40

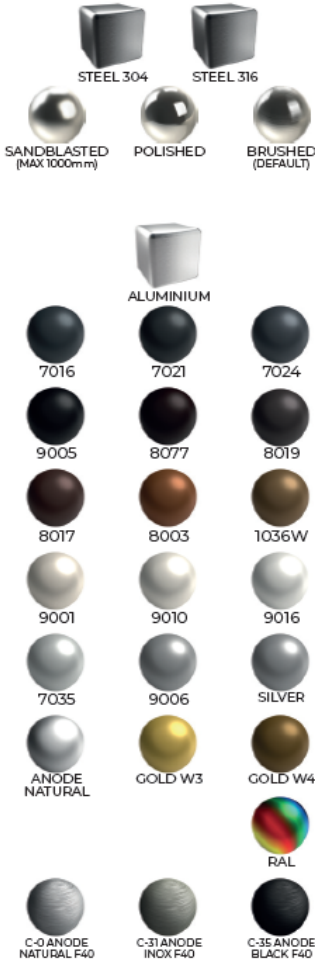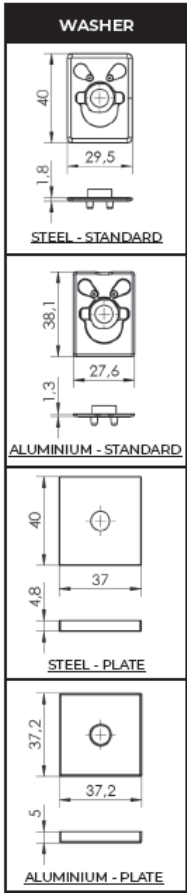
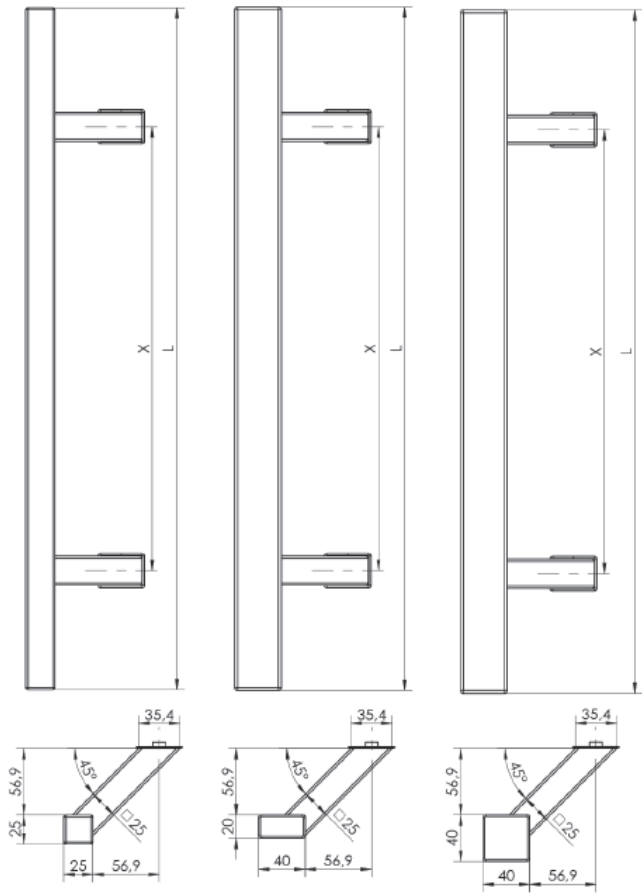


LENGTH L	HOLE SPACING X	304			316			ALUMINIUM		
		25x25	40x20	40x40	25x25	40x20	40x40	25x25	40x20	40x40
300 - 400	200	*	*	o	o	o	o	*	*	o
500 - 580	300 - 380	*	*	o	*	*	o	*	*	o
600	400	*	*	*	*	*	o	*	*	o
800 - 1000	600 - 800	*	*	*	*	*	o	*	*	*
1200	1000	*	*	*	*	*	*	*	*	*
1400 - 1500	1200 - 1300	*	*	*	o	o	o	o	*	*
1600	1200	o	o	o	o	o	o	o	*	*
1600	1300	*	*	o	o	o	o	o	o	o
1600	1400	o	o	*	o	o	*	o	o	o
1800	1300	*	*	o	o	o	o	o	o	*
1800	1600	o	o	*	o	o	*	o	o	o
2000	1600	o	o	o	o	o	o	o	o	*
2000 - 2200	1800 - 2000	o	o	*	o	o	o	o	o	o
max 2600	max 2300	o	o	*	o	o	o	o	o	o



[MAIN MENU](#)
[MODERN HANDLES](#)

Q45RXD

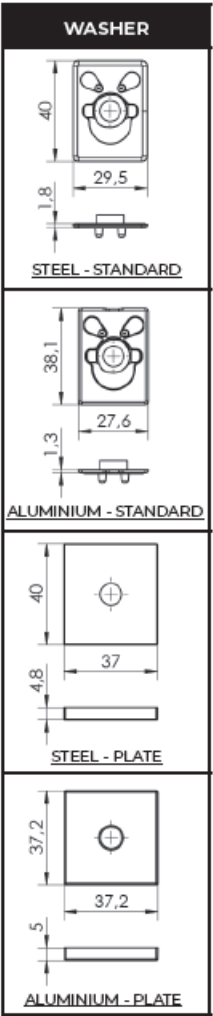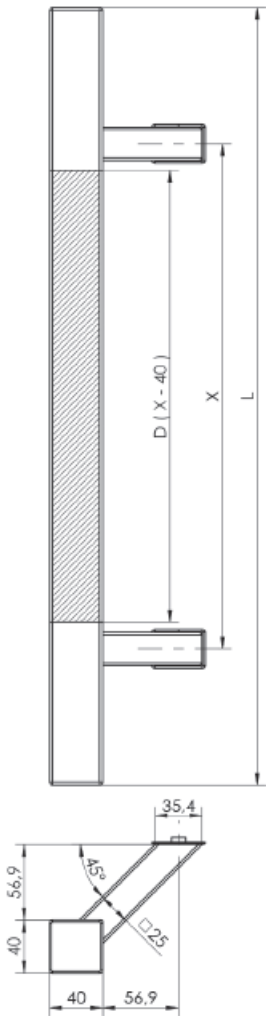

LENGTH L	HOLE SPACING X	304	316	ALUMINIUM
		40x40	40x40	40x40
1000	800	•	•	•
1200	1000	•	•	•
1600	1400	•	•	•

• Product made for individual order

◦ Product unavailable

The handle with the wooden baluster should be protected against rain and sun by inserting the door in recesses or using a roof above the door mounted in straight walls. The roof should shade the handle with the baluster at noon in the summer.

It is recommended to carry out periodic care: 2-3 times a year. After wiping with a soft cloth moistened with water, protect the painting surface with a wood care agent (alkaline or solvent agents cannot be used for maintenance).

If the door does not have the required roofing, the handle will not be covered by the warranty.



During external and internal works of the building, the handle should be protected against dirt.



[MAIN MENU](#)

[MODERN HANDLES](#)

Q60



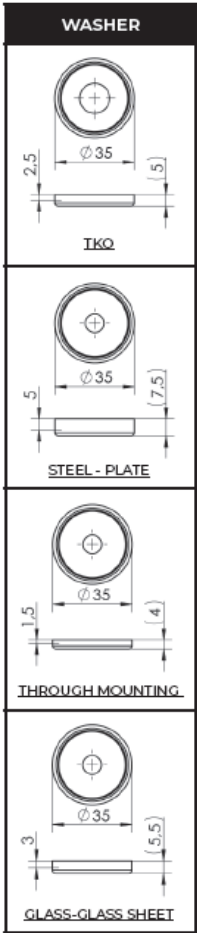
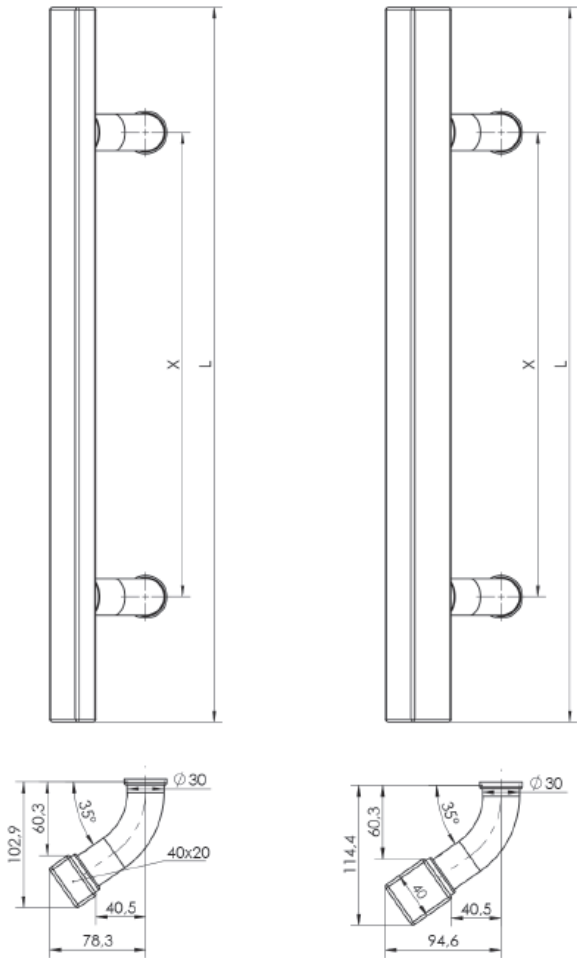


LENGTH L	HOLE SPACING X	304		316	
		40x20	40x40	40x20	40x40
580	380	•	•	•	•
800	600	•	•	•	•
150 - 1200	x	•	•	•	•
max 2500	max 2300	•	•	•	•

• Product made for individual order
◦ Product unavailable



Q90

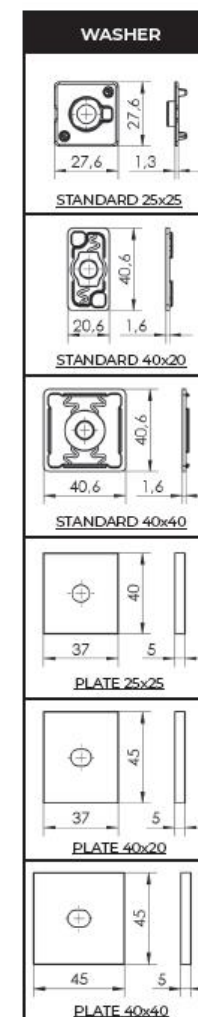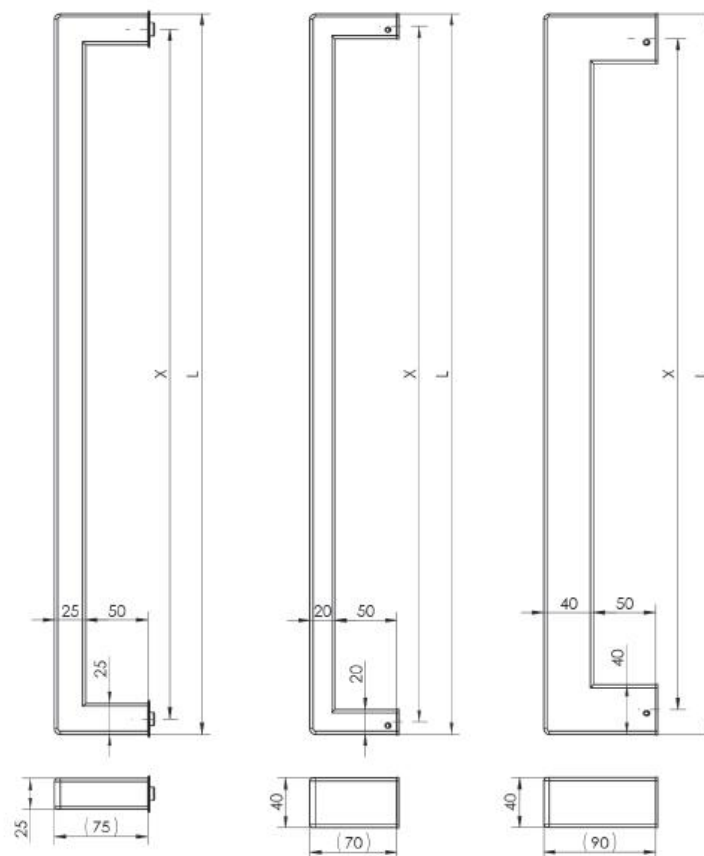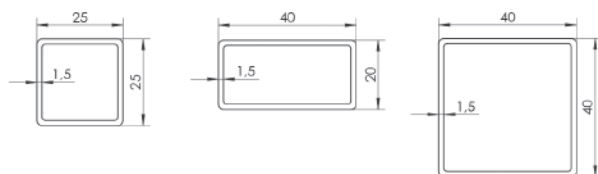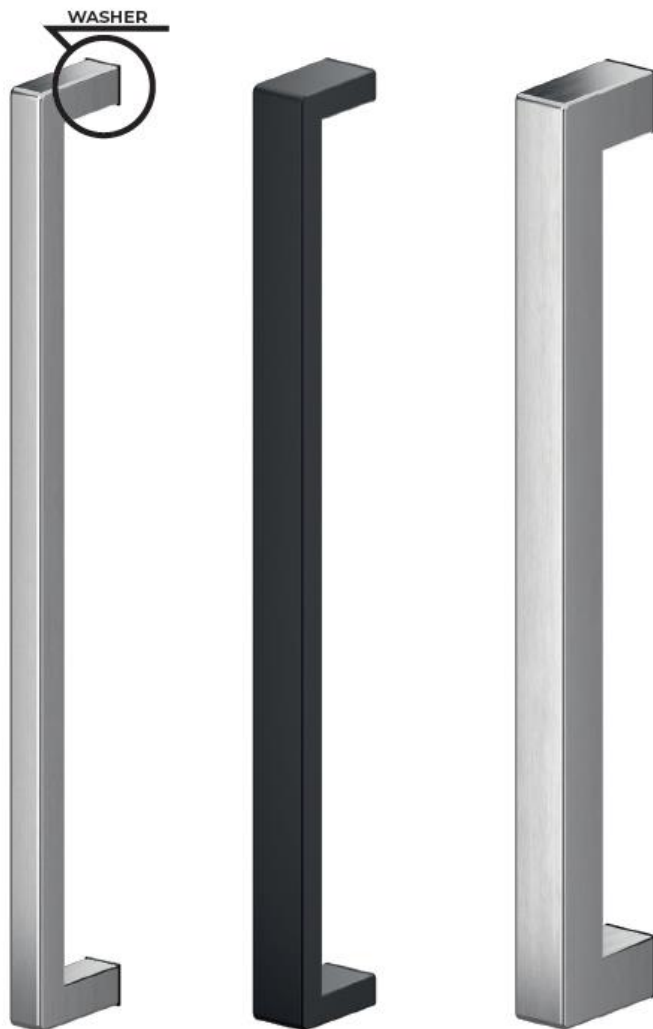






LENGTH L	304			316			ALUMINIUM		
	25x25	40x20	40x40	25x25	40x20	40x40	25x25	40x20	40x40
300 - 580	•	•	•	•	•	•	•	•	•
600 - 1200	•	•	•	•	•	•	•	•	•
1400 - 2300	•	•	•	•	•	•	•	•	•
2301 - 2500	•	•	•	•	•	•	•	•	•
HOLE SPACING X	L-25	L-20	L-40	L-25	L-20	L-40	L-25	L-20	L-40

• Product made for individual order
 • Product unavailable

KN

MAIN MENU
MODERN HANDLES

Q90D

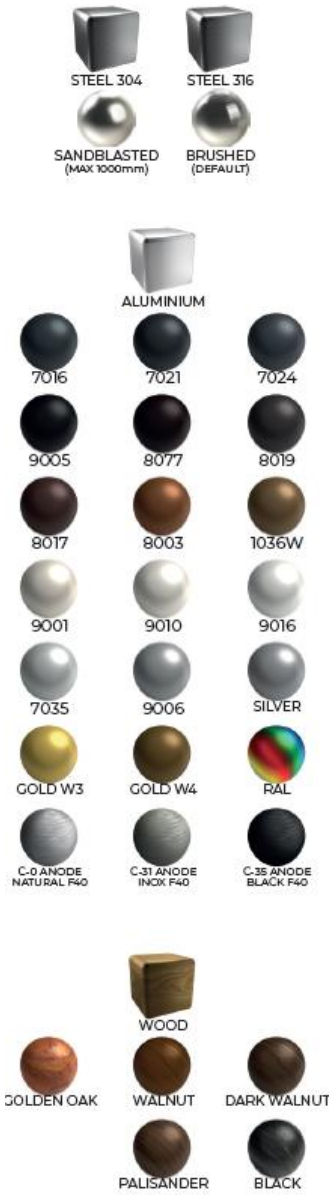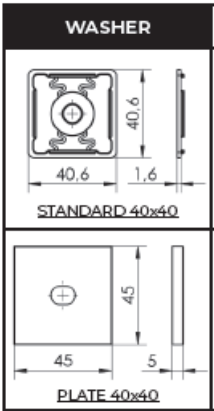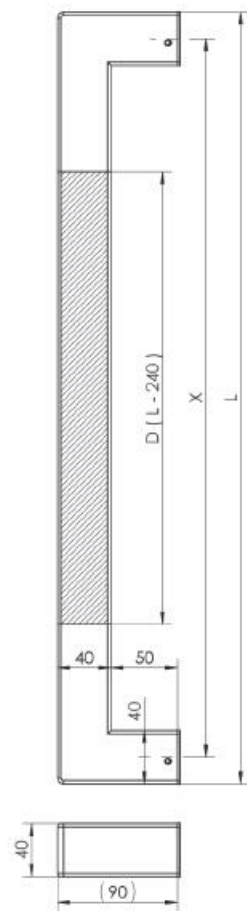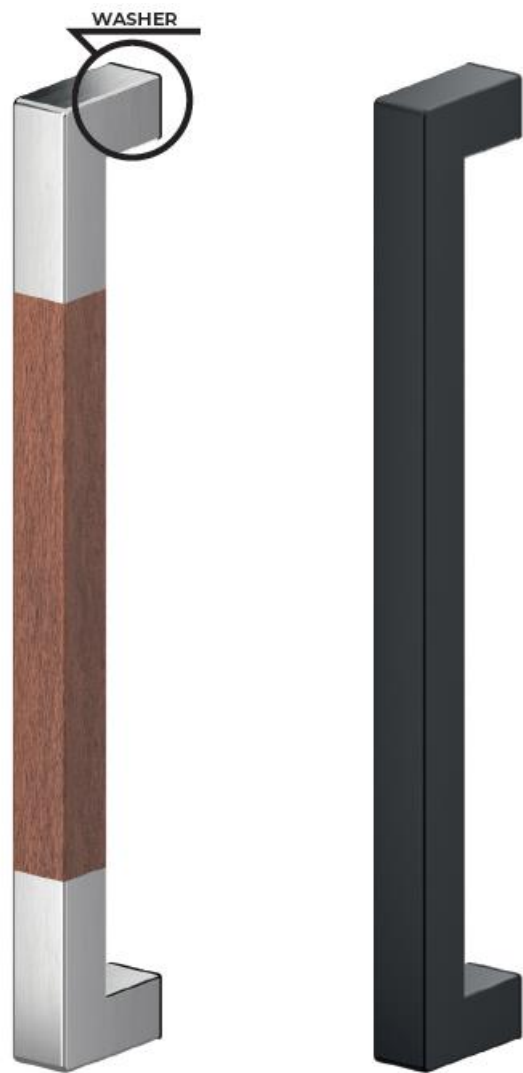

LENGTH L	HOLE SPACING X	WOODEN PART D	304	316	ALUMINIUM
			40x40	40x40	40x40
800	760	560	•	•	•
1000	960	760	•	•	•
1200	1160	960	•	•	•
1600	1560	1360	•	•	•

• Product made for individual order
◦ Product unavailable

The handle with the wooden baluster should be protected against rain and sun by inserting the door in recesses or using a roof above the door mounted in straight walls. The roof should shade the handle with the baluster at noon in the summer. It is recommended to carry out periodic care: 2-3 times a year. After wiping with a soft cloth moistened with water, protect the painting surface with a wood care agent (alkaline or solvent agents cannot be used for maintenance).



If the door does not have the required roofing, the handle will not be covered by the warranty.

During external and internal works of the building, the handle should be protected against dirt.



[MAIN MENU](#)
[MODERN HANDLES](#)

Q90C

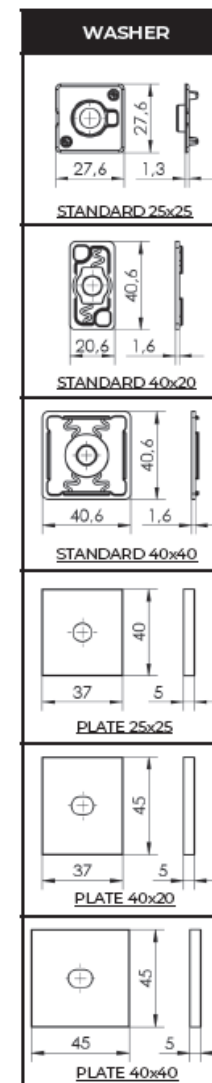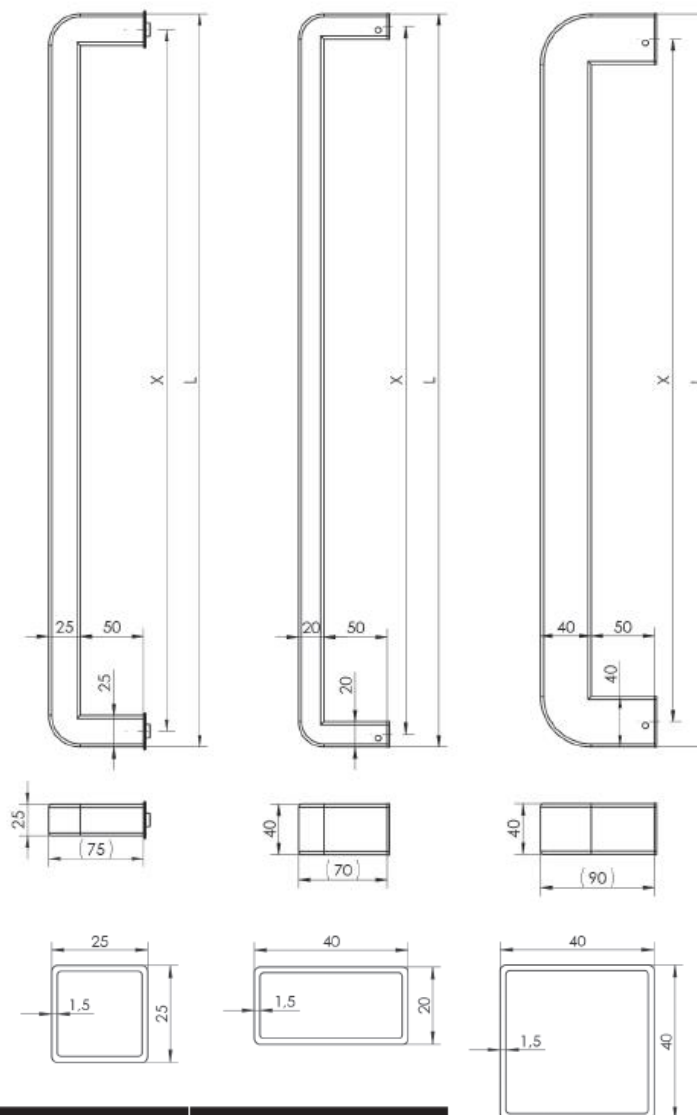





LENGTH L	304			316			ALUMINIUM		
	25x25	40x20	40x40	25x25	40x20	40x40	25x25	40x20	40x40
300 - 580	•	•	•	•	•	•	•	•	•
600 - 1200	•	•	•	•	•	•	•	•	•
1400 - 2300	•	•	•	•	•	•	•	•	•
2301 - 2500	•	•	•	•	•	•	•	•	•
HOLE SPACING X	L-25	L-20	L-40	L-25	L-20	L-40	L-25	L-20	L-40

• Product made for individual order
 • Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)

Q90CD

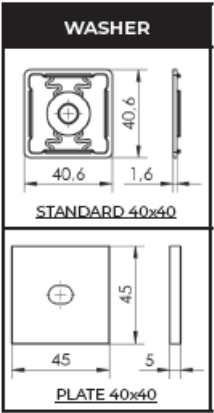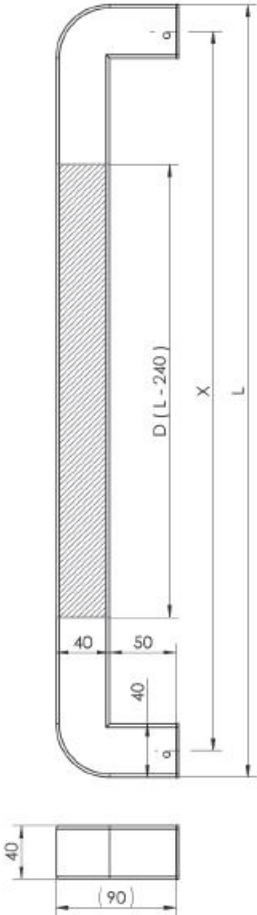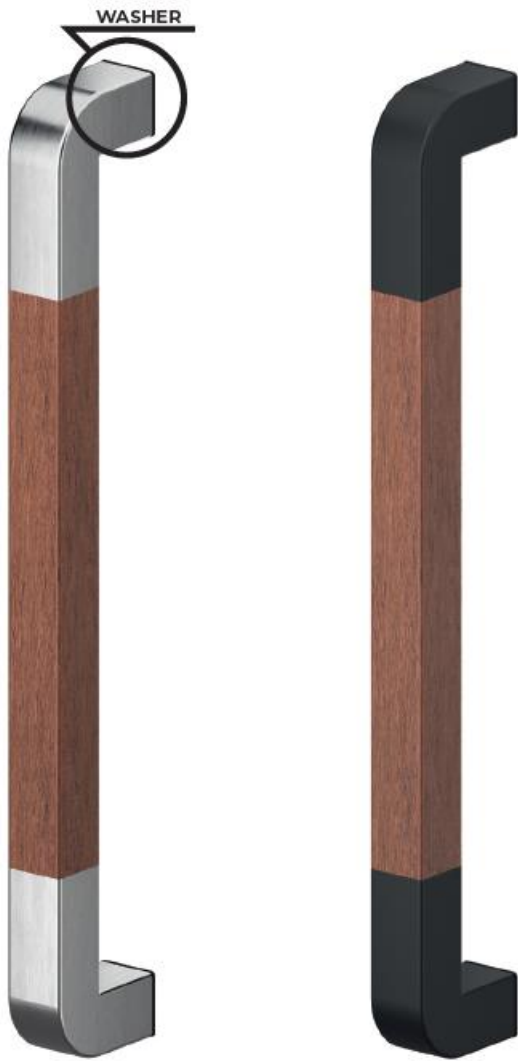

LENGTH L	HOLE SPACING X	WOODEN PART D	304	316	ALUMINIUM
			40x40	40x40	40x40
800	760	560	•	•	•
1000	960	760	•	•	•
1200	1160	960	•	•	•
1600	1560	1360	•	•	•

• Product made for individual order
◦ Product unavailable

The handle with the wooden baluster should be protected against rain and sun by inserting the door in recesses or using a roof above the door mounted in straight walls. The roof should shade the handle with the baluster at noon in the summer. It is recommended to carry out periodic care: 2-3 times a year. After wiping with a soft cloth moistened with water, protect the painting surface with a wood care agent (alkaline or solvent agents cannot be used for maintenance).








If the door does not have the required roofing, the handle will not be covered by the warranty.

During external and internal works of the building, the handle should be protected against dirt.



[MAIN MENU](#)
[MODERN HANDLES](#)





Q135

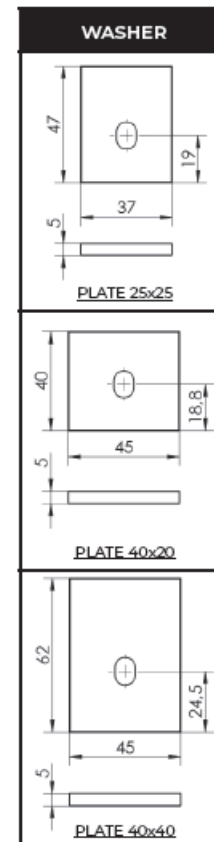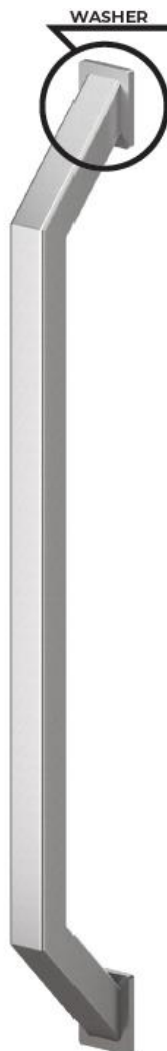

LENGTH L	304			316			ALUMINIUM		
	25x25	40x20	40x40	25x25	40x20	40x40	25x25	40x20	40x40
300 - 580	•	•	•	•	•	•	•	•	•
600 - 1200	•	•	•	•	•	•	•	•	•
1400 - 2300	•	•	•	•	•	•	•	•	•
2301 - 2500	•	•	•	•	•	•	•	•	•
HOLE SPACING X	L-45	L-35	L-70	L-45	L-35	L-70	L-45	L-35	L-70

• Product made for individual order
 • Product unavailable

Q135D

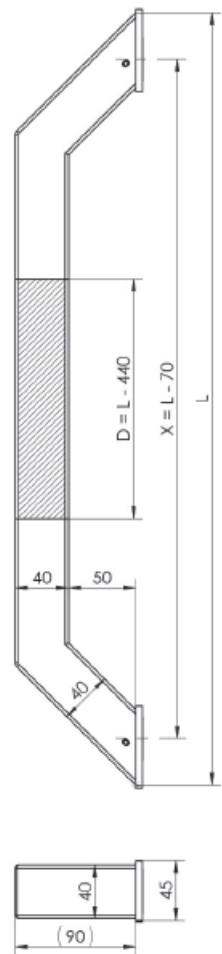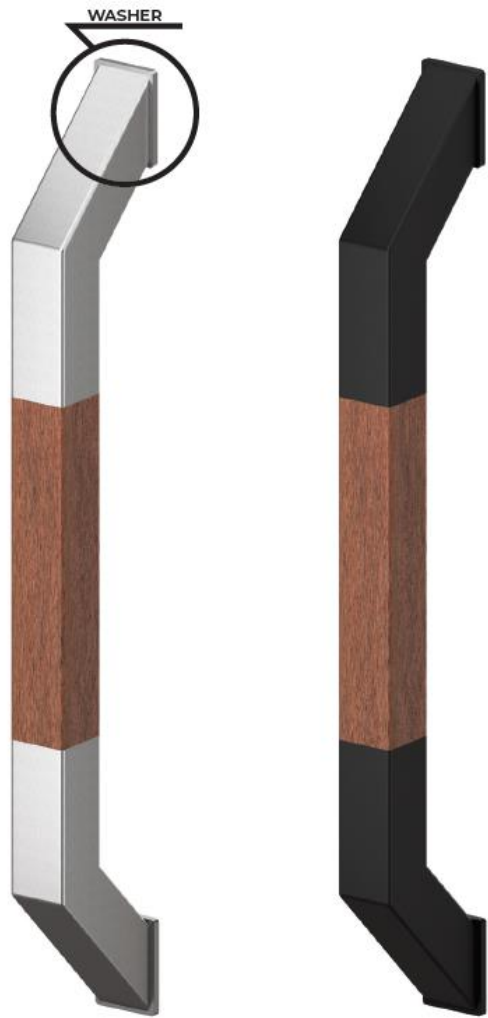

LENGTH L	HOLE SPACING X	WOODEN PART D	304	316	ALUMINIUM
			40x40	40x40	40x40
800	730	360	•	•	•
1000	930	560	•	•	•
1200	1130	760	•	•	•
1600	1530	1160	•	•	•

• Product made for individual order

◦ Product unavailable

The handle with the wooden baluster should be protected against rain and sun by inserting the door in recesses or using a roof above the door mounted in straight walls. The roof should shade the handle with the baluster at noon in the summer.

It is recommended to carry out periodic care: 2-3 times a year. After wiping with a soft cloth moistened with water, protect the painting surface with a wood care agent (alkaline or solvent agents cannot be used for maintenance).

If the door does not have the required roofing, the handle will not be covered by the warranty.



During external and internal works of the building, the handle should be protected against dirt.

[MAIN MENU](#)

[MODERN HANDLES](#)



Q5

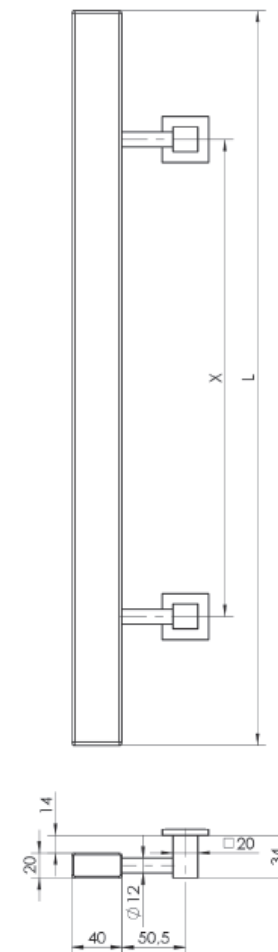

Q5				
LENGTH L	304		316	
	40x20	40x40	40x20	40x40
150 - 580	•	◦	•	◦
581 - 1200	•	•	•	•
1201 - 2500	◦	•	◦	•

• Product made for individual order
◦ Product unavailable





Q5 -FR		
LENGTH L	304	316
	40x20	40x20
150 - 580	•	•
581 - 1200	•	•

• Product made for individual order
◦ Product unavailable

KN

MAIN MENU
MODERN HANDLES

Q10X

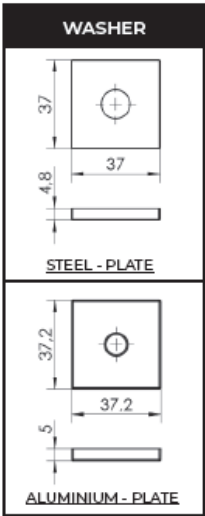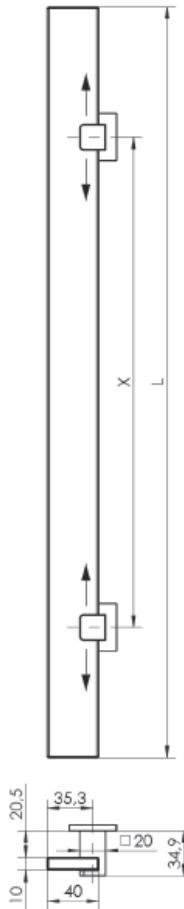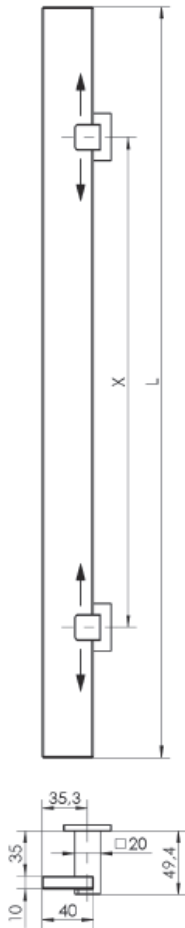



LENGTH L	HOLE SPACING X	304	316	ALUMINIUM
		40x10	40x10	40x10
500	Bases can be freely moved and adjusted as required.	•	•	•
600		•	•	•
800		•	•	•
1000		•	•	•
1200	It is also possible to connect them and use different colours.	•	•	•
1400 (3 base)		•	•	•
1600 (3 base)		•	•	•
1800 (3 base)		•	•	•

• Product made for individual order
◦ Product unavailable


[MAIN MENU](#)
[MODERN HANDLES](#)









Q45X

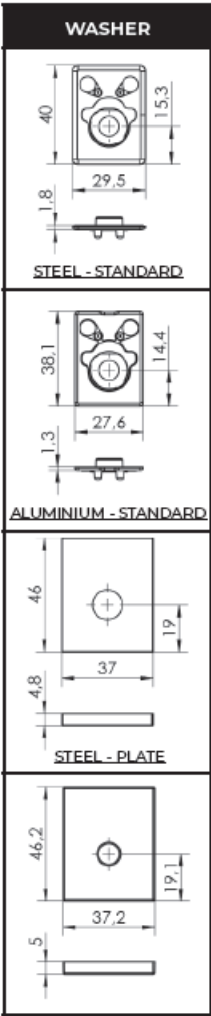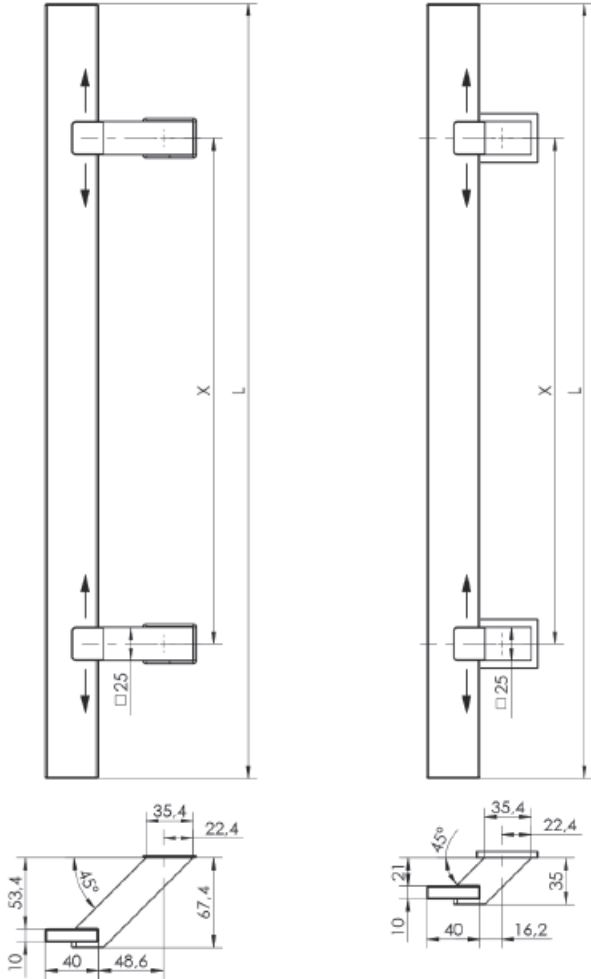

LENGTH L	HOLE SPACING X	304	316	ALUMINIUM
		40x10	40x10	40x10
500	Bases can be freely moved and adjusted as required.	•	•	•
600		•	•	•
800		•	•	•
1000		•	•	•
1200	It is also possible to connect them and use different colours.	•	•	•
1400 (3 base)		•	•	•
1600 (3 base)		•	•	•
1800 (3 base)		•	•	•



Q10ZX

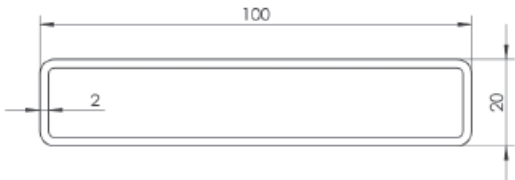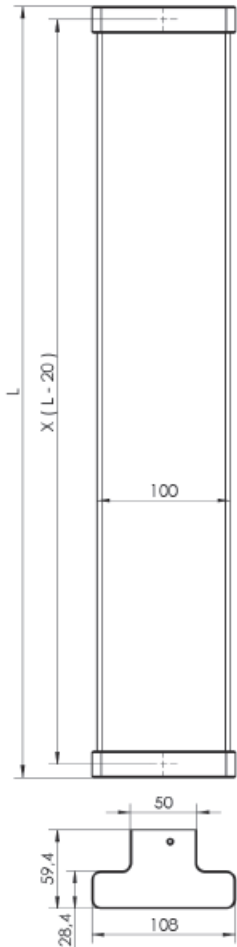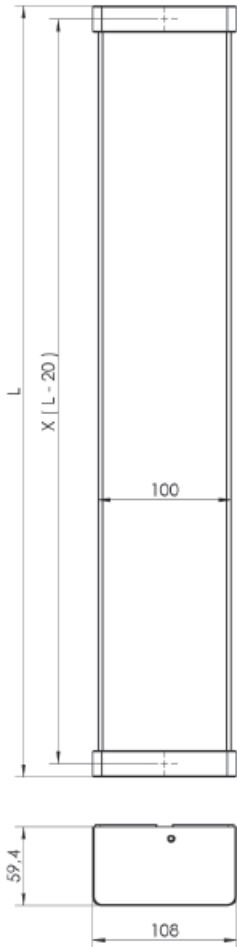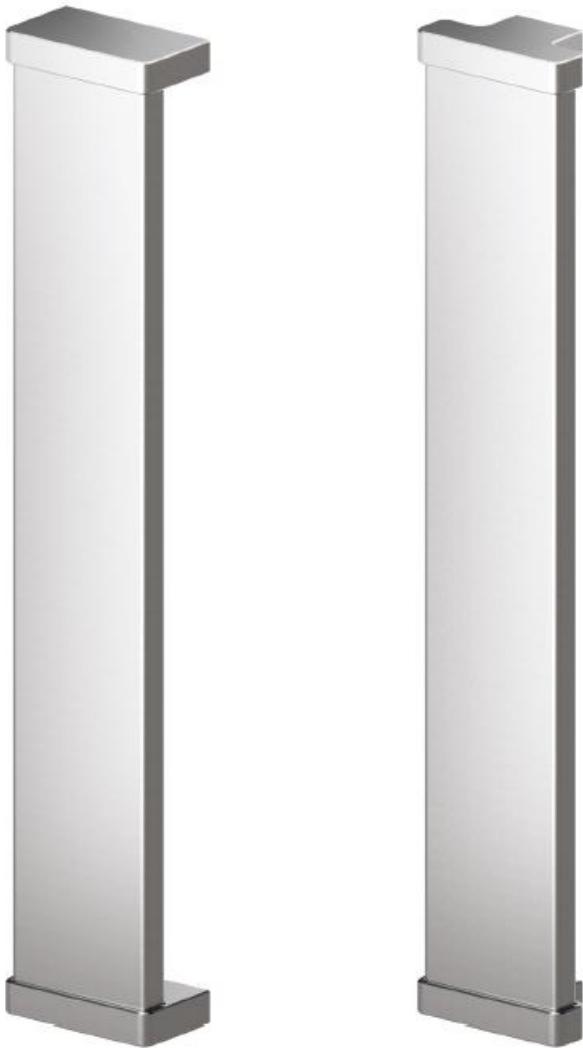

LENGTH L	HOLE SPACING X	304
		100x20
1200	L - 20	•
1600		•
1800		•
2000		•
2200		•
2400		•
2600		•
2800		•
3000		•




• Product made for individual order
◦ Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)



Q10B

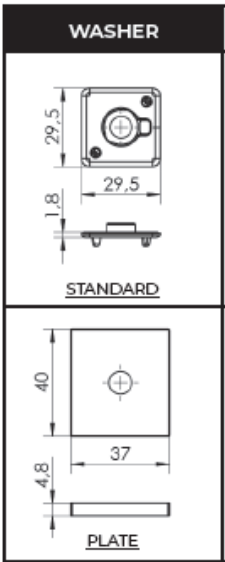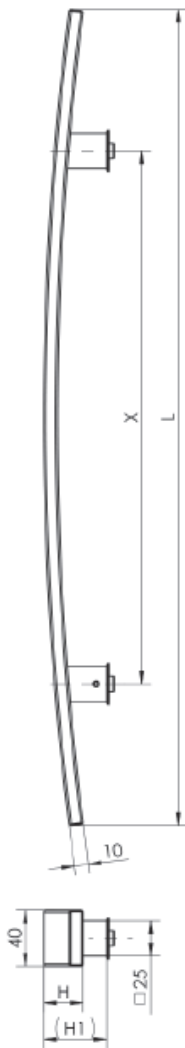



LENGTH L	HOLE SPACING X	H	H1	304	316
				40x10	40x10
600	300	40	46	•	•
1200	900	46	59	•	•
1800	1500 (3 base)	54	69	•	•

• Product made for individual order
◦ Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)





Q45P

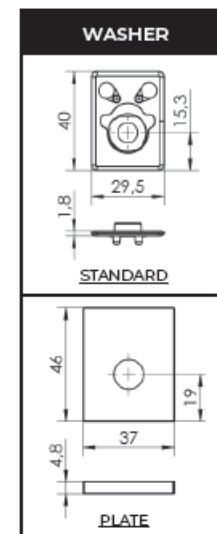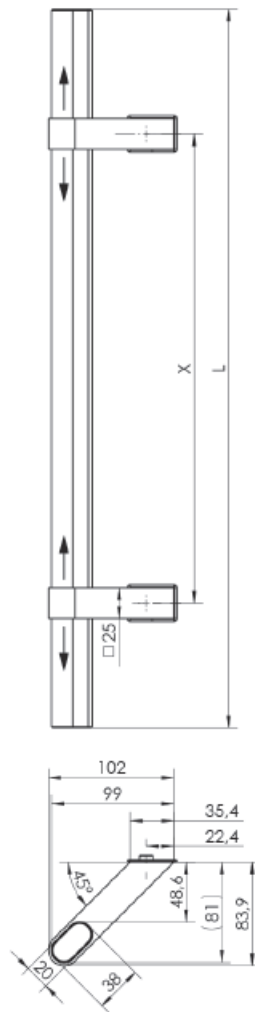

LENGTH L	HOLE SPACING X	304
		OVAL 38x20
500	Unlimited! Bases can be freely moved and adjusted as required.	•
600		•
800		•
1000		•
1200		•
1400 (3 base)		•
1600 (3 base)		•
1800 (3 base)		•

- Product made for individual order
- Product unavailable

Q10P

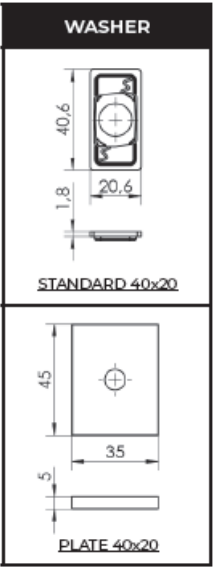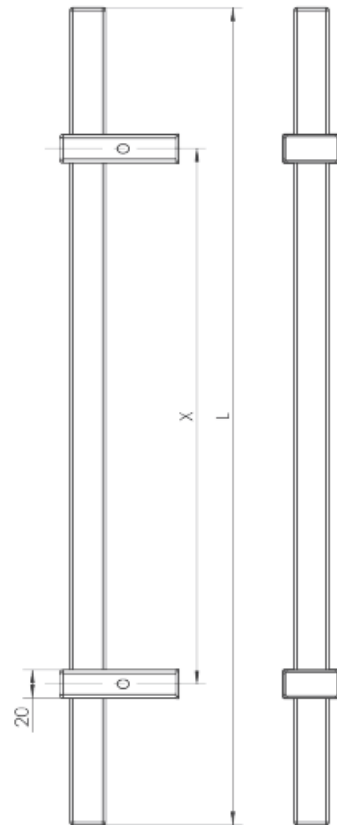

STEEL 304



STEEL 316



BRUSHED
(DEFAULT)

LENGTH L	HOLE SPACING X	304	316
		25x25	25x25
500	300	•	•
600	400	•	•
800	600	•	•
1000	800	•	•
1200	1000	•	•
max 2000	max 1300	•	•



• Product made for individual order
◦ Product unavailable

[MAIN MENU](#)

[MODERN HANDLES](#)



Q10PJ1

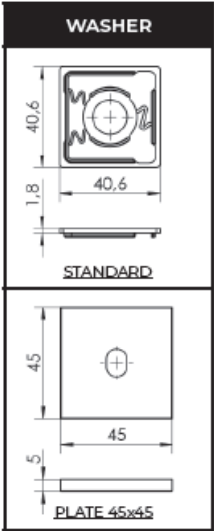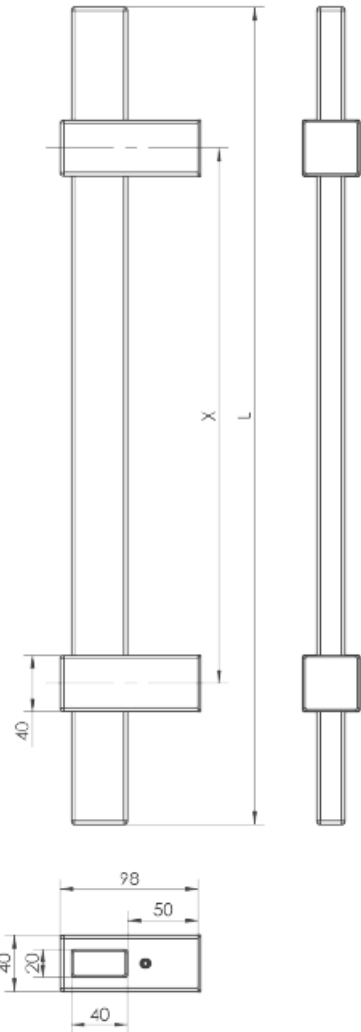





LENGTH L	HOLE SPACING X	304	316
		40x20	40x20
500	300	•	•
600	400	•	•
800	600	•	•
1000	800	•	•
1200	1000	•	•
1600	1400	•	◦
1800	1600	•	◦
max 2000	max 1300	•	•

• Product made for individual order
◦ Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)

Q10PJ2

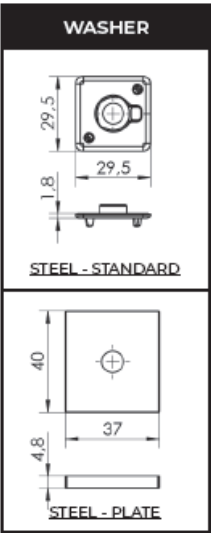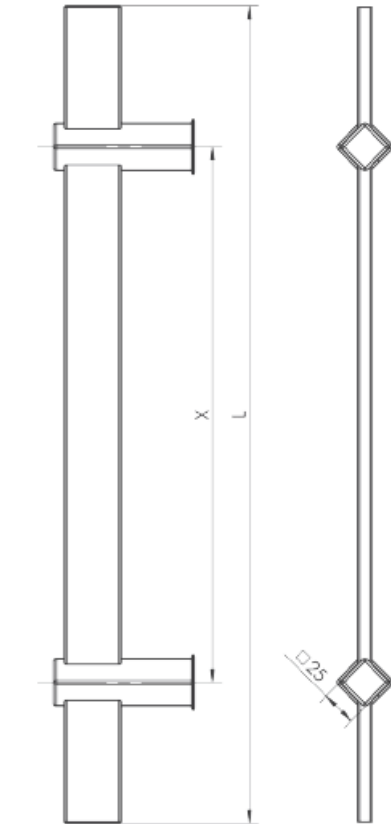

STEEL 304



STEEL 316



BRUSHED (DEFAULT)

LENGTH L	HOLE SPACING X	304	316
		40x10	40x10
500	300	•	•
600	400	•	•
800	600	•	•
1000	800	•	•
1200	1000	•	•
max 1200	max 960	•	•




[MAIN MENU](#)

[MODERN HANDLES](#)


• Product made for individual order
◦ Product unavailable





S10

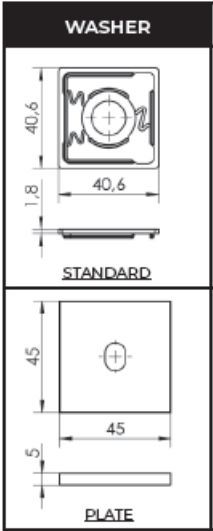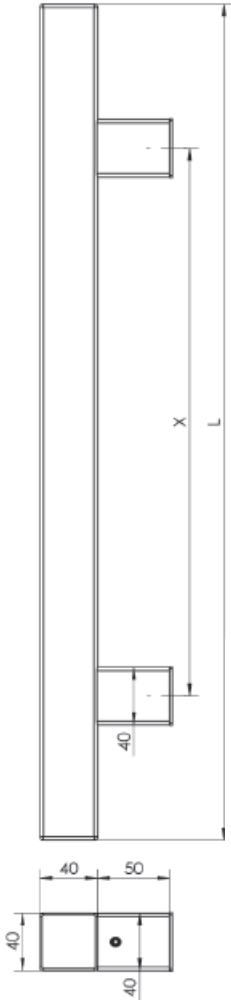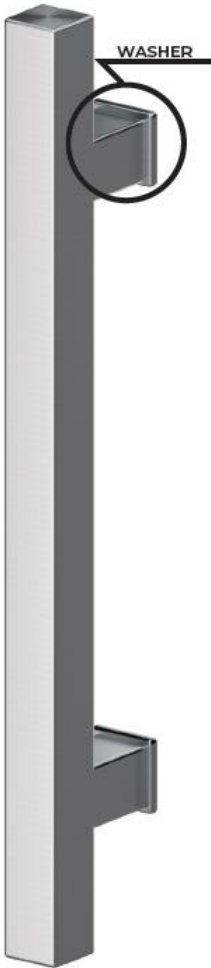


LENGTH L	HOLE SPACING X	304	316	ALUMINIUM
		40x40	40x40	40x40
600	400	*	o	o
800 - 1000	600 - 800	*	o	*
1200	1000	*	*	*
1400 - 1500	1200 - 1300	*	o	*
1600	1200	o	o	*
1600	1400	*	*	o
1800	1300	o	o	*
1800	1600	*	*	o
2000	1600	o	o	*
2000-2200	1800-2000	*	o	o
max 2600	max 2300	any configuration of the length in relation to the spacing availability dependent		



S10J



LENGTH L	HOLE SPACING X	304		316		ALUMINIUM
		40x20	50x25	40x20	50x25	40x20
300 - 400	200	•	•	•	•	•
500 - 580	300 - 380	•	•	•	•	•
600 - 1000	400 - 800	•	•	•	•	•
1200	1000	•	•	•	•	•
1400 - 1500	1200 - 1300	•	•	•	•	•
1600	1200	•	•	•	•	•
1600	1400	•	•	•	•	•
1800	1300	•	•	•	•	•
1800	1600	•	•	•	•	•
2000	1600	•	•	•	•	•
2000	1800	•	•	•	•	•
2200	2000	•	•	•	•	•
max 2600	max 2300	any configuration of the length in relation to the spacing availability dependent				

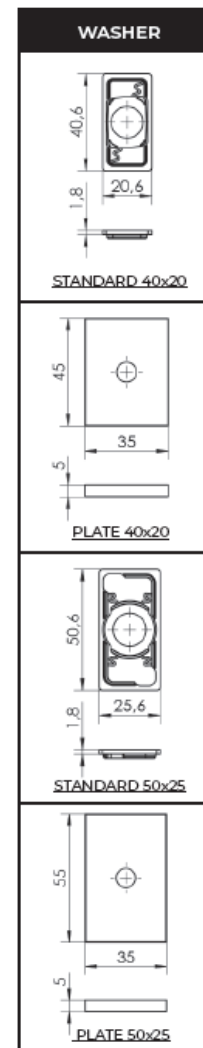

KN




MAIN MENU

MODERN HANDLES


DP10



AVAILABLE FOR DP10 ONLY

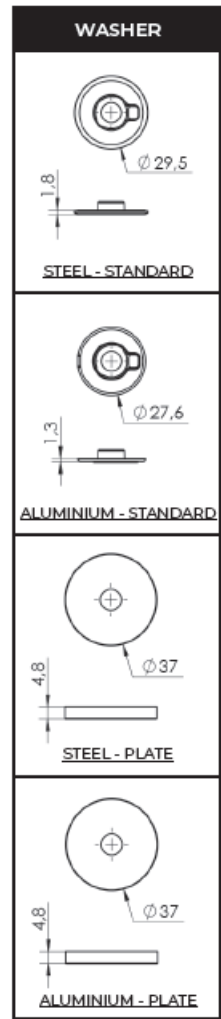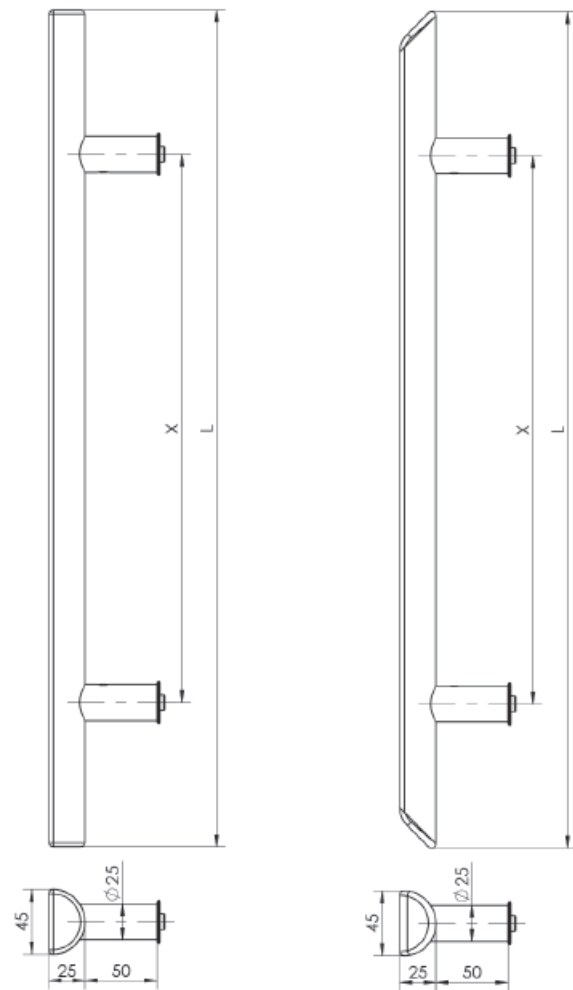

STAL 316



ALUMINIUM

LENGTH L	HOLE SPACING X	316	ALUMINIUM
		Ø45x25	Ø45x25
300 - 1600	200 - 1200	•	•
1601 - 2100	max 1300	•	•

- Product made for individual order
- Product unavailable







[MAIN MENU](#)
[MODERN HANDLES](#)


DP45R



AVAILABLE FOR DAP45R ONLY

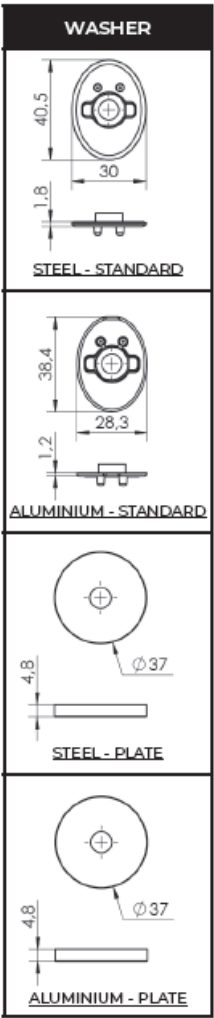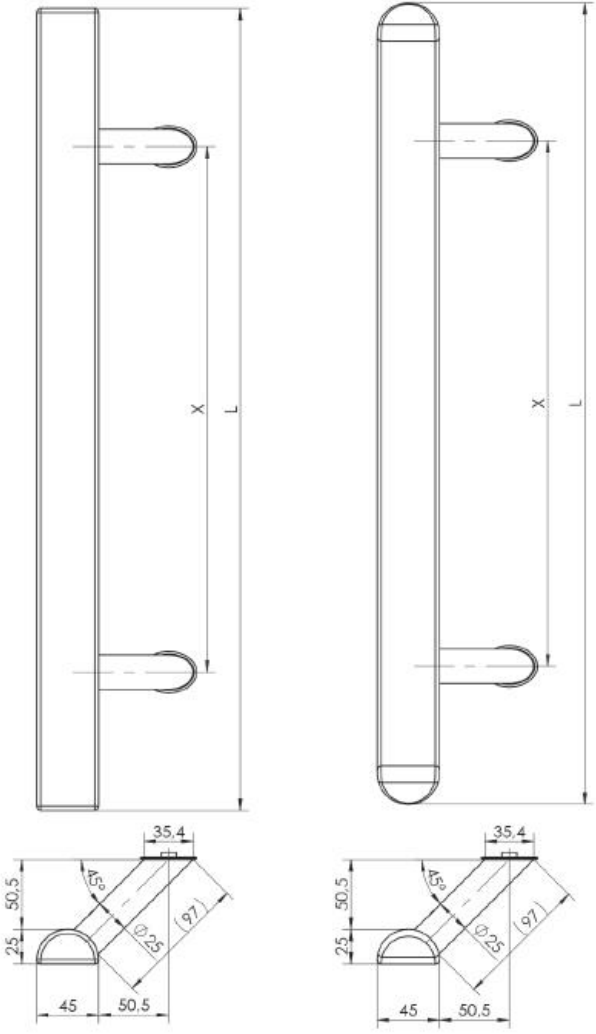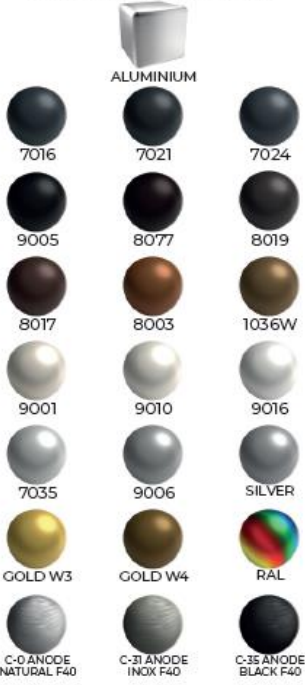

STAL 316



ALUMINIUM

LENGTH L	HOLE SPACING X	316	ALUMINIUM
		Ø45x25	Ø45x25
300 - 1600	200 - 1200	•	•
1601 - 2100	max 1300	•	•

• Product made for individual order
• Product unavailable






[MAIN MENU](#)
[MODERN HANDLES](#)


DQ10



AVAILABLE FOR DQ10 ONLY

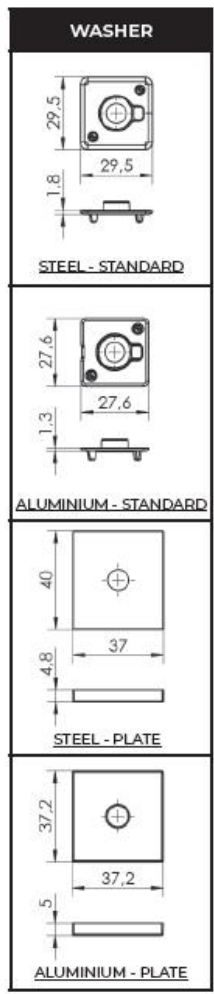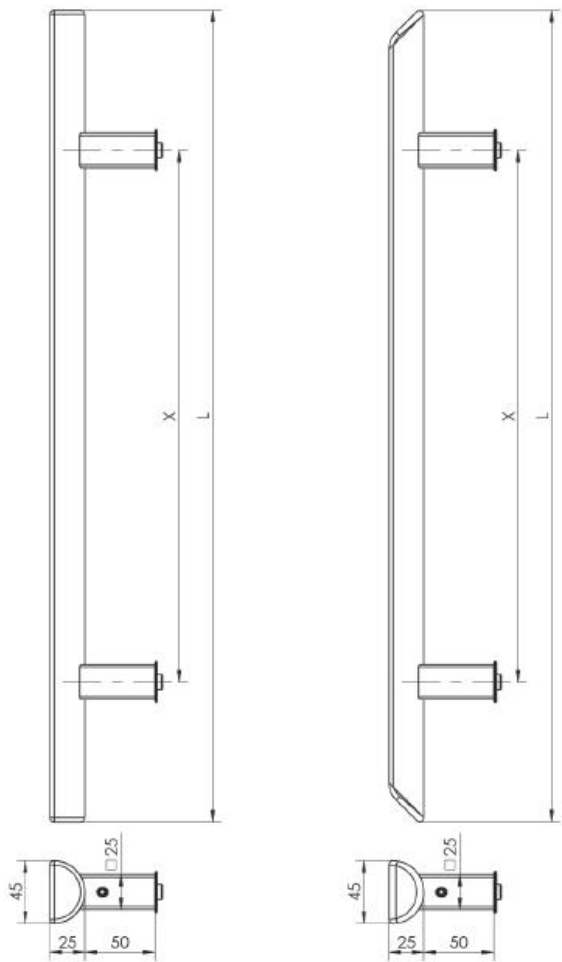

STAL 316



ALUMINIUM



LENGTH L	HOLE SPACING X	316	ALUMINIUM
		Ø45x25	Ø45x25
300 - 1600	200 - 1200	•	•
1601 - 2100	max 1300	•	◦

• Product made for individual order
◦ Product unavailable





[MAIN MENU](#)
[MODERN HANDLES](#)

DQ45R

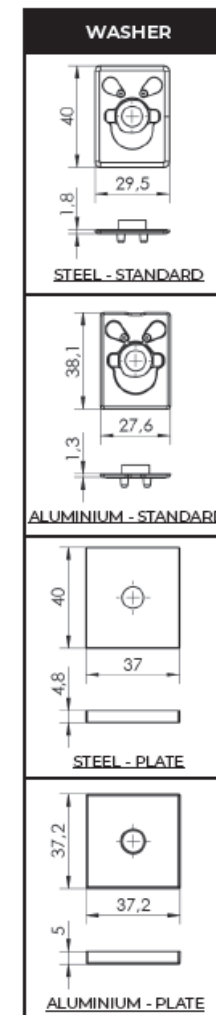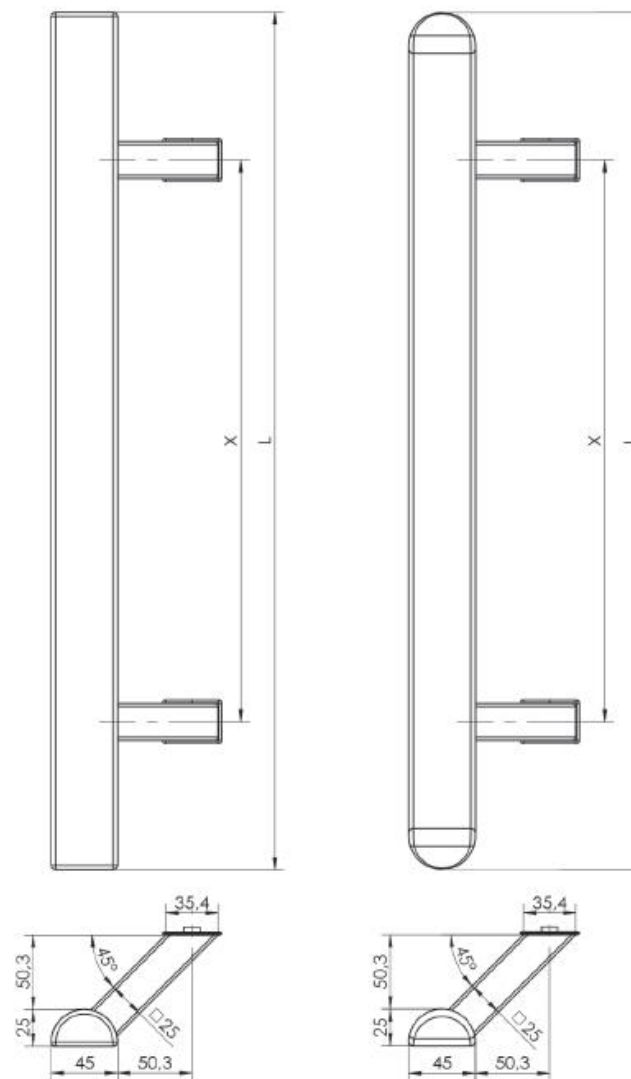

KN







LENGTH L	HOLE SPACING X	316	ALUMINIUM
		Ø45x25	Ø45x25
300 - 1600	200 - 1200	•	•
1601 - 2100	max 1300	•	•

- Product made for individual order
- Product unavailable

MAIN MENU
MODERN HANDLES

D90

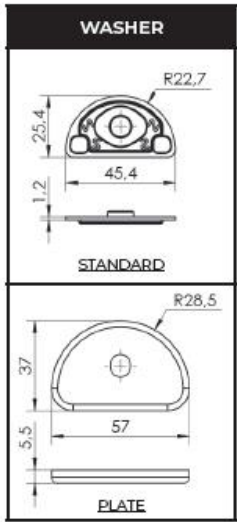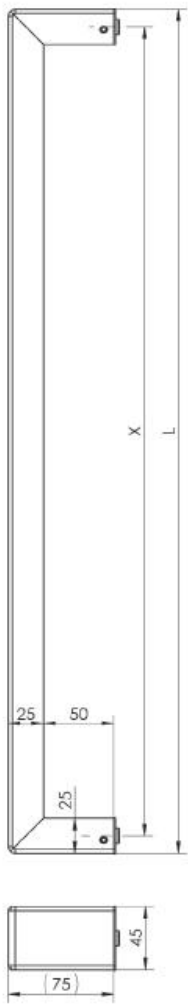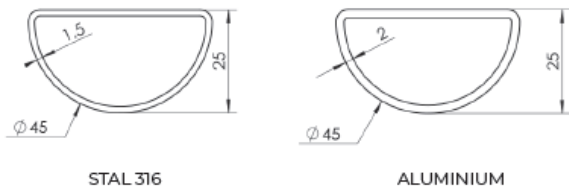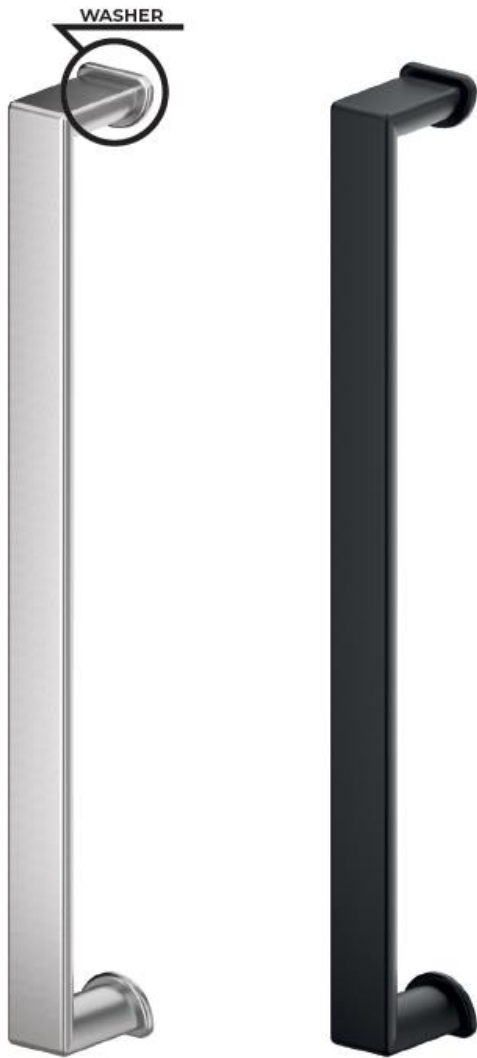

LENGTH L	HOLE SPACING X	316	ALUMINIUM
		Ø45x25	Ø45x25
300 - 1200	L-25	•	•
1201 - 1600	L-25	•	◦

• Product made for individual order
◦ Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)



DQS



STEEL 316



BRUSHED
(DEFAULT)

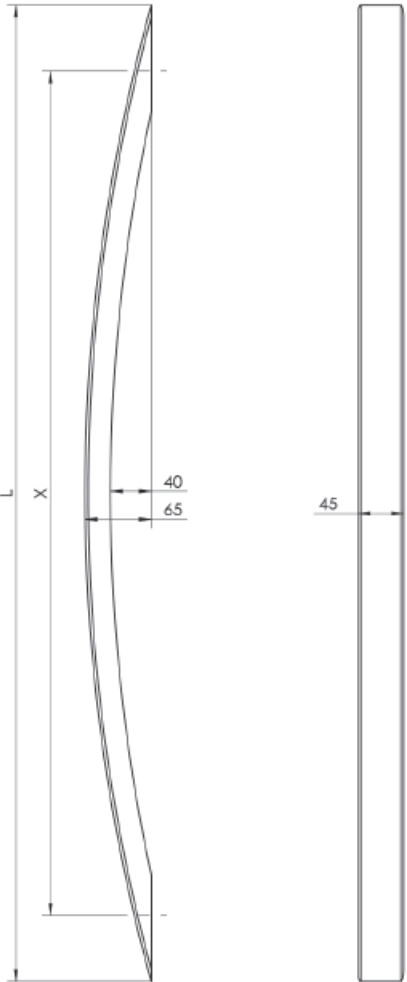




LENGTH L	HOLE SPACING X	316
		Ø45x25
960	830	•

- Product made for individual order
- Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)

QS

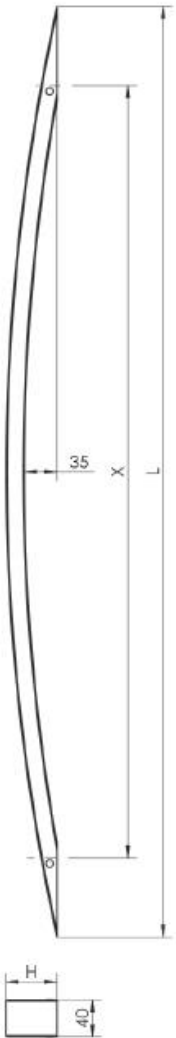




LENGTH L	HOLE SPACING X	304		316	
		40x20	40x40	40x20	40x40
1000	830	•	•	•	•
~1990	1600	•	•	•	•

• Product made for individual order
◦ Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)

OS-OS90

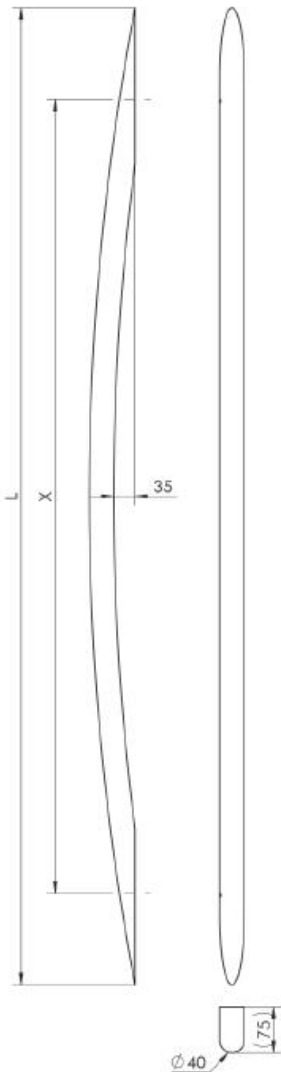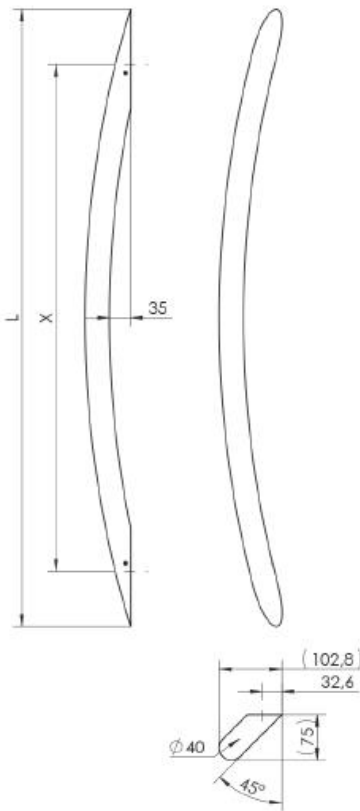




LENGTH L	HOLE SPACING X	304	316
		Ø40	Ø40
OS1000	830	•	•
OS901600	1300	•	•

- Product made for individual order
- Product unavailable

[MAIN MENU](#)
[MODERN HANDLES](#)



PS-PS-W

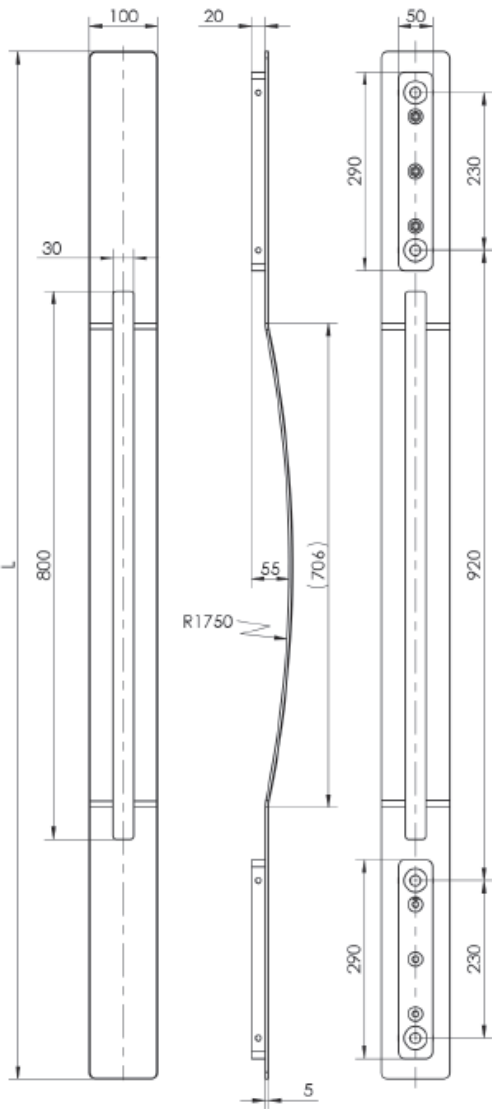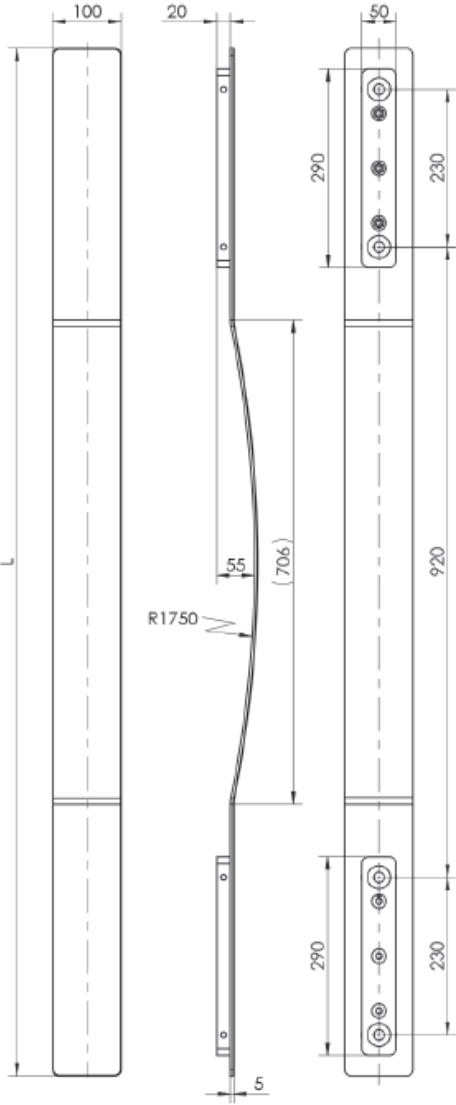

LENGTH L	304	316
	100x5	100x5
1500 - 2400	•	•

• Product made for individual order
◦ Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)



PS11





7016
9005
8017
9001
7035
INOX COATING
RAL

ALUMINIUM
7021
8077
8003
9010
9006
GOLD W3
C-35 ANODE BLACK F40

7024
8019
1036W
9016
SILVER
GOLD W4

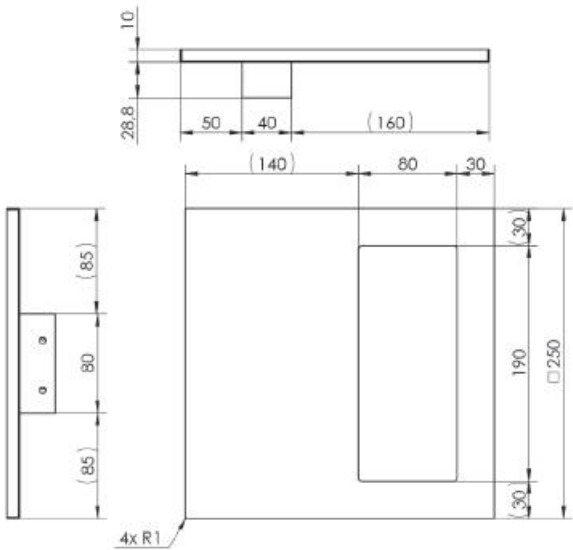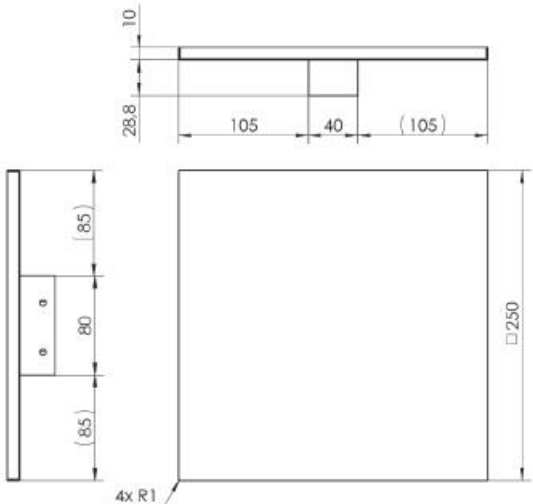


PS12

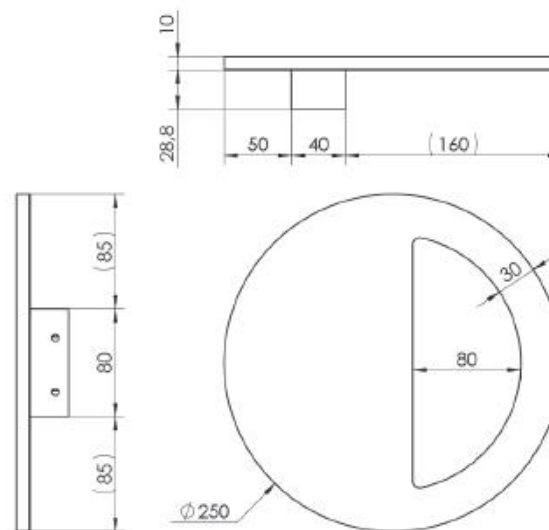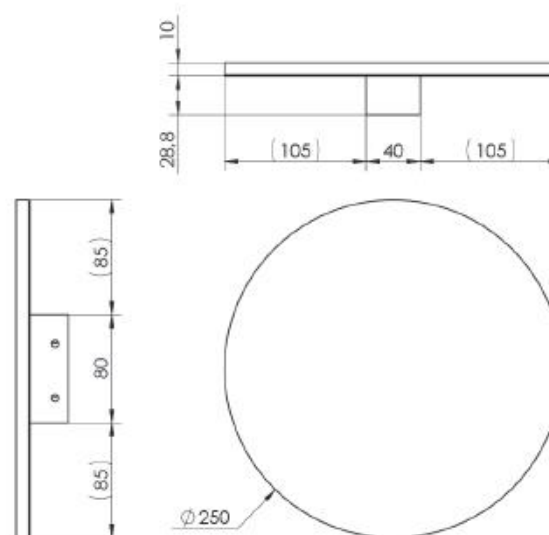

KN

MAIN MENU
MODERN HANDLES


PS21

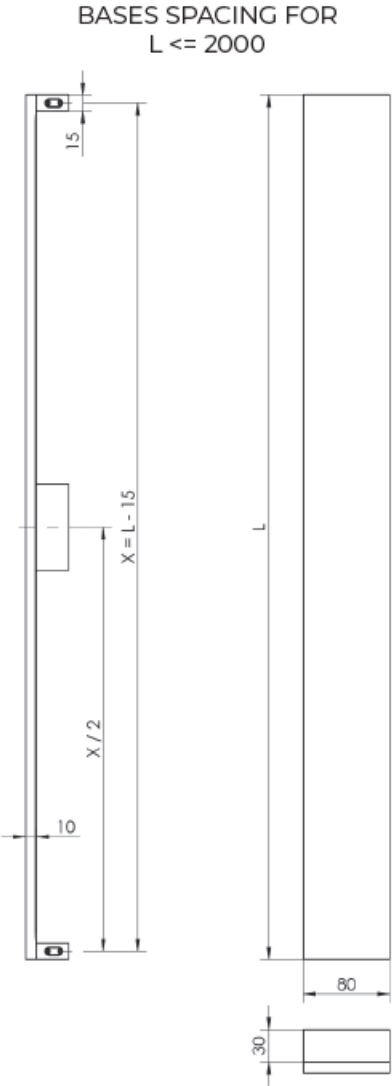


PS21	
LENGTH L	ALUMINIUM
	80x10
800	•
1200	•
1600	•
2000	•
500 - 2500	•

• Product made for individual order
◦ Product unavailable

BASES SPACING FOR
 $L > 2000$



PS01 EXTENSION	
LENGTH L	ALUMINIUM
	80x12
50 - 1200	•

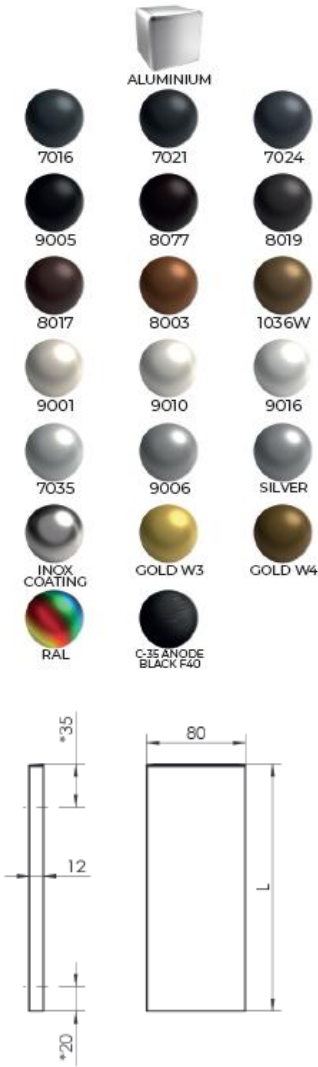

The caps in the handle are black







BLACK

[MAIN MENU](#)
[MODERN HANDLES](#)



Z1

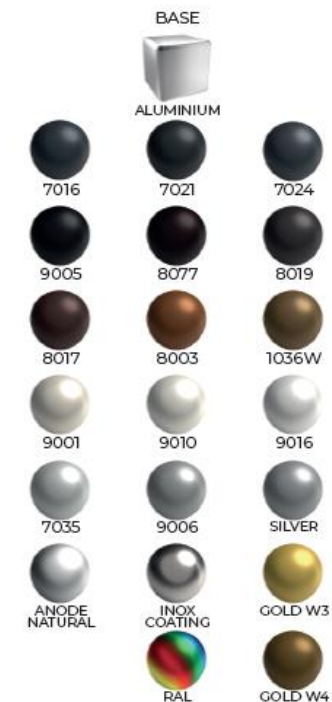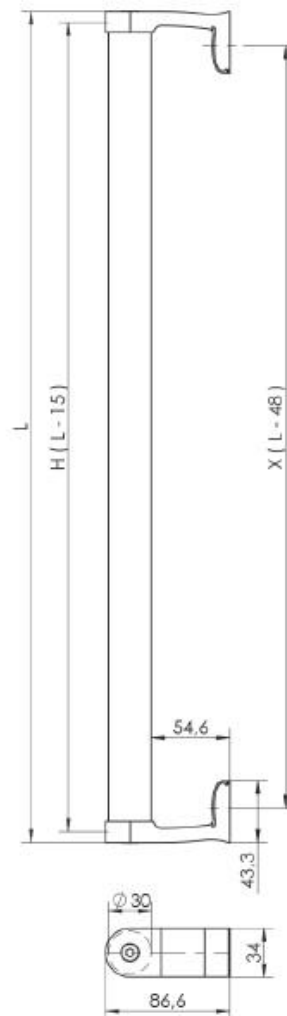





LENGTH L	HOLE SPACING X	304		316	
		Ø30	Ø40	Ø30	Ø40
150 - 1200	102 - 1152	•	•	•	•
1201 - 2500	1153 - 2452	•	•	•	•

• Product made for individual order
 • Product unavailable
 Aluminum only base

KN

MAIN MENU
MODERN HANDLES

Z1 OVAL

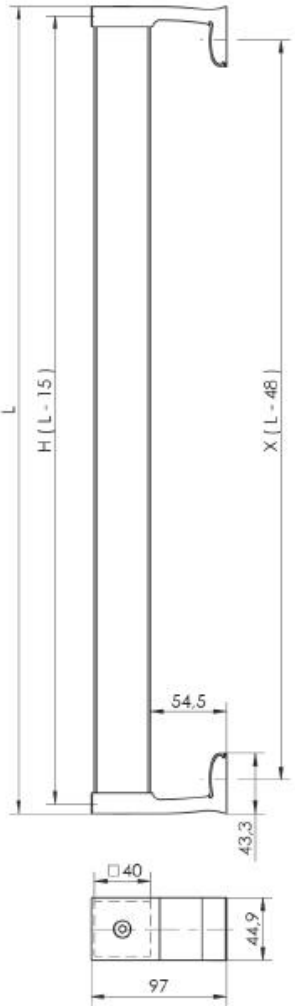
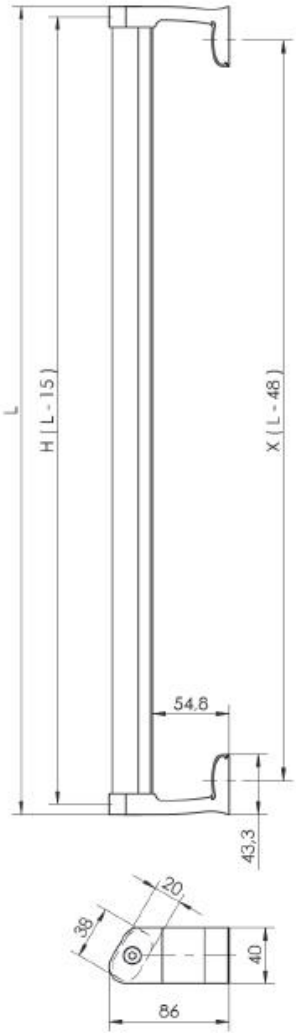


LENGTH L	HOLE SPACING X	304		316
		OWAL 38x20	40x40	40x40
150 - 1100	102 - 1052	•	•	•
1101 - 2500	1053 - 2452	◦	•	•

• Product made for individual order
◦ Product unavailable
Aluminum only base

[MAIN MENU](#)
[MODERN HANDLES](#)

Z1 ELLIPSE

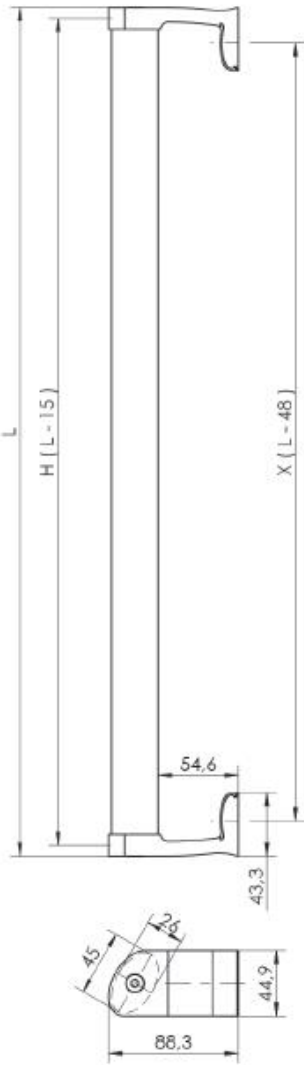






LENGTH L	HOLE SPACING X	ALUMINIUM
		ELLIPSE 45x26
150 - 1600	102 - 1552	•

- Product made for individual order
- Product unavailable

[MAIN MENU](#)
[MODERN HANDLES](#)



Z1N

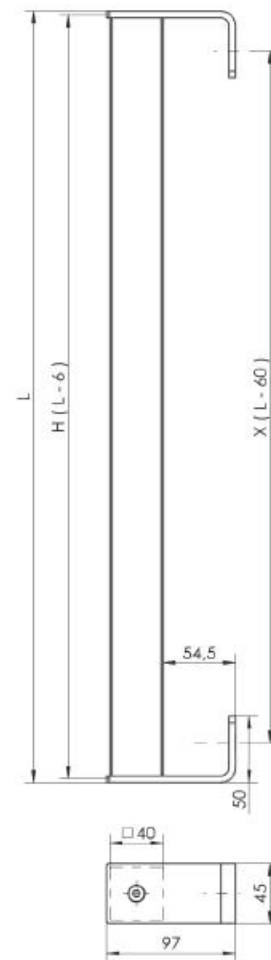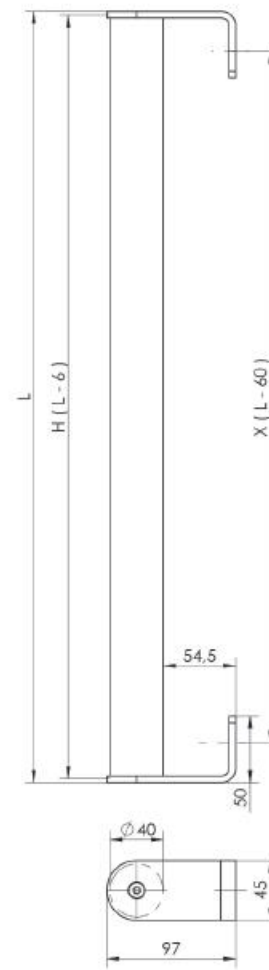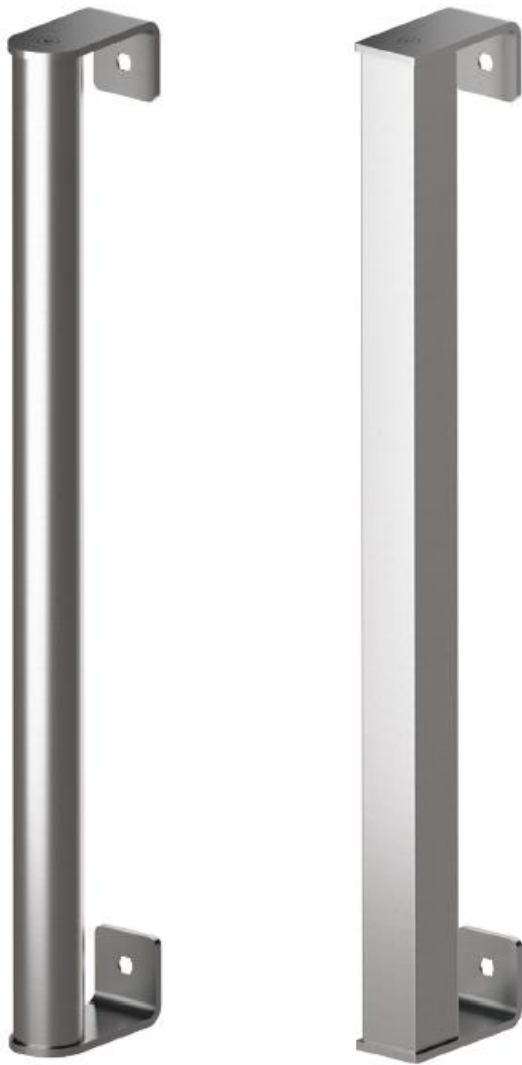





LENGTH L	HOLE SPACING X	304		316	
		Ø40	40x40	Ø40	40x40
150 - 2500	102 - 2440	•	•	•	•

- Product made for individual order
- Product unavailable



[MAIN MENU](#)
[MODERN HANDLES](#)

Z1P

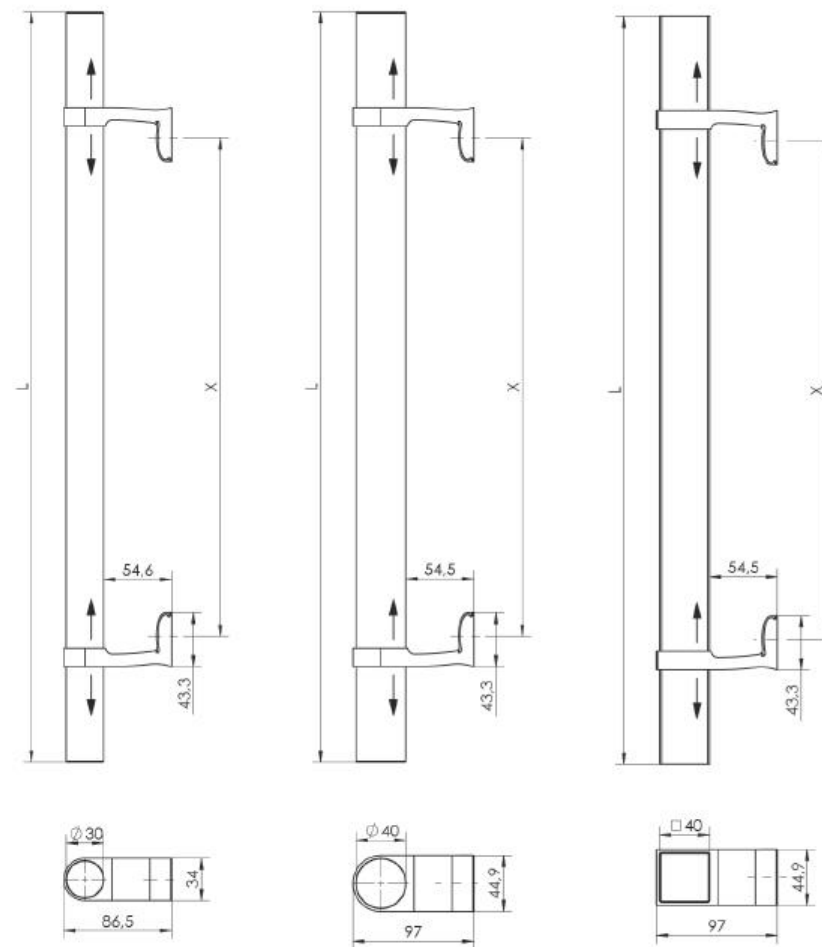





LENGTH L	HOLE SPACING X	304			316		
		Ø30	Ø40	40X40	Ø30	Ø40	40X40
150 - 1600	Unlimited!	•	•	•	•	•	•
1601 - 2500		◦	•	•	◦	•	•

• Product made for individual order
◦ Product unavailable
Aluminum only base

KN

MAIN MENU
MODERN HANDLES

K1-K1L 150

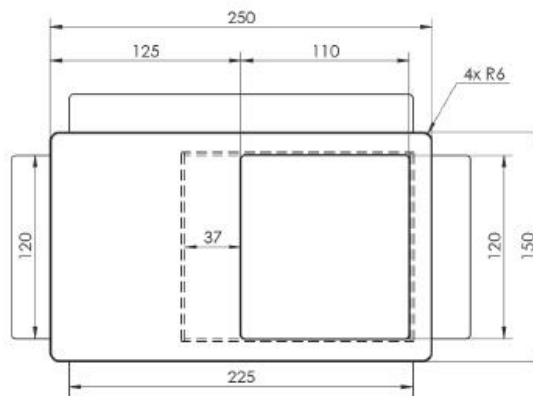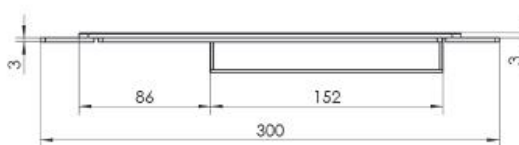
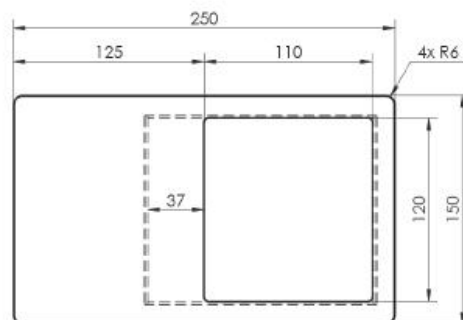


STEEL 304



BRUSHED
(DEFAULT)

K1-K1L 550

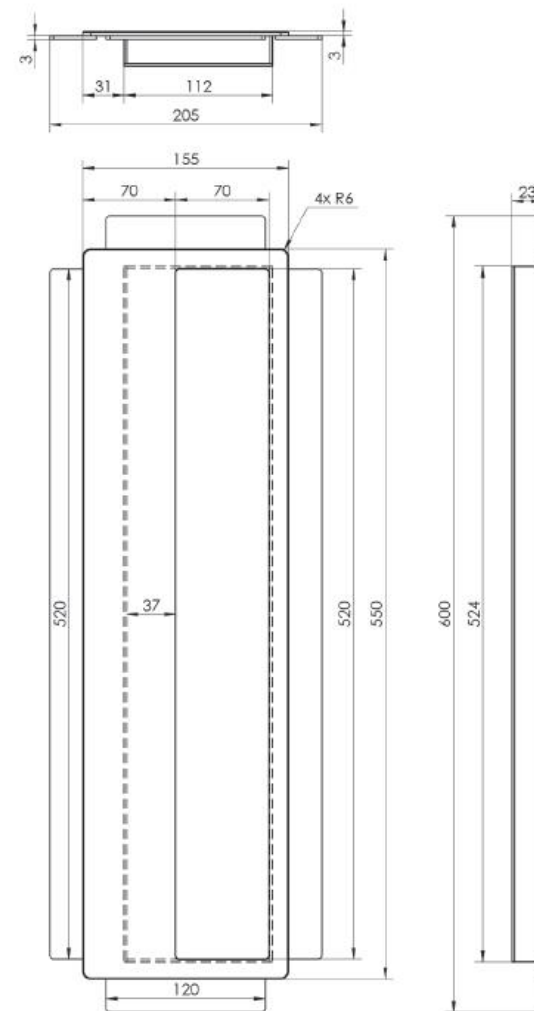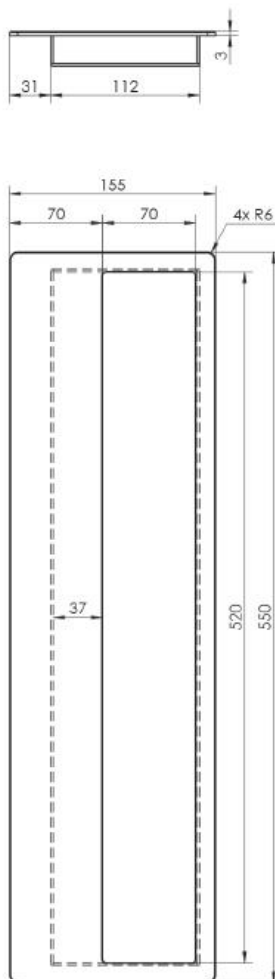

K1L - faced with the door panel



STEEL 304



BRUSHED
(DEFAULT)






K1-K1L 115




STEEL 304



BRUSHED
(DEFAULT)

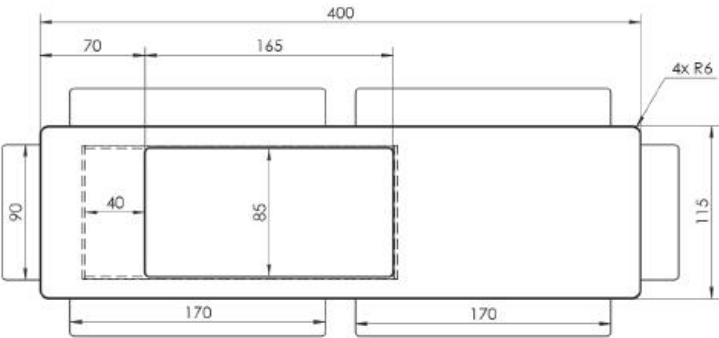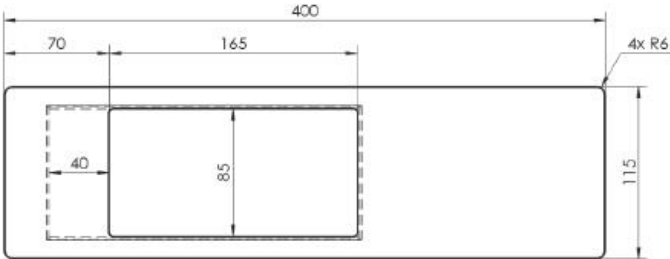

K3

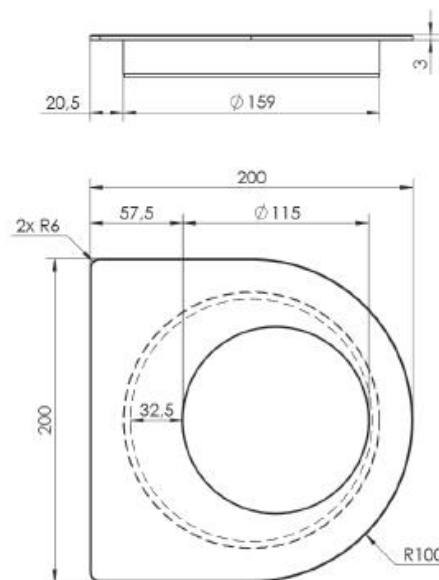

STEEL 304




BRUSHED
(DEFAULT)

KN

MAIN MENU
MODERN HANDLES

K5

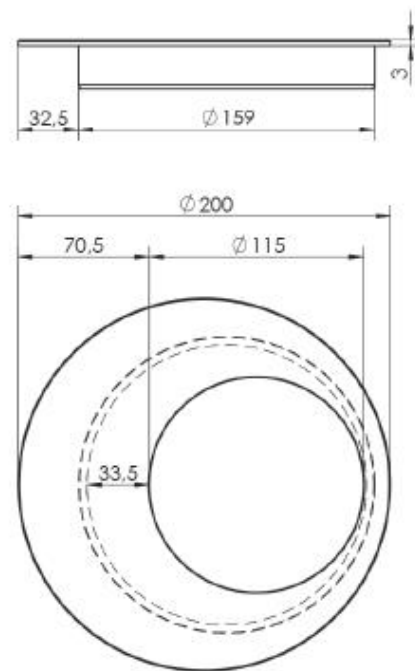

STEEL 304





BRUSHED
(DEFAULT)



KN

MAIN MENU
MODERN HANDLES

KA1

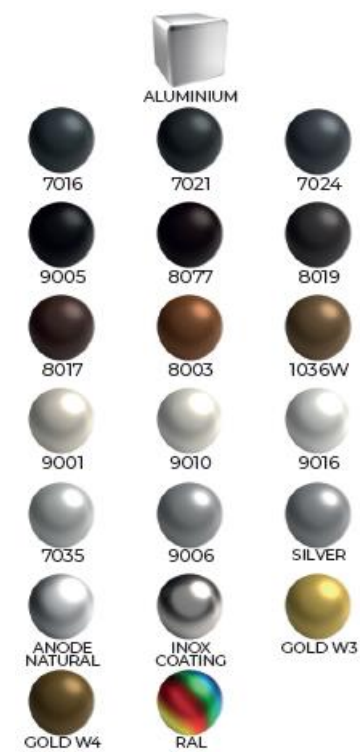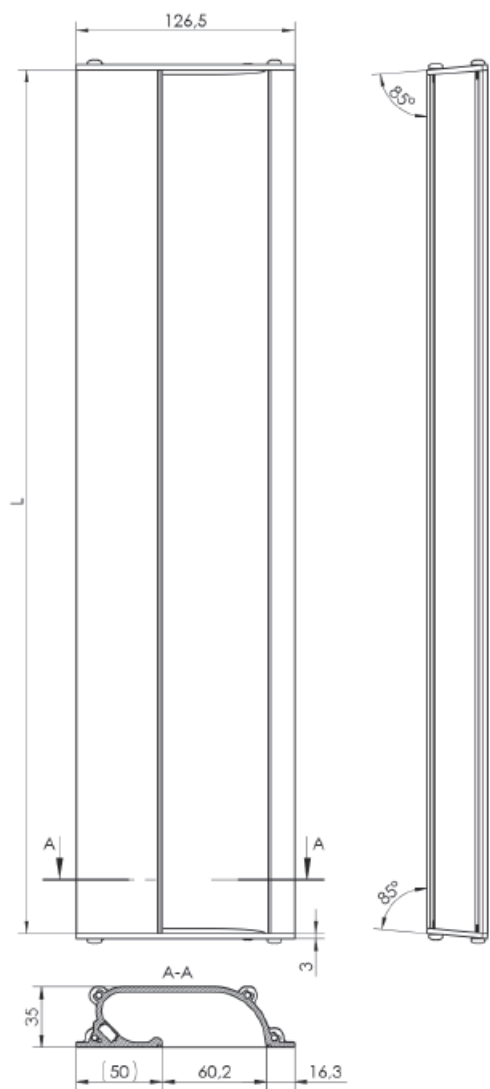


LENGTH L	WIDTH	ALUMINIUM
		KA1
800 - 3000	61	•

- Product made for individual order
- Product unavailable

[MAIN MENU](#)
[MODERN HANDLES](#)



KA1A 200

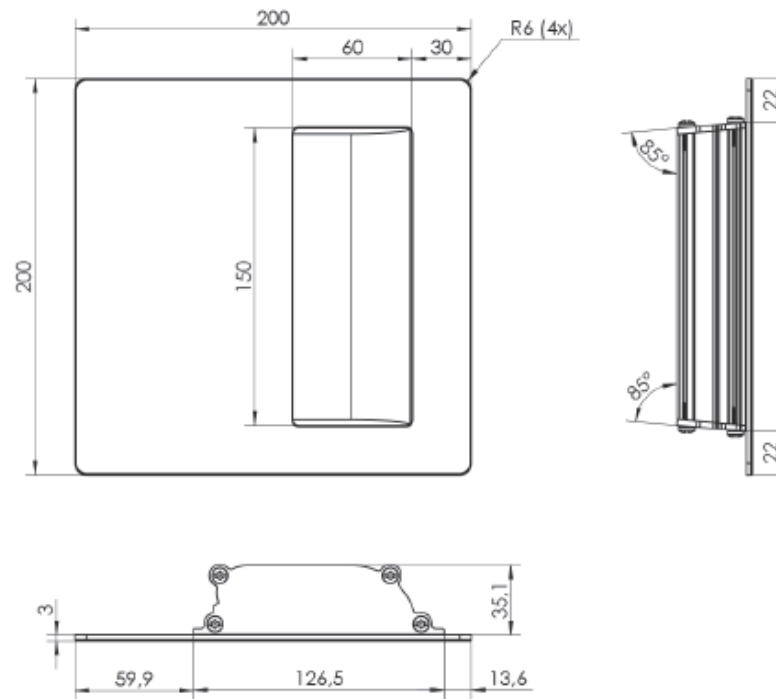




- KA1A 200x200 - handle made entirely of aluminum, possibility of finishing the whole in the colors of the RAL palette or in anode natural,

- KA1N 200x200 - handle made of 304 stainless steel (front panel) and aluminum (handle pocket), possibility of finishing the handle pocket in INOX color,



MAIN MENU
MODERN HANDLES

KA1A 250

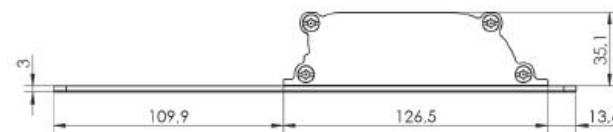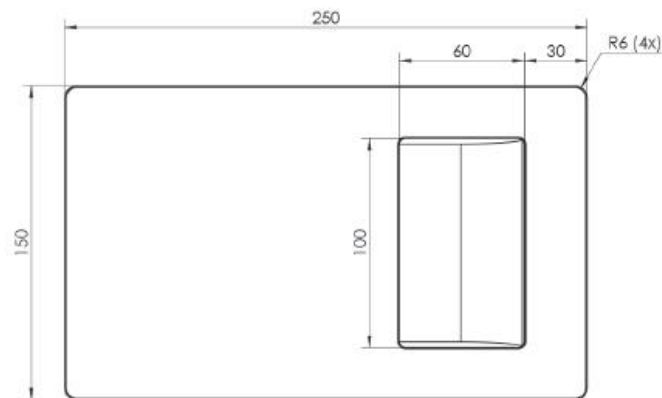


- KA1A 250x150 - handle made entirely of aluminum, possibility of finishing the whole in the colors of the RAL palette or in anode natural.
- KA1N 250x150 - handle made of 304 stainless steel (front panel) and aluminum (handle pocket), possibility of finishing the handle pocket in INOX color.
- KA1NL 250x150 - the handle is flush with the door panel, it does not protrude beyond the door plane, the handle is made of 304 stainless steel (front panel) and aluminum (handle pocket), the handle pocket can be finished in INOX color.



MAIN MENU
MODERN HANDLES





EKEY

FINGERPRINT SCANNER



IDENCOM 1


FINGERPRINT SCANNER

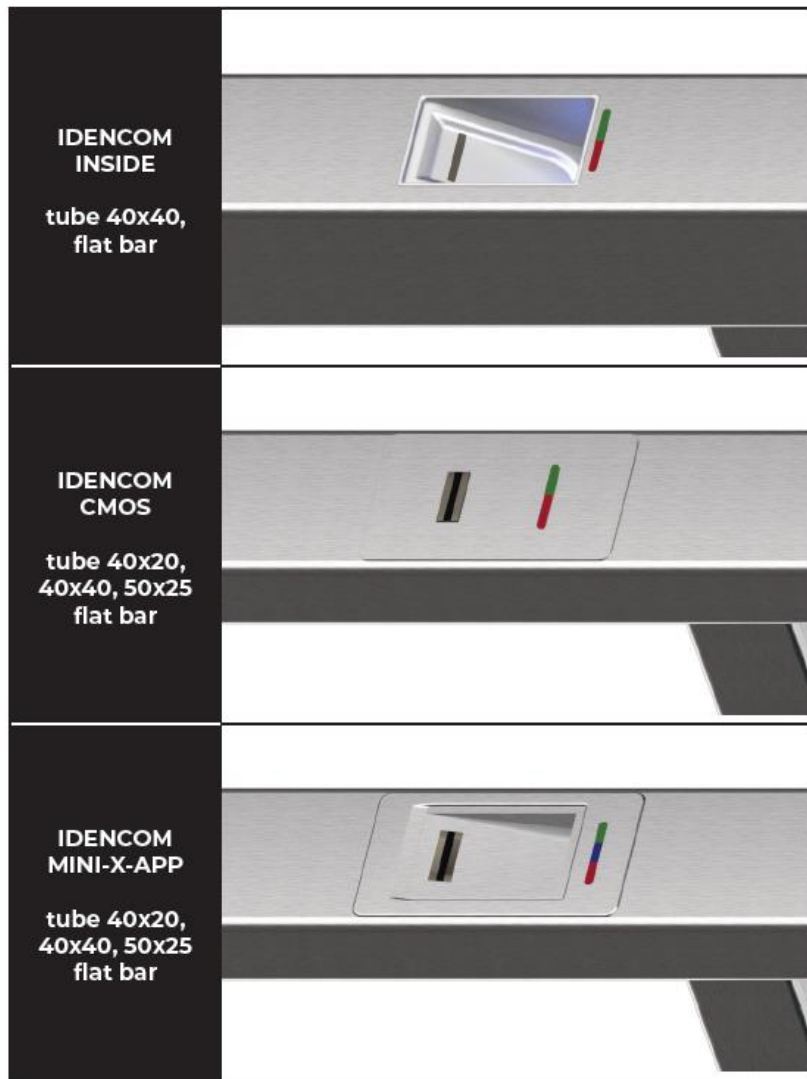

SOREX UNILOCK

FINGERPRINT SCANNER, KEYPAD, RFID + CAMERA



SOREX UNILOCK flat bar	
SOREX UNILOCK + CAMERA flat bar	
SOREX MINI flat bar	



[MAIN MENU](#)
[MODERN HANDLES](#)





IDENCOM 2

KEYPAD + RFID

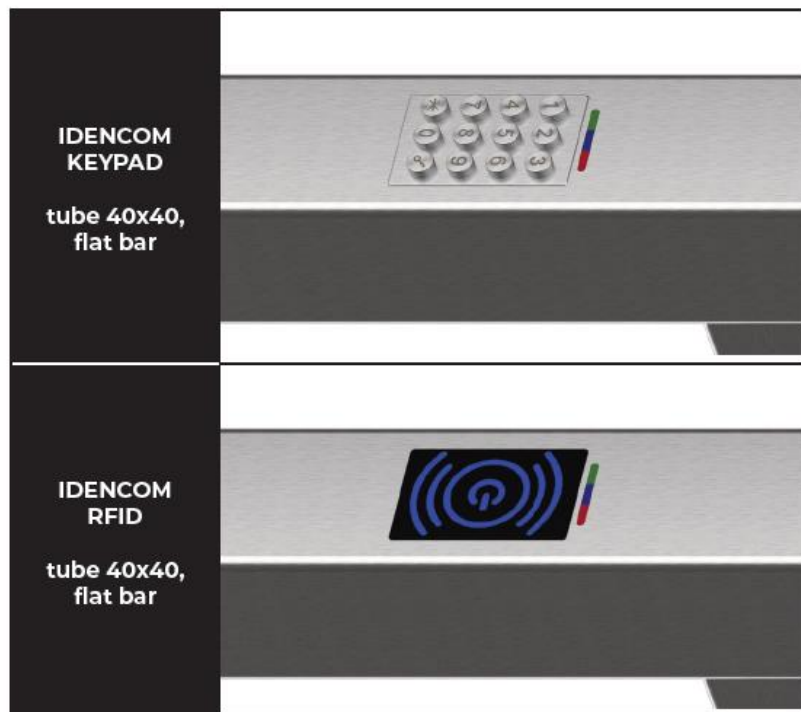



SIEGENIA

FINGERPRINT SCANNER + KEYPAD

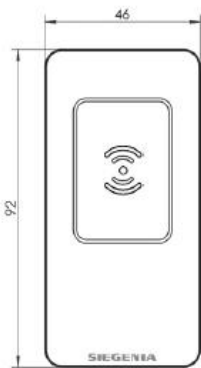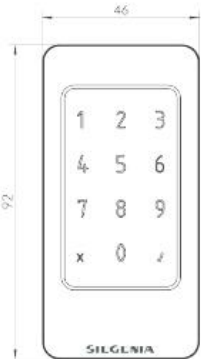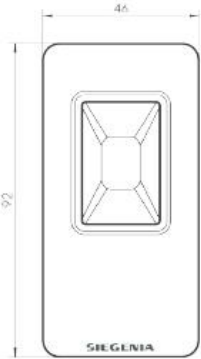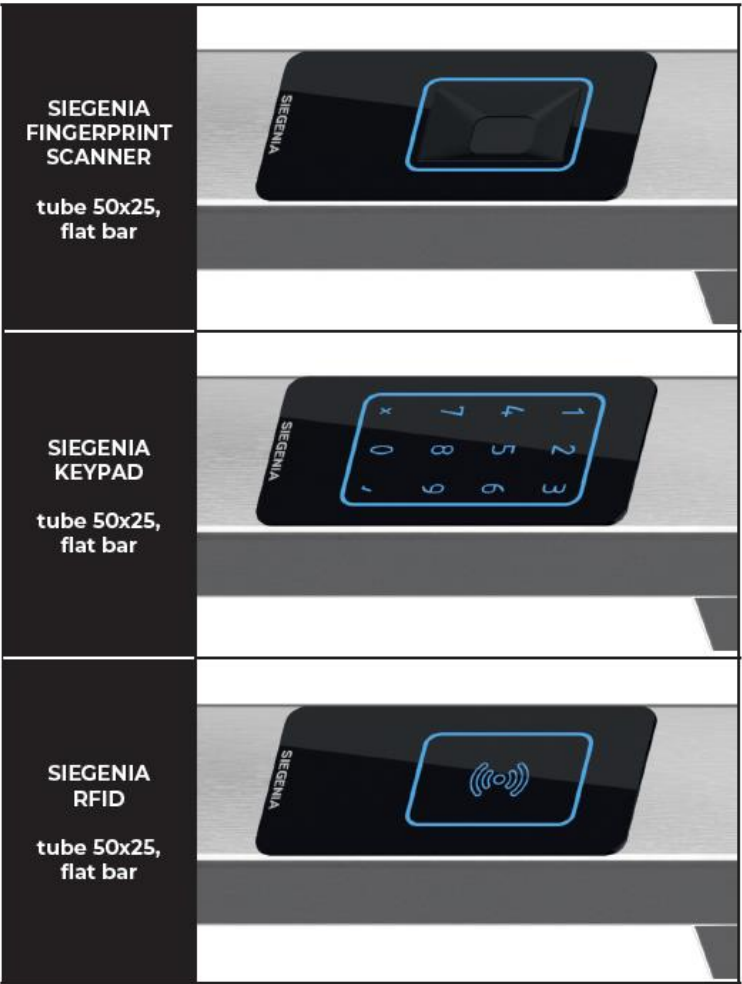

NAVKOM

FINGERPRINT SCANNER

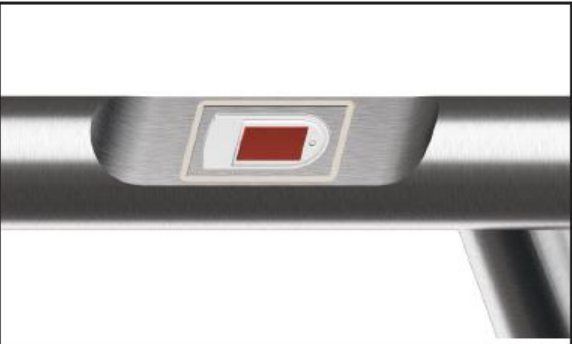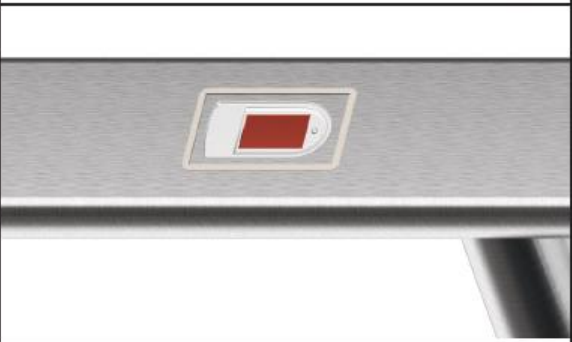NAVKOM tube Ø30, Ø40	
NAVKOM tube Ø45x25	
NAVKOM tube 40x20, 40x40, 50x25, flat bar	






KN


MAIN MENU
MODERN HANDLES

SOMMER

FINGERPRINT SCANNER + KEYPAD

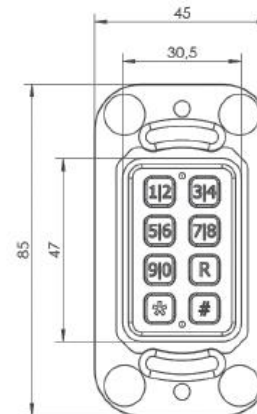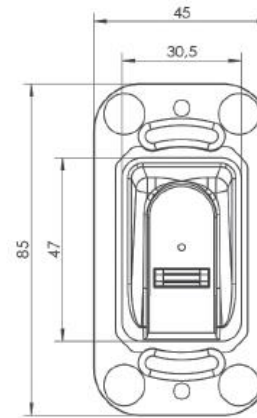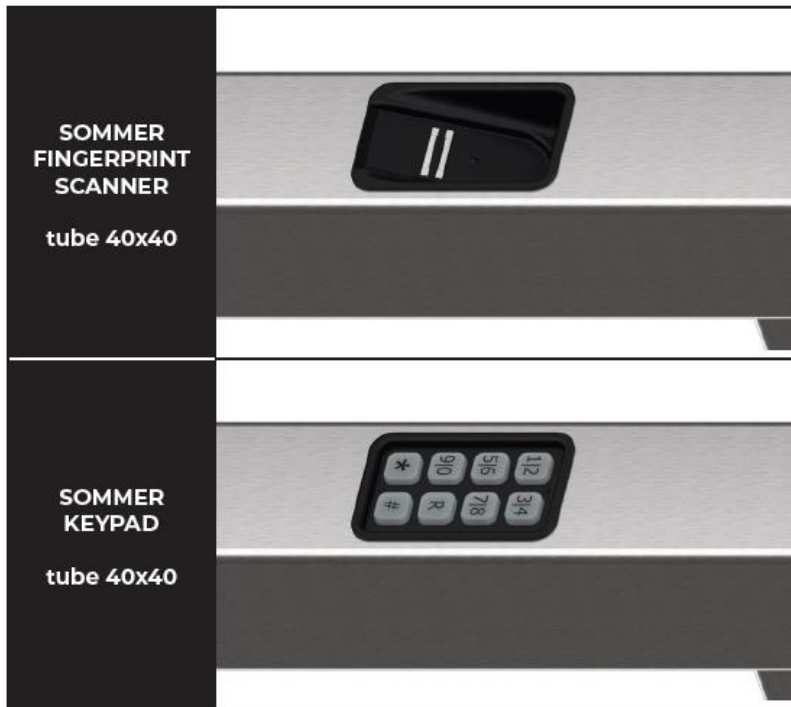


MICROSWITCH

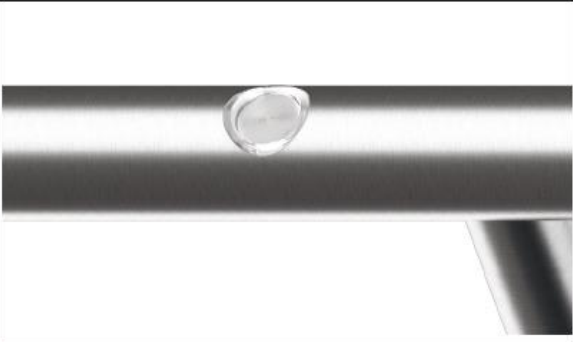	
MICROSWITCH IN A ROUND TUBE Ø30, Ø40	MICROSWITCH IN A ROUND TUBE Ø30, Ø40 DOORBELL GRAVER
	
MICROSWITCH IN A TUBE 25x25, 40x20, 40x40, 50x25	MICROSWITCH IN A RECTANGULAR TUBE 25x25, 40x20, 40x40, 50x25 DOORBELL GRAVER

BACKLIGHT COLOURS (ADDITIONAL OPTION)				
				
WHITE COLD	WHITE NEUTRAL	WHITE WARM	BLUE	RED

General functions of microswitch:


- Compatible with most of the electromechanical locks and electric strike locks, provide opening and closing the door.
- Controlling light points in a handle, on/off option.
- Controlling external device, e.g. lighting of the building when connected to a handle.
- Function of a momentary pushbutton enable to connect, e.g.: a bell.




MICROSWITCH




MICROSWITCH
DOORBELL GRAVER

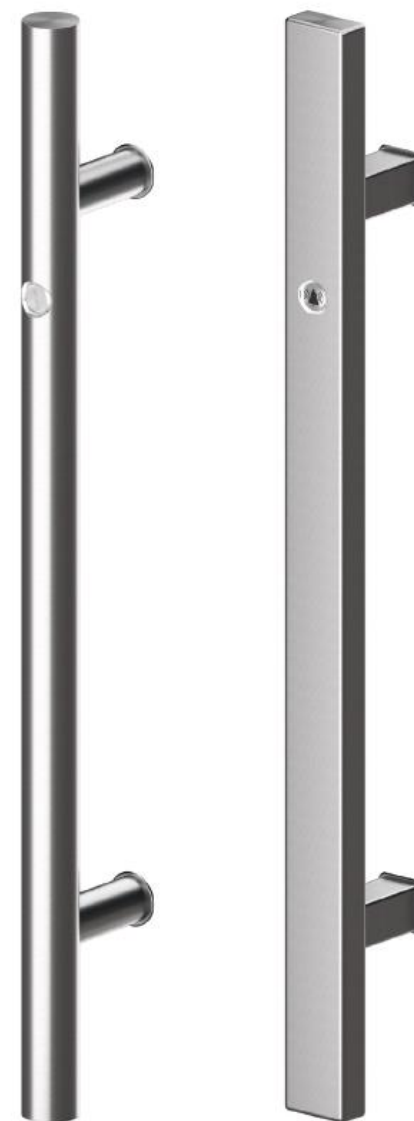


TOUCH SENSOR




SENSOR Ø30




SENSOR Ø30
DOORBELL GRAVER

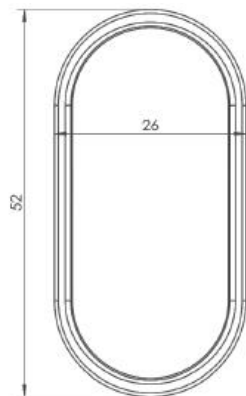


TOUCH SENSOR Ø40

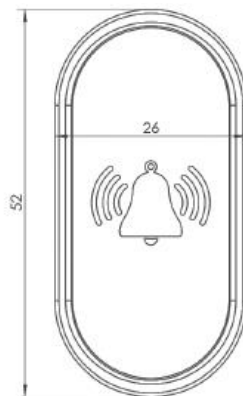


TOUCH SENSOR Ø40
DOORBELL GRAVER



SENSOR
RECTANGULAR TUBE



SENSOR
RECTANGULAR TUBE
DOORBELL GRAVER



MICROSENSOR



MICROSENSOR
DOORBELL GRAVER



General functions of touch sensor:

- The ability to control one or two independent electrical systems: single or bifunctional electronics.
- Compatible with most of the electromechanical locks and electric strike locks, provide opening and closing the door.
- Controlling light points in the handle, including the option of time-based backlight 30s.
- Controlling external device, e.g. lighting of the building.
- Function of a momentary pushbutton enable to connect, e.g.: a bell.

SWITCH

SWITCH P10, PA10, P45, PA45 rura Ø30, Ø40	
SWITCH Q10, QA10, Q45RX, QA45RX rura 40x20, 40x40	




BACKLIGHT COLOURS			
			
WHITE COLD	WHITE NEUTRAL	WHITE WARM	RGB


General functions of switch:

- Operation and compatibility with electric strikes or electric locks of most manufacturers on the market, allows you to open the door.
- Possibility of backlighting the button.



LED IN A TUBE

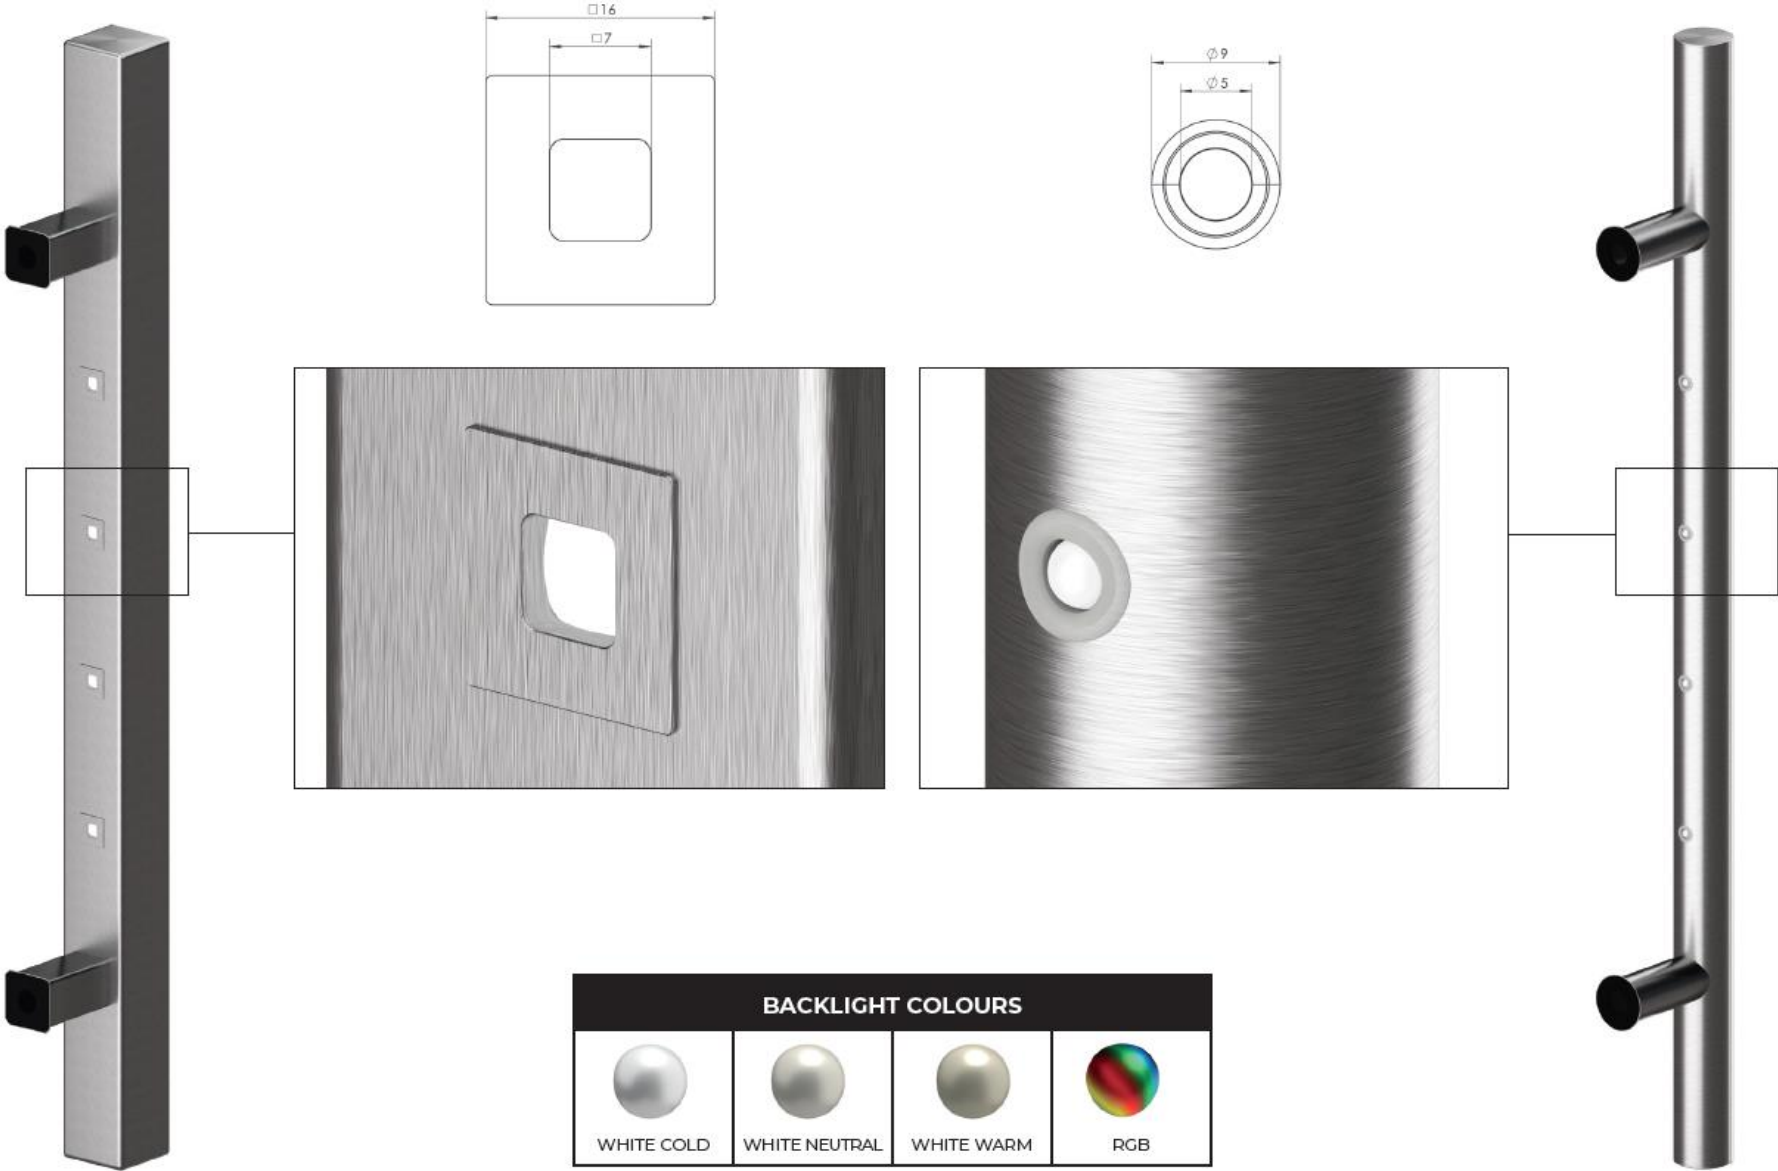

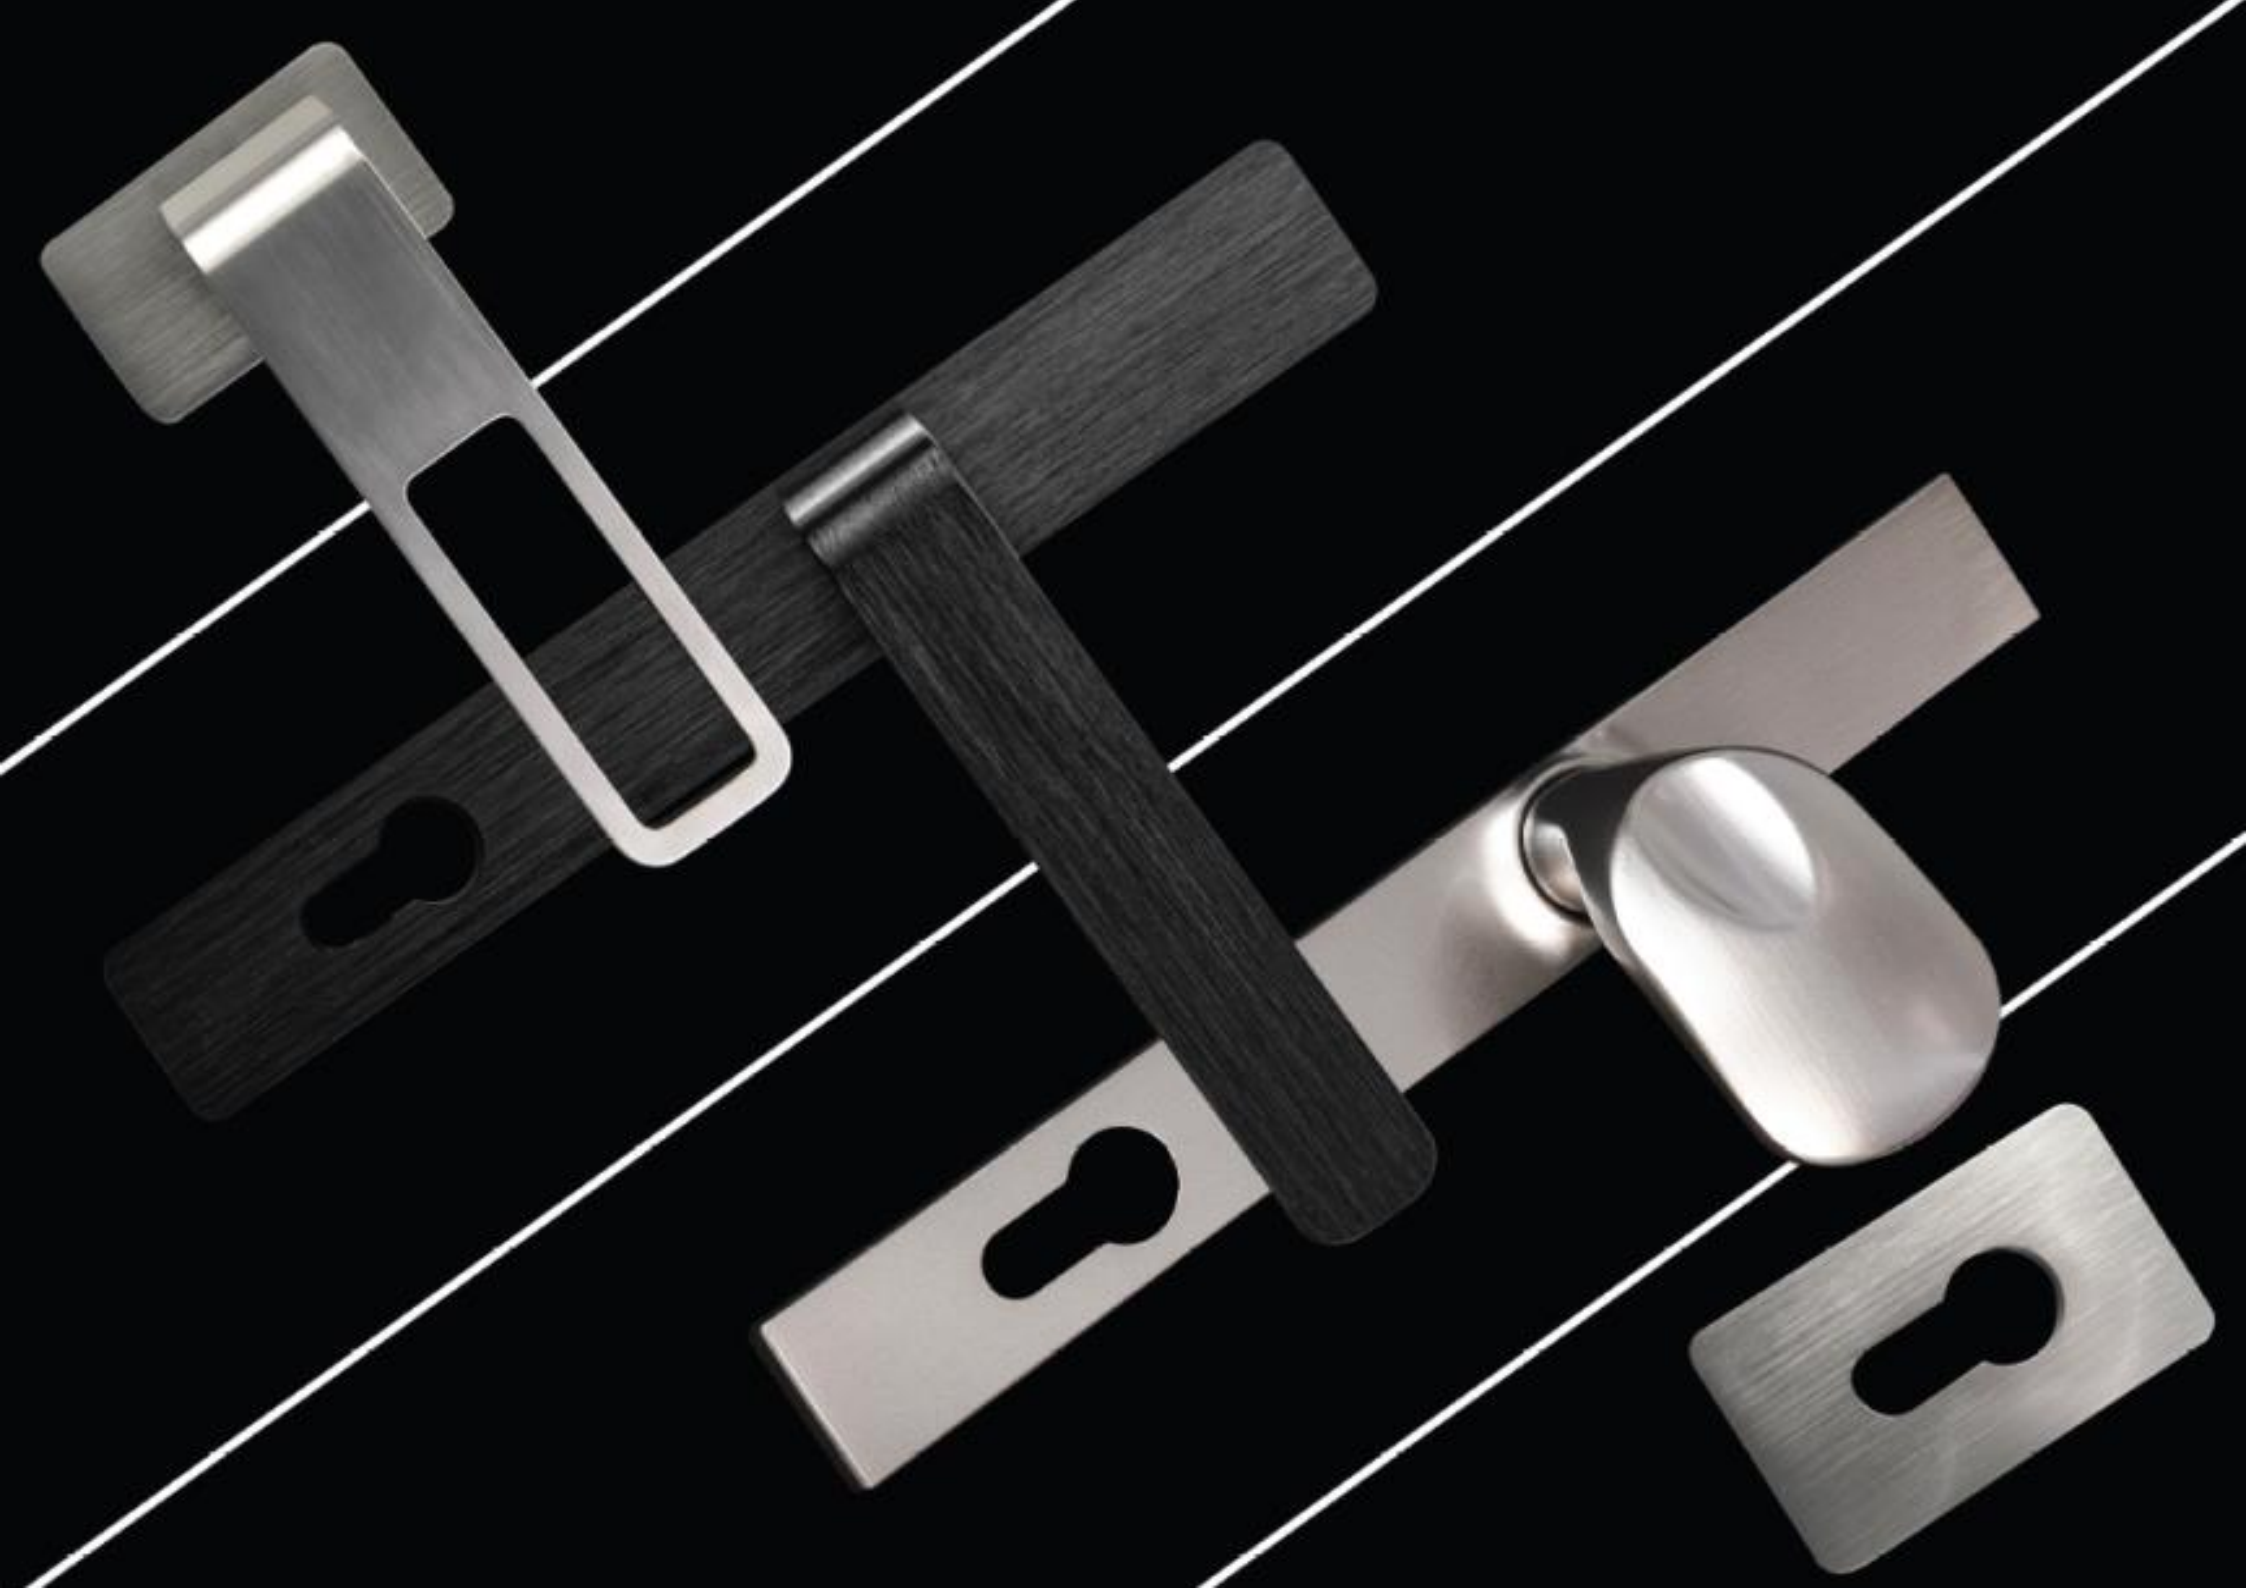

CLASSIC HANDLES AND ESCUTCHEONS



H1, H2, H3



G1, G3



S1



S2



M2, M3



SK1



H6



H7

MAIN MENU



G5



S5S34G6, S5S42G6




SK3



S ESCUTCHEON



QM ESCUTCHEON

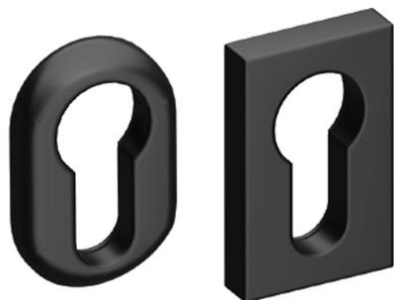

GO ESCUTCHEON



RING LOCK






LI ESCUTCHEON





SR ESCUTCHEON

H1, H2, H3

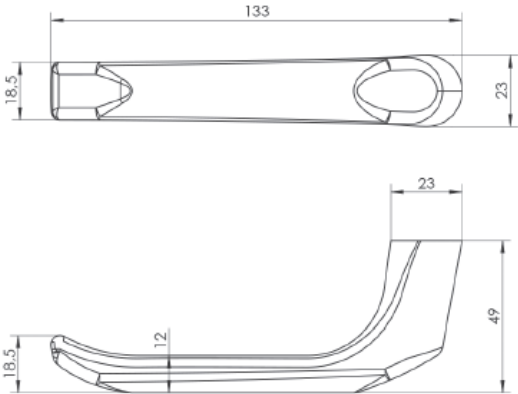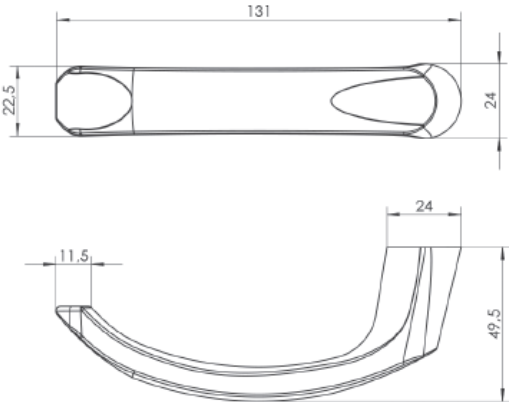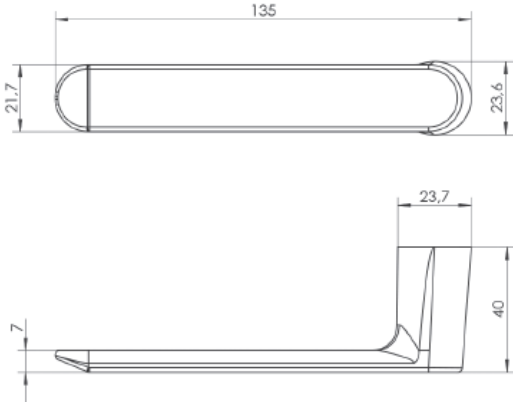DOOR HANDLE H1	DOOR HANDLE H2 (safe)	DOOR HANDLE H3
		
		



G1, G3




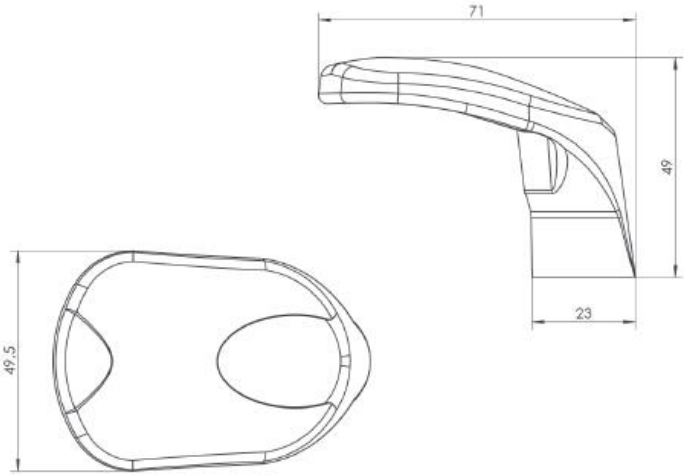
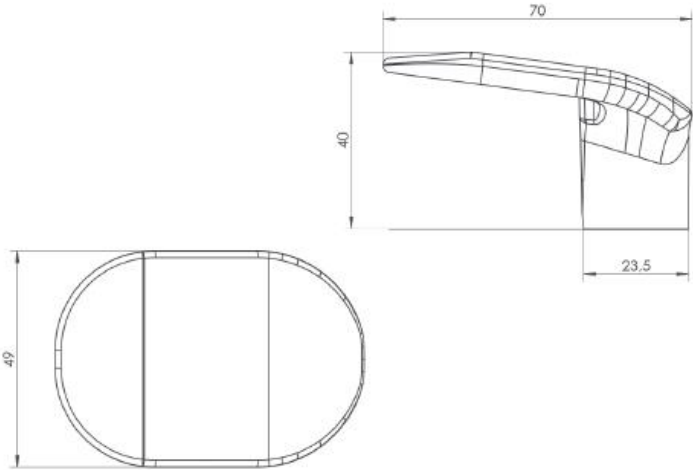
G1 DOOR KNOB	G3 DOOR KNOB
	
	

- | | |
|--|---|
| 
7016 | 
7021 |
| 
7024 | 
9005 |
| 
8077 | 
8019 |
| 
8017 | 
8003 |
| 
9001 | 
1036W |
| 
9010 | 
9016 |
| 
7035 | 
9006 |
| 
SILVER | 
CHROME MAT |
| 
INOX
COATNG | 
GOLD W3 |
| 
GOLD W4 | 
RAL |

S1



H2S1

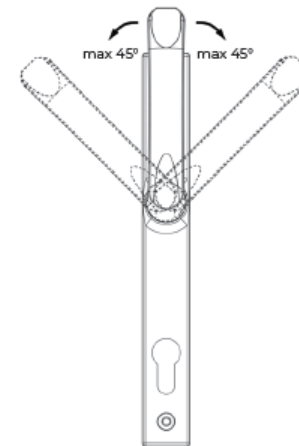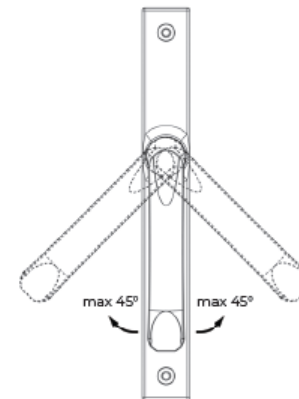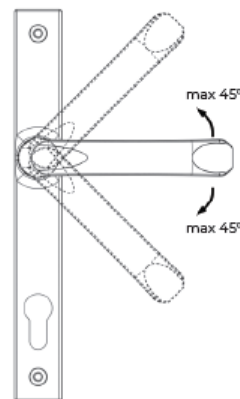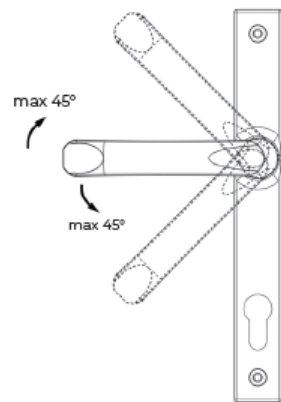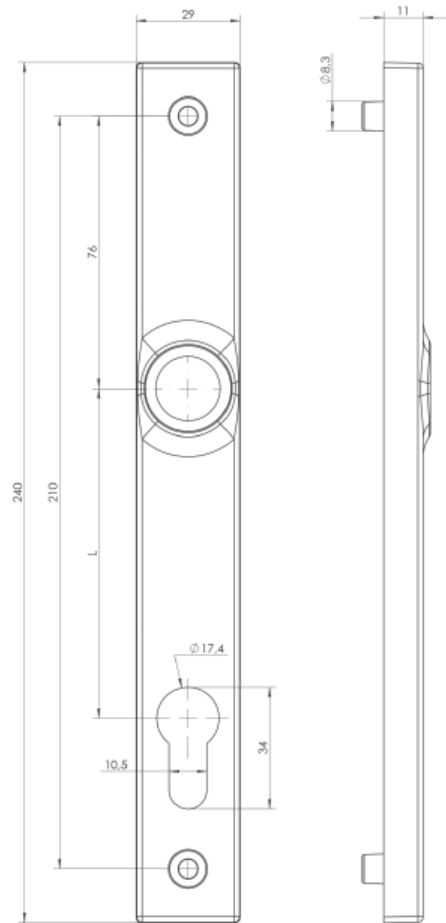


ESCUTCHEON	L
S1 LONG ESCUTCHEON L72	72
S1 LONG ESCUTCHEON L92	92



[MAIN MENU](#)
[CLASSIC HANDLES](#)

S2, S3

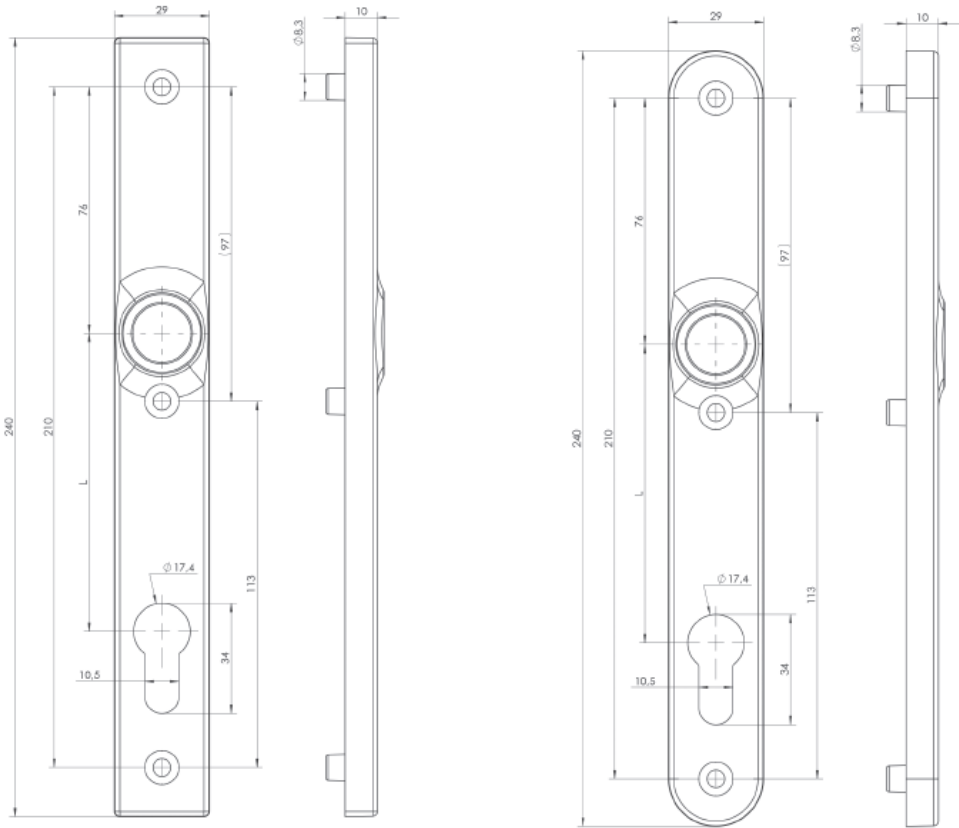

ESCUTCHEON	L
S2, S3 LONG ESCUTCHEON L72	72
S2, S3 LONG ESCUTCHEON L92	92




M2, M3



H2M2

H2M3

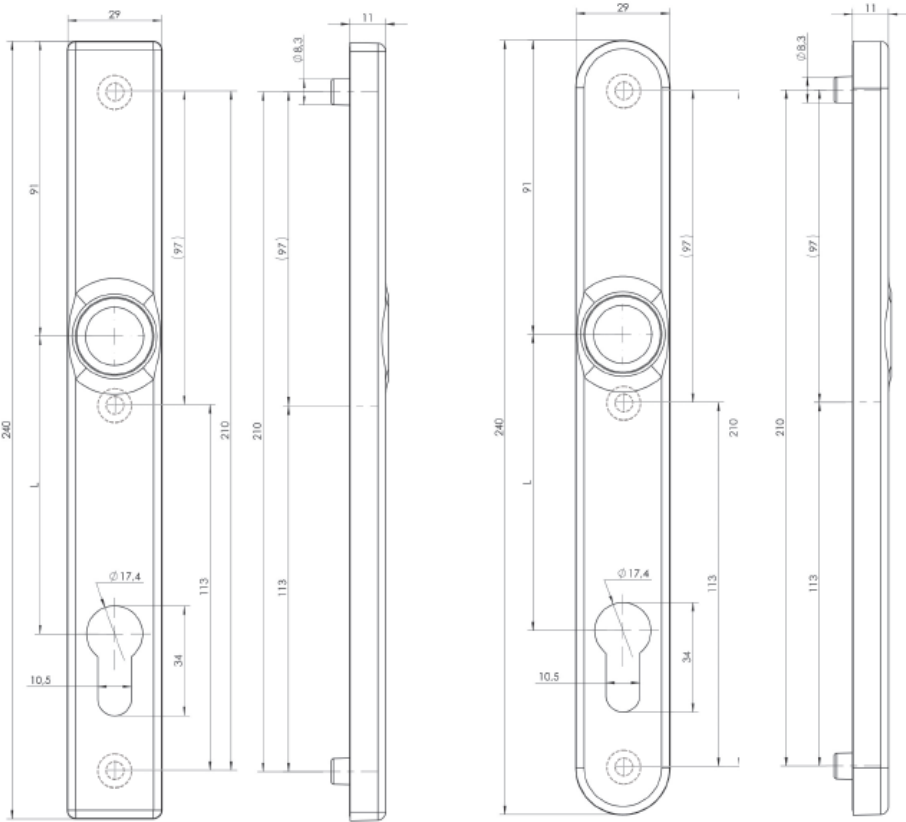

ESCUTCHEON	L
M2, M3 LONG ESCUTCHEON L72	72
M2, M3 LONG ESCUTCHEON L92	92




SK1




H2SK1



G3SK1

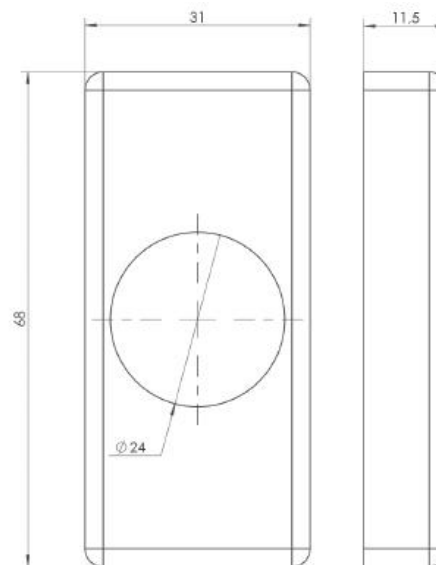





COVER OF A SHORT ESCUTCHEON

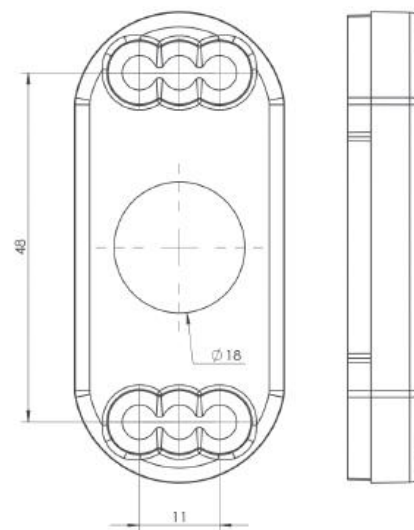

FOR RIVET NUTS DRILL THE HOLE $\varnothing 7$ mm



H6

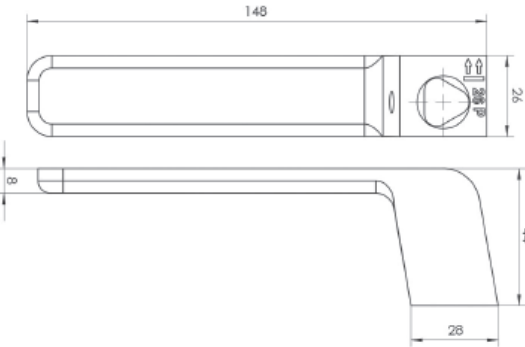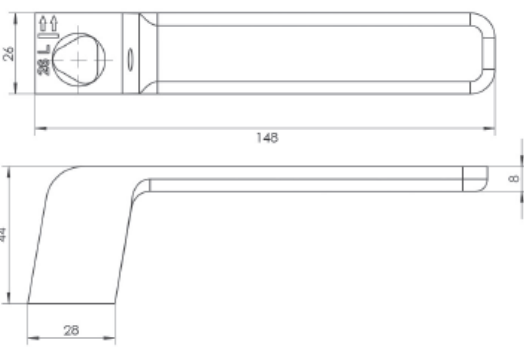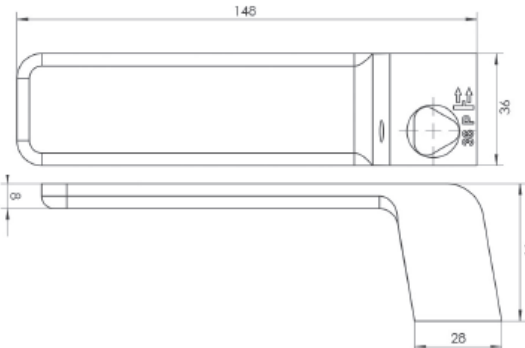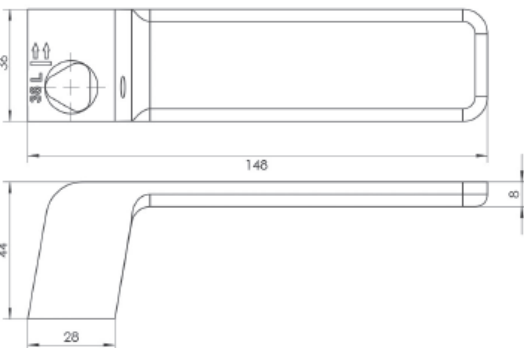	RENDER	RIGHT DOOR HANDLE	LEFT DOOR HANDLE
DOOR HANDLE H6S26			
DOOR HANDLE H6S36			

SINGLE-SIDED HANDLE				
DOOR SIDE	LEFT DOOR		RIGHT DOOR	
	INWARD OPENING	OPENING OUTSIDE	INWARD OPENING	OPENING OUTSIDE
INNER SIDE OF A DOOR	L	P	P	L
OUTER SIDE OF A DOOR	P	L	L	P

LENGTH OF PIVOT	WIDTH OF PROFILE	
	MIN	MAX
65 mm (standard)	65	80
93 mm	93	108


7021


9005


8019


8003


1036W


9016


9006


ANODE NATURAL


GOLD W3


RAL


7016


7024


8077


8017


9001


9010


7035


SILVER






INOX COATING


GOLD W4


C-35 ANODE
BLACK P40



H7

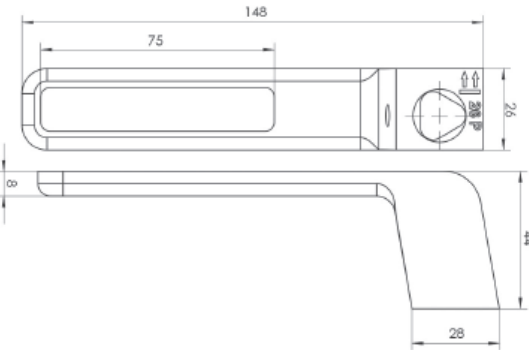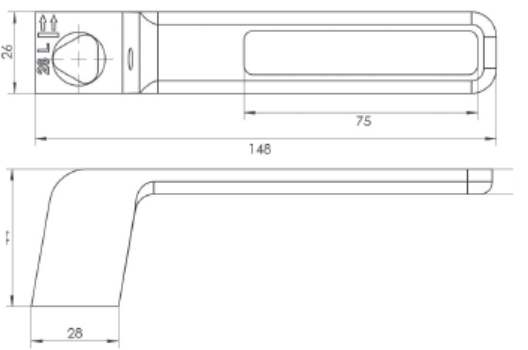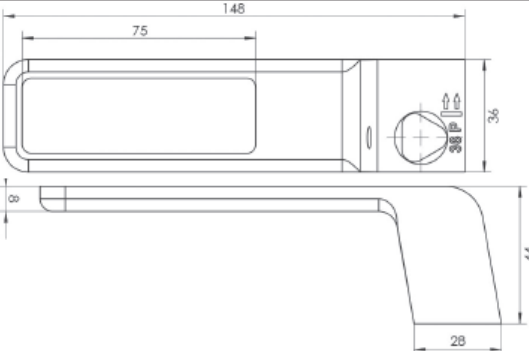
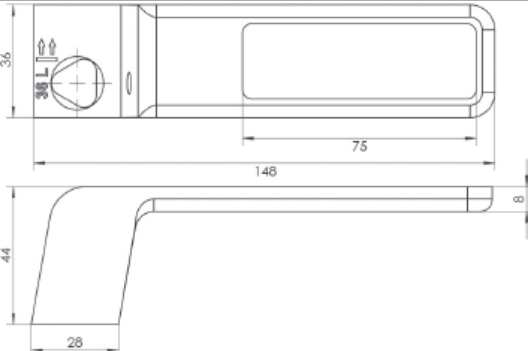
	RENDER	RIGHT DOOR HANDLE	LEFT DOOR HANDLE
DOOR HANDLE H7S26			
DOOR HANDLE H7S36			

SINGLE-SIDED HANDLE				
DOOR SIDE	SINGLE-SIDED HANDLE		RIGHT DOOR	
	INWARD OPENING	OPENING OUTSIDE	INWARD OPENING	OPENING OUTSIDE
INNER SIDE OF A DOOR	L	P	P	L
OUTER SIDE OF A DOOR	P	L	L	P


LENGTH OF PIVOT	WIDTH OF PROFILE	
	MIN	MAX
65 mm (standard)	65	80
93 mm	93	108



G5

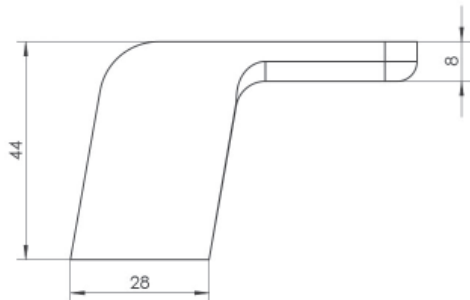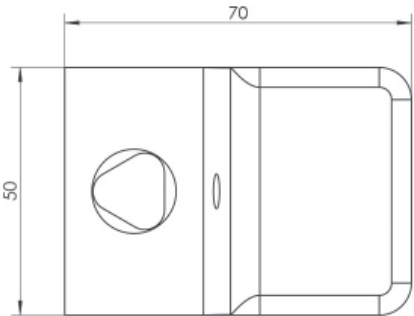

S5S34G6, S5S42G6

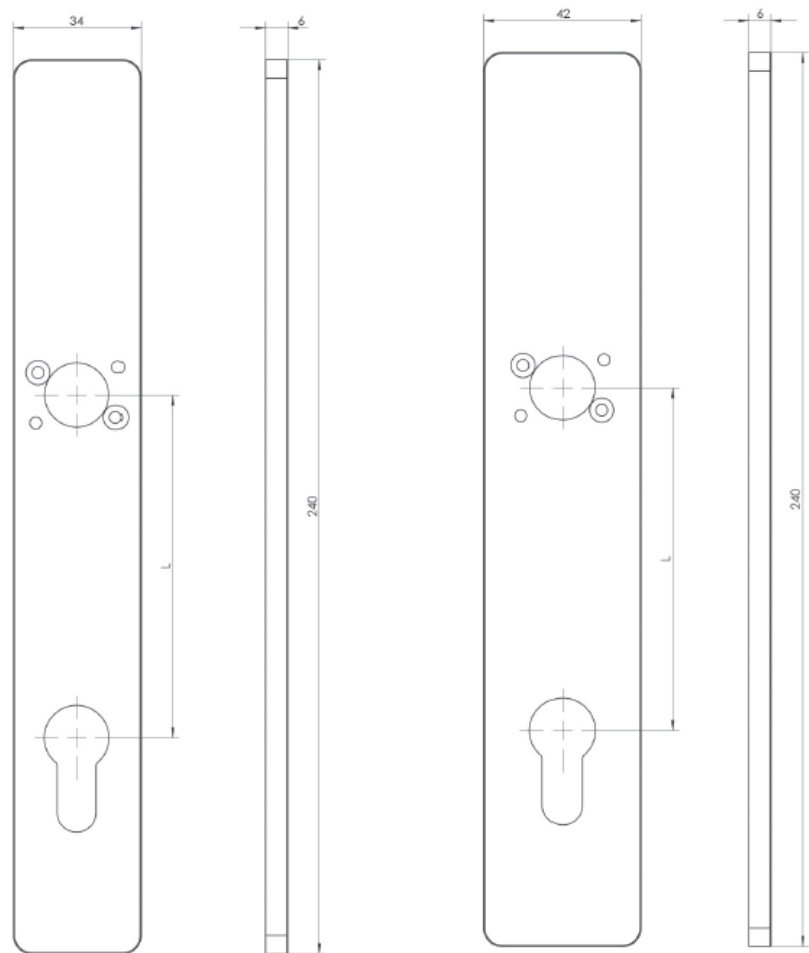

ESCUTCHEON	L	
S5S34G6, S5S42G6 ESCUTCHEON	92 mm	standard
S5S34G6, S5S42G6 ESCUTCHEON	90 mm	individual order
S5S34G6, S5S42G6 ESCUTCHEON	72 mm	individual order




MAIN MENU
CLASSIC HANDLES


SK3





H7S26 SK3S34

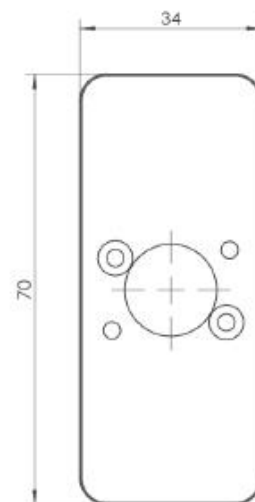

H6S36 SK3S42

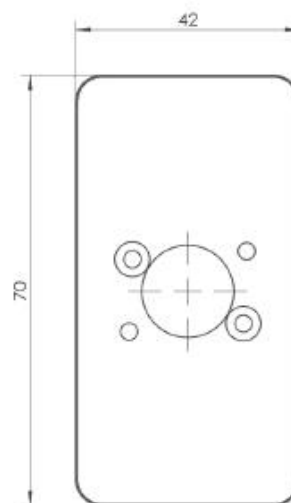

S ESCUTCHEON

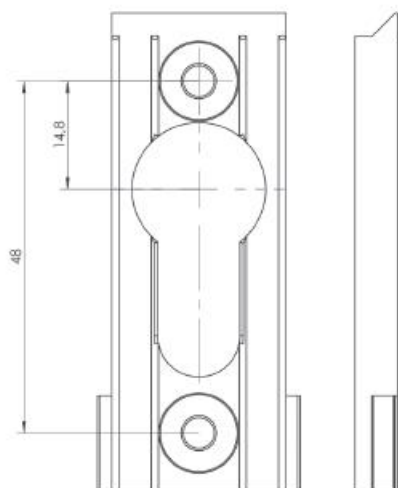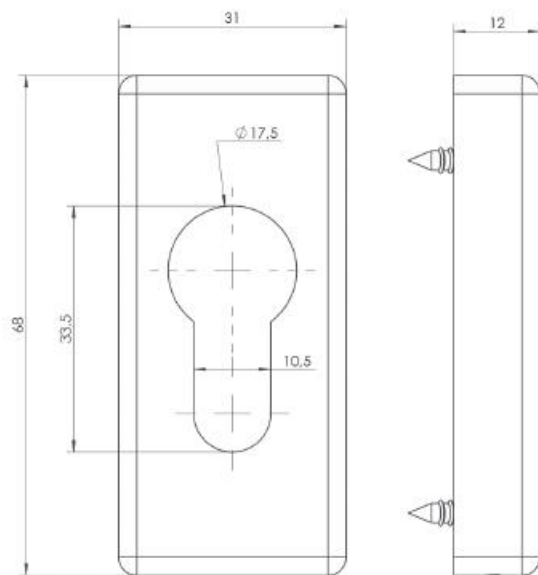

MOUNTING ESCUTCHEON




KN

MAIN MENU
CLASSIC HANDLES


QM ESCUTCHEON



QUICK MONTAGE
ESCUTCHEON OVAL

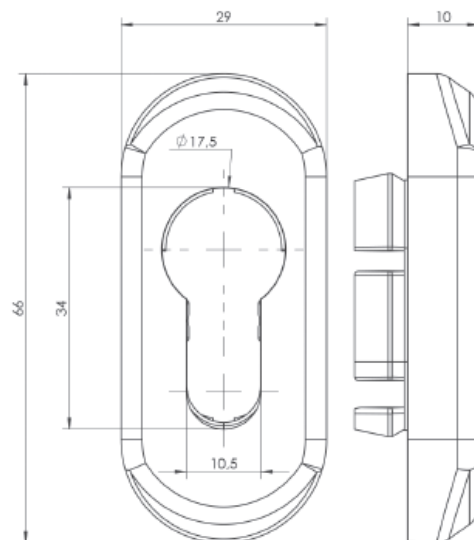

QUICK MONTAGE ESCUTCHEON
RECTANGULAR

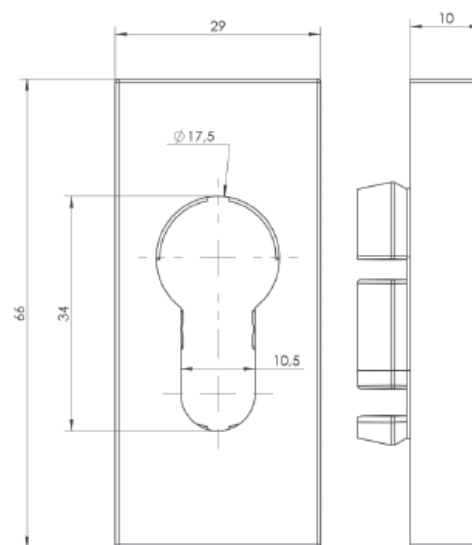


MOUNTING OF A QUICK MONTAGE ESCUTCHEON



Quick montage escutcheon should
be stuck to the profile before
inserting the lock.


TOOLING IN PROFILE FOR A QUICK MONTAGE ESCUTCHEON




GO ESCUTCHEON





GLUE-ON ESCUTCHEON
OVAL

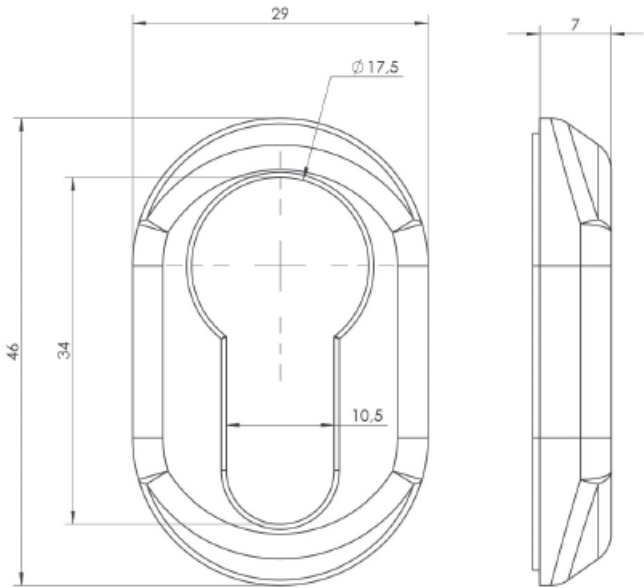

GLUE-ON ESCUTCHEON
RECTANGULAR

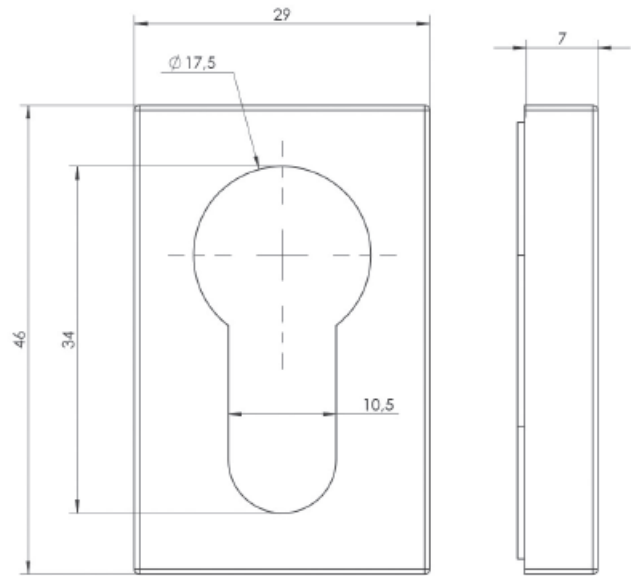



RING LOCK

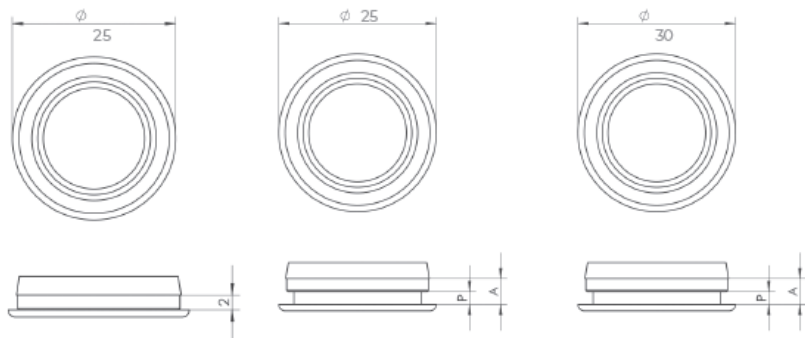




TOOLING IN PROFILE
FOR A RING LOCK INSERT

TYPE OF A RING LOCK INSERT	A	P (PANEL)
RING LOCK INSERT 2mm – WITHOUT PANEL	-	-
RING LOCK INSERT 4mm – PANEL 2mm	4	2
RING LOCK INSERT 5mm – PANEL 3mm	5	3
RING LOCK INSERT 5mm – PANEL 3mm Ø30	5	3

GLUE-ON RING ESCUTCHEON FOR PANEL


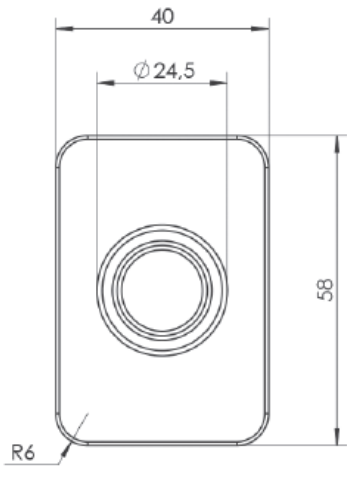


LI ESCUTCHEON

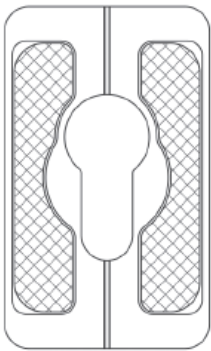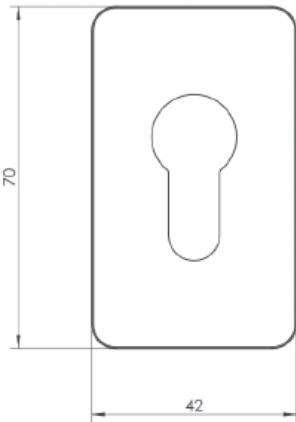

SZ5 SCREWED

MOUNTING ESCUTCHEON

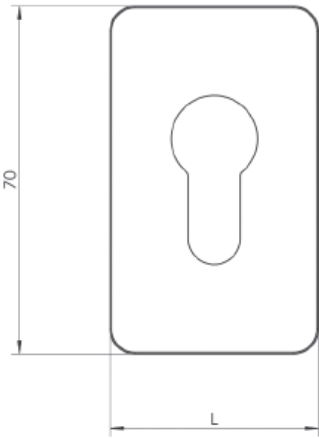


ESCUTCHEON	L [mm]
SZ5S34G6	34
SZ5S42G6	42



- 
7021
- 
9005
- 
8019
- 
8003
- 
1036W
- 
9016
- 
9006
- 
ANODE NATURAL
- 
GOLD W3
- 
RAL
- 
C-35 ANODE BLACK F40
- 
7016
- 
7024
- 
8077
- 
8017
- 
9001
- 
9010
- 
7035
- 
SILVER
- 
INOX COATING
- 
GOLD W4

SR ESCUTCHEON

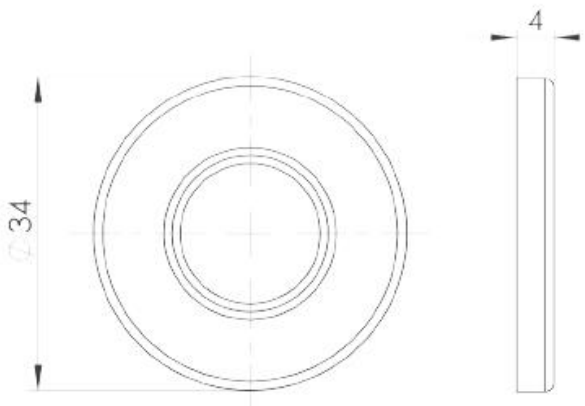

MOUNTING ESCUTCHEON



- | | |
|--------------|----------------------|
| 7016 | 7021 |
| 7024 | 9005 |
| 8077 | 8019 |
| 8017 | 8003 |
| 9001 | 1036W |
| 9010 | 9016 |
| 7035 | 9006 |
| SILVER | ANODE NATURAL |
| INOX COATING | GOLD W3 |
| GOLD W4 | RAL |
| | C-35 ANODE BLACK F40 |